
06. THEVA

Experience High-Fidelity

Generous and assertive, the Theva loudspeakers promise to bring pure musical and Home Cinema experiences into your home. Packed with exclusive Focal technologies like the Slatefiber cone, they boast elegant and modern finishes as well as meticulous details for a refined look that blends seamlessly into any interior. They combine impressive sound performance and outstanding design, embodying the best way to experience High-Fidelity.



FINISHES



Black
High Gloss



Light
Wood



Dark
Wood

KEY POINTS



Slater
cone




Almg
TNF
tweeter



Dolby
Xmos®
effects



Time
Align

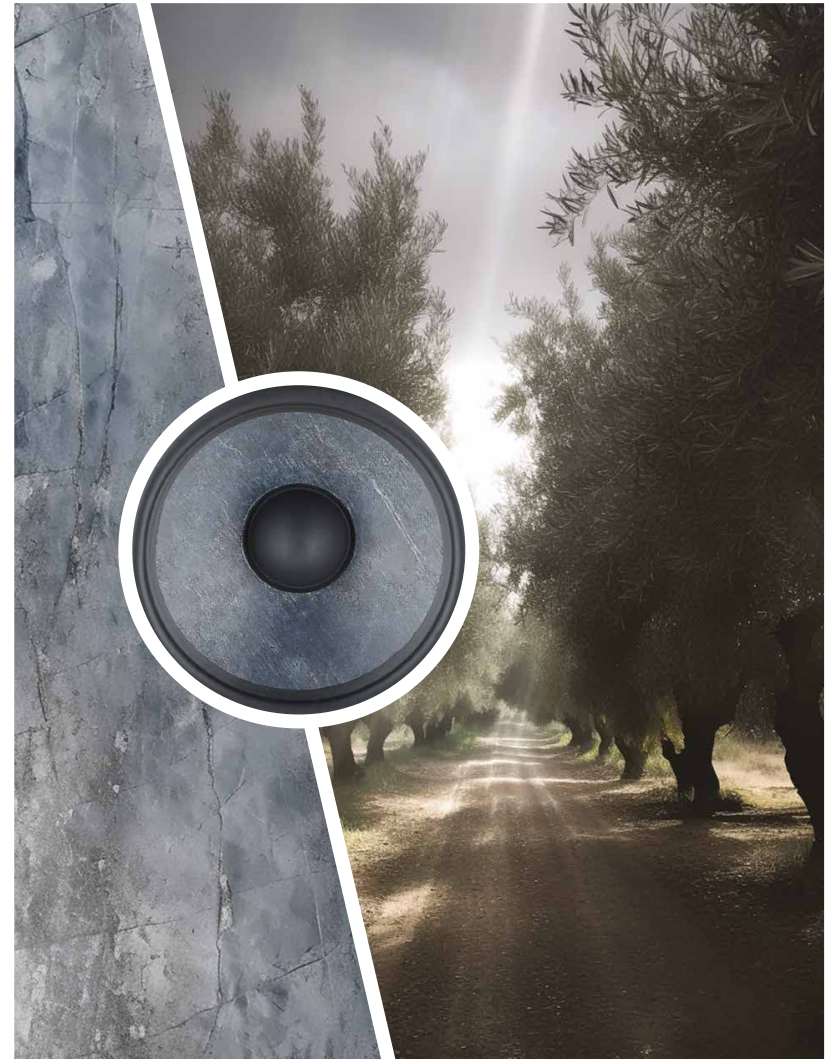



THEVA N°3-D

THEVA N°3

THEVA N°2

THEVA N°1

Type	3-way bass-reflex floorstanding loudspeaker - 1-way sealed	3-way bass reflex floorstanding loudspeaker	3-way bass reflex floorstanding loudspeaker	2-way bass reflex bookshelf loudspeaker
Drivers	<ul style="list-style-type: none"> • 2 x 6½" (16.5cm) Slatefiber Woofer • 6½" (16.5cm) Slatefiber Midrange • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 6½" (16.5cm) Slatefiber Woofer • 6½" (16.5cm) Slatefiber Midrange • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 5" (13cm) Slatefiber Woofer • 5" (13cm) Slatefiber Midrange • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 6½" (16.5cm) Slatefiber Mid-Bass • 1" (25mm) TNF Al/Mg inverted dome tweeter
Frequency response	48Hz - 28kHz Atmos: 100Hz - 20kHz	48Hz - 28kHz	53Hz - 28kHz	58Hz - 28kHz
Low frequency point (-6dB)	39Hz Atmos: 90Hz	39Hz	45Hz	49Hz
Crossover frequency	270Hz / 2,700Hz	270Hz / 2,700Hz	280Hz / 2,900Hz	3,000Hz
Sensitivity (2.83V/1 m)	91dB	91dB	90dB	89dB
Nominal impedance	8Ω (min 2.9Ω) Atmos: 6Ω	8Ω (min 2.9Ω)	8Ω (min 4Ω)	8Ω (min 4.6Ω)
Recommended amplifier power	40 - 250W	40 - 250W	40 - 200W	25 - 120W
Dimensions (HxWxD)	40½ x 8½ x 15¼" (101.9 x 21.2 x 38.8cm)	39 x 8½ x 15¼" (98.9 x 21.2 x 38.8cm)	36½ x 7½ x 13⅞" (93.1 x 19.1 x 35.2cm)	15½ x 8½ x 10¼" (39.2 x 21.2 x 26cm)
Net weight (by unit)	48lbs (22kg)	44lbs (20kg)	37lbs (17kg)	15lbs (7kg)
Finishes				



THEVA CENTER

THEVA SURROUND

Type	2-way sealed center loudspeaker	2-way sealed surround loudspeaker
Drivers	<ul style="list-style-type: none"> • 2x 6½" (16.5cm) Slatefiber Mid-Bass • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2x 6½" (16.5cm) Slatefiber Mid-Bass • 1" (25mm) TNF Al/Mg inverted dome tweeter
Frequency response	59Hz - 28kHz	80Hz - 28kHz
Low frequency point (-6dB)	51Hz	67Hz
Crossover frequency	2,100Hz	3,000Hz
Sensitivity (2.83V/1 m)	91dB	89dB
Nominal impedance	8Ω (min 3.8Ω)	8Ω (min 4.5Ω)
Recommended amplifier power	40 - 200W	25 - 100W
Dimensions (HxWxD)	8¼ x 20⅞ x 10" (21 x 53 x 25cm)	17½ x 12⅞ x 4" (44.5 x 10.7 x 31.6cm)
Net weight (by unit)	22lbs (10kg)	11lbs (5.5kg)
Finishes		



SUB 600P

Subwoofer (see p.47)



THEVA N°1 STAND

Height: 21½ (55cm)
Black finish



THEVA CENTER STAND

Height: 17½ (45cm)
Black finish