



► **FOIL CAPACITORS AUDYN® MKT 160V**

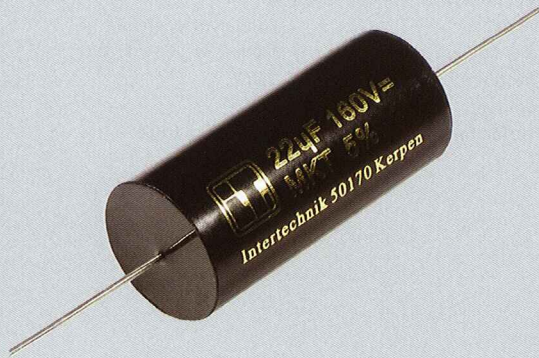

Foil Capacitor with Polyester foil

Connections: Copper Wire, tinned  
 Design: packed coil  
 Connection Length: 42.0 mm  
 Diameter Connection Wires: to 8.2 µF - 0.80 mm.  
 from 10.0 µF - 1.0 mm  
 Capacity Region: from 1.0 µF to 100.0 µF  
 Wire Voltage: 160 V  
 C-tolerance: ± 5 %  
 Loss Factor  $\tan \delta$  : < 0.006 at 1 kHz  
 Series capacitor for the midrange and high range region

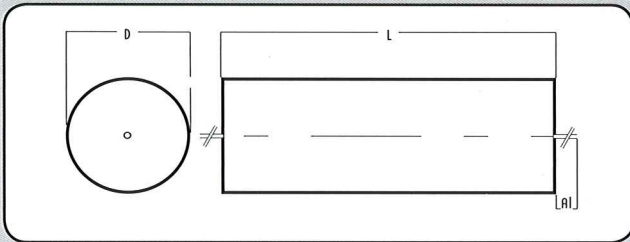

**MKTA • 160 Volt**

Description	C/µF	DxL/mm	Order Number
MKTA/1.0/160	1.0	8.5x18.5	134 1200
MKTA/1.5/160	1.5	8.5x24.5	134 1205
MKTA/2.2/160	2.2	11.0x24.5	134 1210
MKTA/2.7/160	2.7	11.5x24.5	134 1215
MKTA/3.3/160	3.3	13x24.5	134 1220
MKTA/3.9/160	3.9	16x24.5	134 1225
MKTA/4.7/160	4.7	16x24.5	134 1230
MKTA/5.6/160	5.6	18x24.5	134 1233
MKTA/6.8/160	6.8	16.5x30.5	134 1235
MKTA/8.2/160	8.2	18x30.5	134 1240
MKTA/10/160	10.0	18x30.5	134 1245
MKTA/15/160	15.0	17.0x45.5	134 1247
MKTA/22/160	22.0	21.0x45.5	134 1248
MKTA/33/160	33.0	22.0x55.5	134 1451
MKTA/47/160	47.0	55x27	134 1452
MKTA/68/160	68.0	55x31	134 1453
MKTA/82/160	82.0	37x55.5	134 1455
MKTA/100/160	100.0	39.5x55.5	134 1454