

2X-FR-S-99

Addressable Fire Panel Repeater - Small cabinet - English UK

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panel repeaters supplied in local language come with a 2010-2-NB network board already fitted. Except for having no addressable loops and corresponding programmable outputs, the setup is similar as a normal fire panel. It and has its own power supply, 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

Options

The repeaters use a node on the network, similar like a normal panel with a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 24 zone fire/fault LED indicator board can be mounted in the panel or repeater with space for a 4 digit number.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Details

- Local or global repeater with or without global control functionality
- Up to 24 LED Zone indicators for Fire and Fault with space for a 4 digit number
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 24 hours standby time and 30 minutes alarm
- Comes standard fitted with network board

2X-FR-S-99

Addressable Fire Panel Repeater - Small cabinet - English UK

Technical specifications

Electrical

Power supply type	VAC
Operating voltage	110/230 VAC (+10%/-15%)
Current consumption	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A

Standby battery

Capacity	Max. 2 x 12V/7.2Ah (use supplied cables)
----------	--

Physical

Physical dimensions	410 x 162 x 298 mm (W x H x D)
Net weight	5.2 kg (without battery)
Shipping weight	6.6 kg
Colour	Grey (RAL 7035)
Mounting type	Surface Mount
Cable entries	9 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)

Environmental

Operating temperature	-5 to +40°C
Storage temperature	-10 to +50°C
Relative humidity	95% max. noncondensing
Environment	Indoor
IP rating	IP30: for indoor use only

Standards & regulation

Compliance	NBNS21-100, NEN2535, LPCB, BS5839-1, VdS
Certification	EN54-2, EN54-4, EN54-21
Standards	EN54-2 EN54-4 EN54-21
Environmental	CPD WEEE RoHS

Mains supply

Voltage	230 / 110 VAC (+10% / -15%)
Frequency	50 / 60 Hz (±5%)
Current	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A
Fuse rating	2 / 4 A
Cable type	3 x 1.5 mm ² (live, neutral, earth)

Batteries

	Max. 2 x 12V/7.2Ah (use supplied cables)
--	--

Outputs

General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)
General Fire + Fault relay	2
Aux	1 resetable, 500mA / 19.5-28VDC (24VDC nominal)
Cable type	Recommended 2 core 1.5 mm ² twisted pair
End of Line resistor	15kohm

Inputs


Programmable	2
Cable type	Recommended 2 core 1.5 mm ² twisted pair
End of Line resistor	15kohm
Maximum Load	150 mA

Environmental conditions

Storage temperature	-10°C to +50 °C
Operating temperature	-5°C to +40 °C
Relative humidity	max. 95 % (non-condensing)

Mechanical

Size (W x D x H)	410 x 162 x 298 mm
Weight	5.2 kg (without batteries)
Color	RAL7035
Cable entries (Top / Bottom / Back)	9 (20mm) / 2 (20mm) / 2 removable plates
IP rating	IP30: for indoor use only

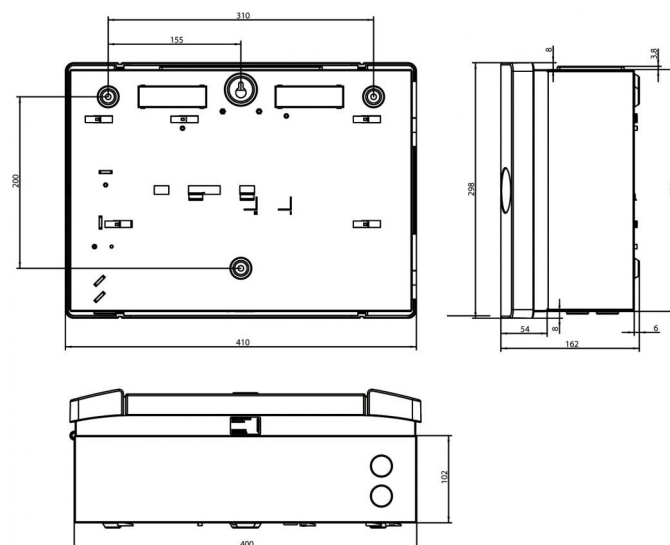

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

30 April 2019 - 13:07