


## Mechanical Installation Instructions

**Figure 1:** Dimensions are for a ComNet™ mini module.

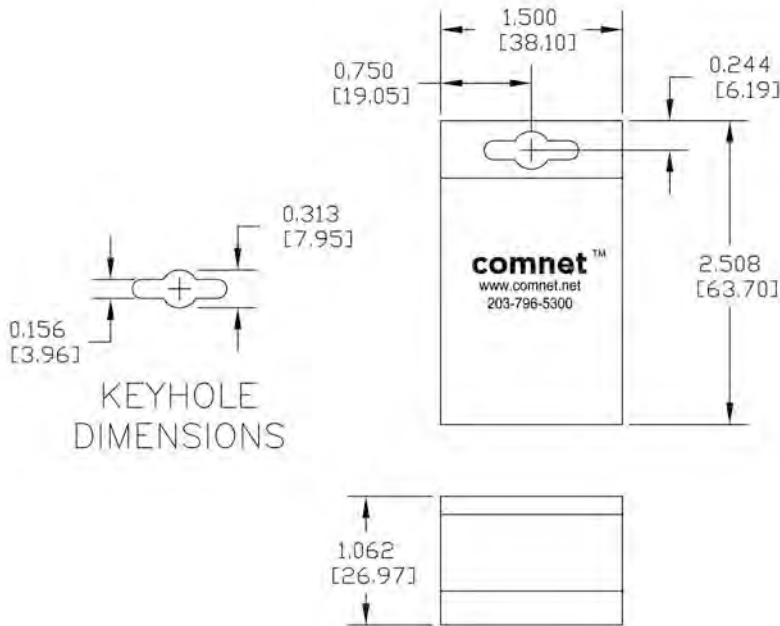

### Installation Considerations

This fiber-optic link is supplied as a Standalone module. Units should be installed in dry locations protected from extremes of temperature and humidity.

### Standalone Module:

The unit is provided with a mounting plate with a hole for one No. 6 pan head screw (3-mm or 3.55-mm).

**Attach the module to a solid piece of wood using one No. 6 pan head wood screw with a minimum penetration into the wood of 3/4 inch. (Screw not supplied) See figure 1.**

1. Determine where the module will be installed, and ensure that there is adequate space at both ends for making the various cable connections and for reading the diagnostic LEDs.
2. Attach the module to a flat surface using one mounting screw. (Not Supplied)


**Power Sources** - The product should only be operated from the recommended power source. Use only a UL Class 2 indoor/dry or Class 3 outdoor/wet power supply.

**WARNING:** Unit is to be used with a Listed Class 2 or LPS power supply rated 9-12 VDC @ 1A.

**WARNING:** This unit should be installed in a restricted access location; available through the use of a lock and key or other means of security. Access should be limited to service personnel who have been instructed about the reasons for the restrictions to the location. Any and all precautions should be taken and controlled by the authority responsible for the location.

## INSTALLATION INSTRUCTIONS

## MINI VIDEO TRANSMITTER

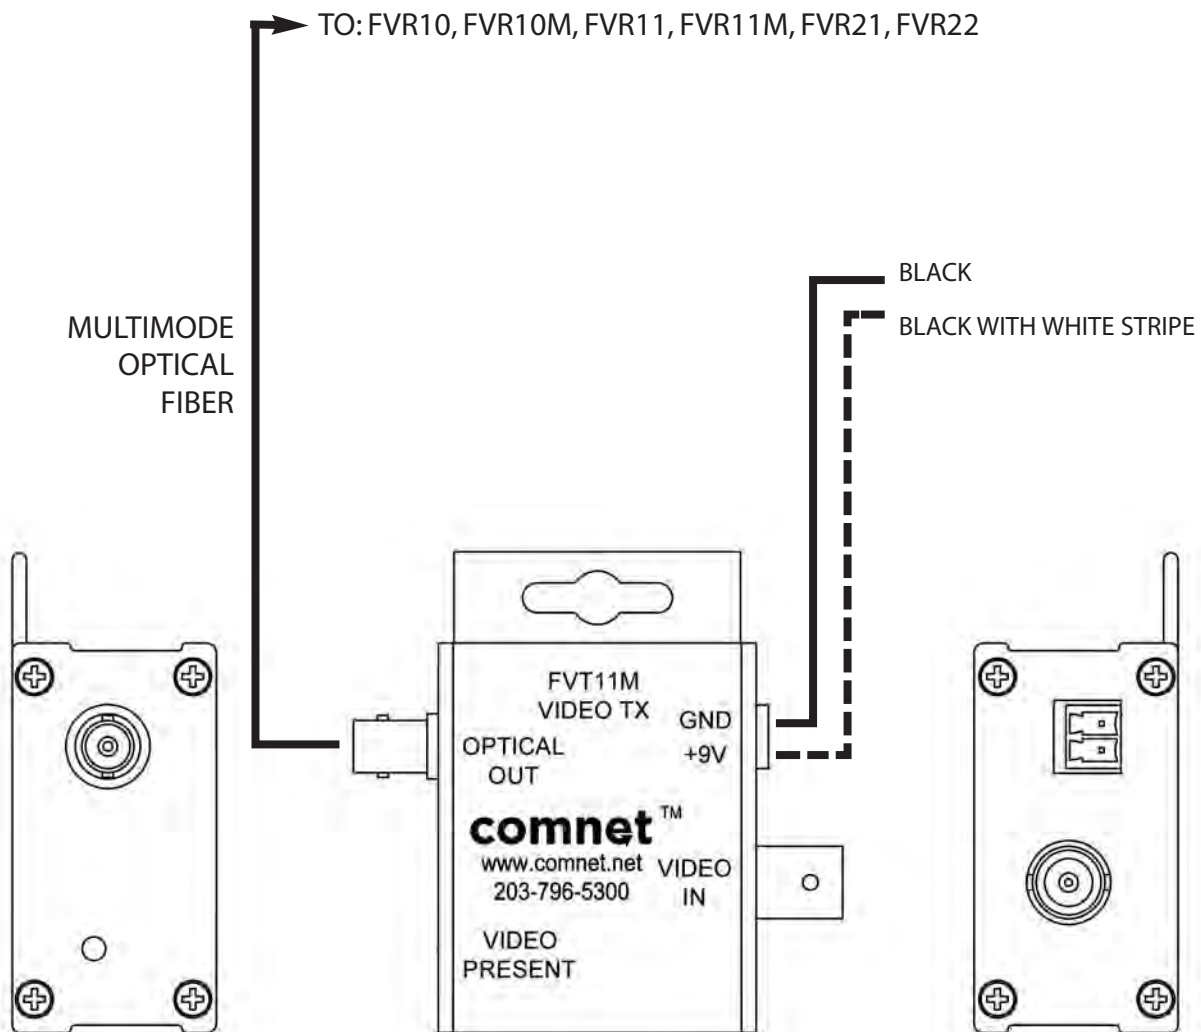

**LEDS:** RED = "No Activity"

GRN = "Activity"

**NOTE:** RED DOES NOT MEAN "Error"

### Communication Networks

3 Corporate Drive • Danbury, CT 06810 • USA

Tel: 203-796-5300 • Toll Free: 1-888-678-9427

www.comnet.net