



SUB 905-AS MK3

PROFESSIONAL POWERED 15" SUBWOOFER



Description

The SUB 905-AS MK3 is a self-powered extended low-frequency subwoofer with internal DSP. Its compact cabinet houses a state-of-the-art 15" transducer featuring ceramic magnets and a 3.0" voice coil. The internal amplifier manages up to 2200W power output, delivering sound pressure levels up to 133 dB. Proprietary Bass Motion Control processing provides extended linearity and remarkable sound integrity. Rear panel controls include presets, crossover frequency, and polarity selection, cardioid, and output delay settings. The tour-ready, rugged all-wood cabinet with scratch-resistant polyurea coating is stackable and lightweight, ensuring quick set-ups and tear-downs. Built specifically for highly demanding applications, SUB 905-AS MK3 is the perfect workhorse for music professionals.

Features

- › 2200 W
- › 133 dB max SPL
- › 40 Hz - 120 Hz frequency response
- › 15" Woofer, 3.0" v.c.
- › Multi-ply hardwood polyurea-coated
- › Selectable gain, X-over, cardioid mode and time delay
- › Stereo XLR input, Stereo XLR signal output

Part Number


13000846 SUB 905-AS MK3	EU	100-240 V	Black	EAN 8024530021146
13000847 SUB 905-AS MK3	US	100-240 V	Black	EAN 8024530021351



SUB 905-AS MK3

PROFESSIONAL POWERED 15" SUBWOOFER

Line Art 2D

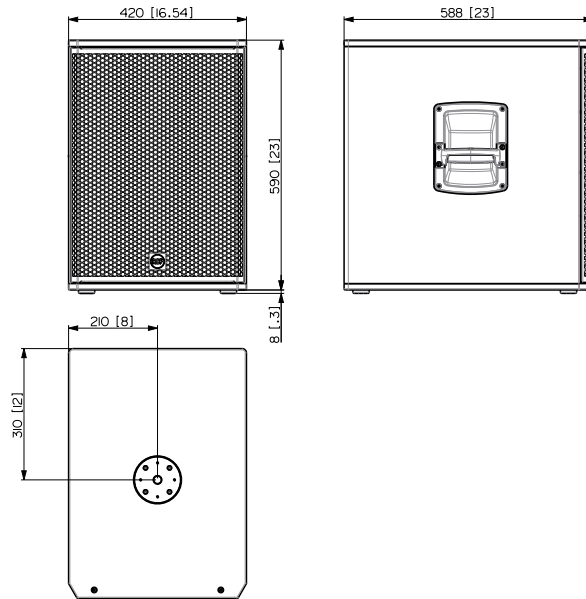

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	40 Hz ÷ 120 Hz
	Max SPL @ 1m	133 dB
Transducers	Woofer	15", 3.0" v.c
Input/Output section	Input connectors	XRL Stereo
	Output connectors	XRL Stereo
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	Selectable
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Gain, EQ, phase, xover, delay, cardioid
Power section	Total Power	2200 W Peak, 1100 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plywood
	Handles	One handle each side
	Pole mount/Cap	Yes
	Grille	Steel with clothing
	Color	Black
Size	Height	590 mm / 23.23 inches
	Width	420 mm / 16.54 inches
	Depth	590 mm / 23.23 inches
	Weight	31.3 kg / 69 lbs

ACCESSORIES

Protections	CVR 004	13360529	8024530020415
Rigging / Mounting	PM-KIT M20	13360067	8024530014599