

SL / SLA LED - Ref. D14852 / SLA 2000 LED / A0787A710900 / 2862201



Several configurations possible thanks to the different choices of lenses, light patterns ...

As standard this work light includes features such as the EMC CISPR25 class 5 as well as the integrated load dump, to meet the most severe manufacturer specifications.

TECHNICAL CHARACTERISTICS

Brand	ABL
Product Type	Work light
Reference detail	D14852 (Crystal, Flood, Hardened glass)
Voltage	12/24 V
Source	LED
Amperage	1,2 AMP at 24V
Consumption	29W
Operational Lumen	2000 Lumen
Color Temperature	6000 K for crystal version
Light pattern	Flood
Color	Crystal
Connector	DT 2 pin
Mounting	Pedestal
Fixation	To be screwed
Lens Material	Hardened glass
Housing Material	Aluminium

www.vignal-group.com - contact@vignal-group.com

France Lyon HQ : +33 (0)4 72 917 917
France Caen : +33 (0)2 31 74 73 13
France Le Mans : +33 (0)2 43 50 14 14

Switzerland Rancate : +41 (0) 91 640 50 80
US Mosinee : +1 715 693 1530
China Changzhou : +86 137 7686 3469



Print date : 14/01/2025

SL / SLA LED - Ref. D14852 / SLA 2000 LED / A0787A710900 / 2862201




Shape	Square
Width	102 mm
Depth	63 mm
Height	97 mm
Weight	0,55 Kg
IP protection	IP68 - IP69K
Polarity	Protected against reverse voltage
Electronic Thermal Management	Full output at +35°C ambient, 25 % dimmed at + 50°C ambient
Operation Temperatures	-40°C to +85°C
Load Dump	36V CONTINUOUS / ISO 7637-2 Pulse 5a
Salt Spray Test	ISO 9227
Vibration Resistance	15 Grms, from 24Hz to 2000Hz
Shock resistance	60G
Lifetime	30 000 operating hours
EMC	ISO 13766 - ISO 14982 - ISO 12985 - CISPR25 Class 5
Industry	Agriculture, Construction, Handling and Forklifts, Priority vehicle, Trailers and Semi-trailers, Trucks, Vans and Chassis cab

APPLICATIONS

Manufacturer	Model	Reference	Start date	End date
SCANIA	R	2862201	11/2020	

OTHER VISUALS

SL / SLA LED - Ref. D14852 / SLA 2000 LED / A0787A710900 / 2862201

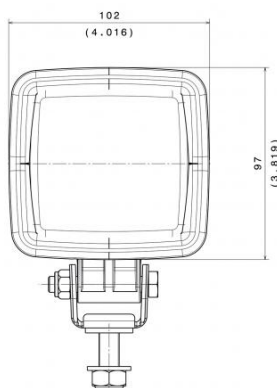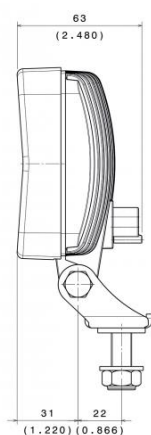


ACCESSORIES



D14170

**CONN - Repair kit
connector Deutsch 2
way DT 06-2S female**



R12486

**FCA - Harness 2C 2
pin Deutsch F / Click
in**