

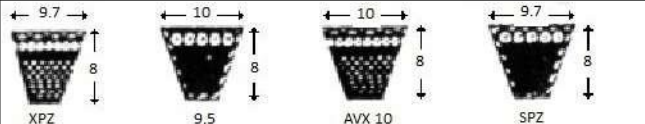

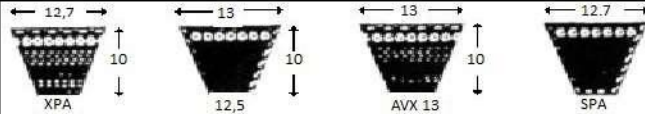
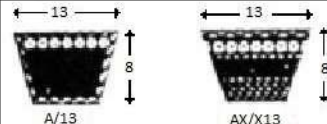
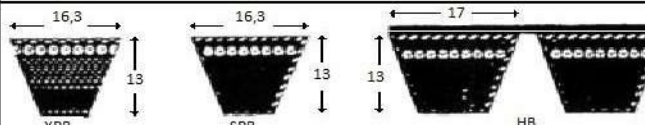
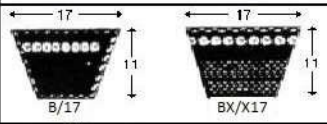

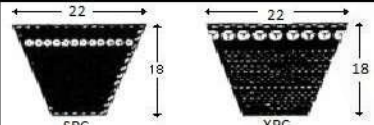
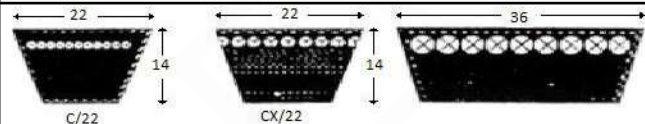


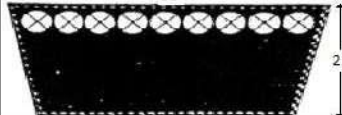


Conversie Curele

PROFIL		Lungimea de funcționare	La=Li+ ↓ mm	La=Lp+ ↓ mm	Lp=Li+ ↓ mm	Diametrul roții minim recomandat
		Li/Lp	31	12	19	8=40
		SPZ, XPZ Lp 9.5 AVX10 La	50	13	37	SPZ=63mm XPZ=56mm
		Z/10 Li/Lp ZX Lp	38	13	25	10=50mm ZX=40mm
		SPA XPA Lp 12.5, AVX13 La	63	18	45	SPA=90mm XPA=71mm
		A/13 Li/Lp AX Lp	50	20	30	13=71mm AX=63mm
		SPB XPB Lp HB La	82	22	60	SPB=140 XPB=112
		B/17 Li/Lp BX Lp	69	26	43	17=112 BX=90
		Li/Lp	79	31	48	20=160
		Lp	113	30	83	SPC=224 XPC=180
		CX/Lp C/22, 36 Li/Lp	88	30	58	22=180 CX=140
		Li	100	39	61	25=250
		Li	126	51	75	32=355
		Li	138	58	80	---