


## Grounding Clip, with Clenergy Logo

### Assembly

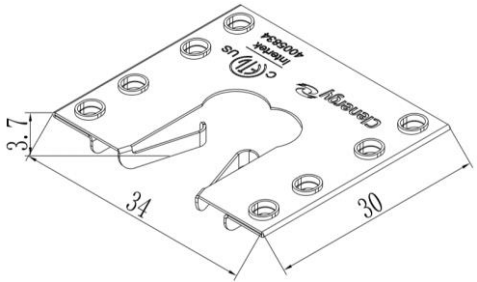


### Component



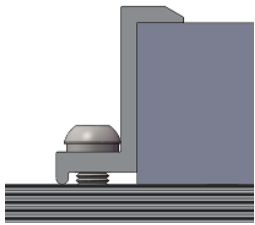
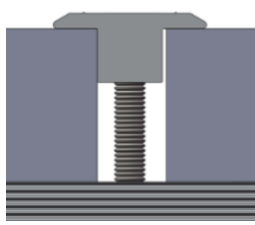
Grounding Clip, with Clenergy Logo  
Part No.: EZ-GC-ST

### Technical Specification

|               |                                                             |                                                                                      |
|---------------|-------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Application   | For Clenergy' s PV Mounting System                          |  |
| Fixing method | Fixing under clamp                                          |                                                                                      |
| Dimensions    | W34mm*L30mm*H3.7                                            |                                                                                      |
| Weight        | 0.003 kg                                                    |                                                                                      |
| Packaging     | 1000 units per pack, 4 packs (4000 units) per carton        |                                                                                      |
| Material      | SUS304 1/2H                                                 |                                                                                      |
| Color         | Silver                                                      |                                                                                      |
| Standard      | GB50797   AS NZS1170.2-2011   EN1991   JISC8955   ASCE 7-10 |                                                                                      |

## Module Inter and End Clamp, Security Series

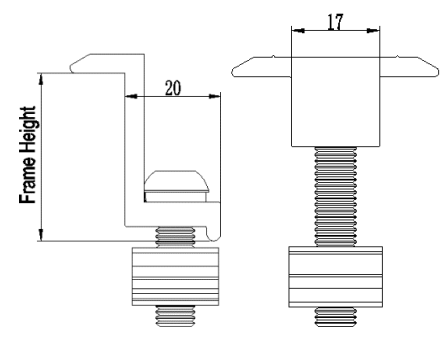
### Assembly

|                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| Fixing the framed panel with End Clamp                                            | Fixing the framed panel with Inter Clamp                                            |

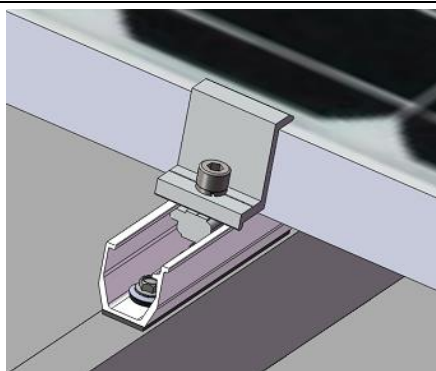
### Component

|                                                                                                                                  |                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|                                                 |                                                 |
| End Clamp, Security Series<br>Part No.: ER-EC-ST35/S (bar code: 13-11011-011)<br>Part No.: ER-EC-ST40/S (bar code: 13-11011-012) | Inter Clamp, Security Series<br>Part No.: ER-IC-ST35/S (bar code: 13-11023-001)<br>Part No.: ER-IC-ST40/S (bar code: 13-11023-005) |

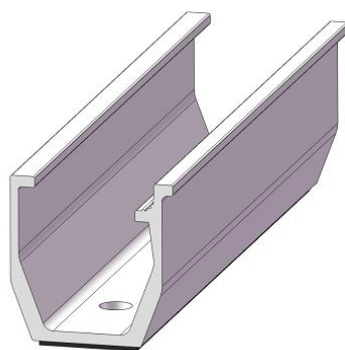
### Technical Specification

|                     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application         | ER-EC-ST35/S is for framed PV Module of 35-37 mm high (with ECO-Rail and T-Rail)<br>ER-EC-ST40/S is for framed PV Module of 40-42 mm high (with ECO-Rail and T-Rail)<br>ER-IC-ST35/S is for framed PV Module of 29-36 mm high (with ECO-Rail)/31-36 mm (with T-Rail)<br>ER-IC-ST40/S is for framed PV Module of 34-41 mm high (with ECO-Rail)/36-41 mm (with T-Rail) | <br><br>A driving bit provided in each pack of inter clamp<br><br> |
| Recommended torque  | 16-20 N·m                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                              |
| Packaging           | ER-EC-ST/S: 100 units per pack, 4 packs (400 units) per carton<br>ER-IC-ST/S: 100 units per pack, 4 packs (400 units) per carton<br>Including a special driving bit per pack                                                                                                                                                                                         |                                                                                                                                                                                                                                              |
| Packaging Dimension | L395*W260*H330mm (carton dimension)                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                              |
| Weight              | ER-EC-ST35/S: 0.059 Kg; 25.07 Kg (carton weight)<br>ER-EC-ST40/S: 0.062 Kg; 26.27 Kg (carton weight)<br>ER-IC-ST35/S: 0.075Kg; 31.47 Kg (carton weight)<br>ER-IC-ST40/S: 0.087 Kg; 36.27 Kg (carton weight)                                                                                                                                                          |                                                                                                                                                                                                                                              |
| Material            | Main Structure: AL6005-T5<br>Fasteners: SUS 304                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                              |
| Color               | Silver (half-anodized no less than 10 μm)                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                              |
| Standard            | AS NZS1170.2-2011                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                              |

## U Support

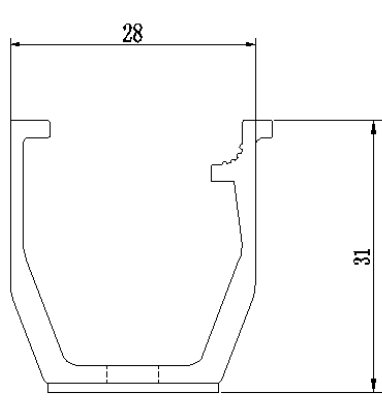


### Component



U Support  
Part No.: ER-S-U/120

### Technical Specification

|               |                                                             |                                                                                       |
|---------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Application   | Trapezoidal Roof                                            |  |
| Fixing method | Fixed on the Metal roof with Self-drilling screw            |                                                                                       |
| EPDM          | Pre-fitted (1mm thickness)                                  |                                                                                       |
| Dimensions    | L120mm*W28mm*H31mm                                          |                                                                                       |
| Weight        | 0.062 Kg                                                    |                                                                                       |
| Packaging     | 120 units per carton                                        |                                                                                       |
| Material      | Main parts: AL6005-T5<br>Rubber Pad: EPDM                   |                                                                                       |
| Color         | Silver                                                      |                                                                                       |
| Finish        | Anodized (no less than 10 µm, excluding machined surfaces)  |                                                                                       |
| Standard      | GB50797   AS NZS1170.2-2011   EN1991   JISC8955   ASCE 7-10 |                                                                                       |