

09/2025

|                   | contine    | m <sup>2</sup>       | ft <sup>2</sup>        | greutate |
|-------------------|------------|----------------------|------------------------|----------|
| 1 pachet Chateau+ | 24 placi   | 1,02 m <sup>2</sup>  | 10.94 ft <sup>2</sup>  | 7,3 kg   |
| 1 palet Chateau+  | 48 pachete | 48,77 m <sup>2</sup> | 524.97 ft <sup>2</sup> | 365 kg   |



### specificatii

|   |                         |
|---|-------------------------|
| Dimensiune  | 504 x 84 mm             |
| Grosime totala  | 8 mm                    |
| Sanfrenuri  | 4                       |
| Sistem click  | OmniLoc A & B           |
| Nivel de utilizare conform standardului european EN 10874 | 23 uz casnic intens     |
|   | 33 uz commercial intens |
| Garantie rezidentiala                                     | pe viata                |
| Garantie comerciala                                       | 10 ani                  |



Verifica conditiile de garantie: [www.berryalloc.com](http://www.berryalloc.com).

### compozitie placa


|                      |   |
|----------------------|---|
| Stratul de suprafata | Hartie direct laminata, impregnata cu rasina melaminica.                      |
| Substratul           | HDF rezistent la umiditate, tratat cu tehnologie de respingere a apei hydro+. |
| Supportul            | Hartie direct laminata, impregnata cu rasina melaminica.                      |

### rezultatele testelor

|  |                   |  |
|--|-------------------|--|
| Rezistenta la abraziune  | ISO 24338 A       | AC5 (IP ≥ 6000)  |
| Rezistenta la impact   | EN 17368/EN 13329 | bila mica : ≥ 70 mm – bila mare : ≥ 750 mm   |
| Deformare  | ISO 24336         | 12% (necesar ≤ 15%)  |
| Rezistenta la apa/umiditate  | ISO 4760          | mai mult de 24 ore   |
| Rezistenta la foc  | EN 13501-1        | Cfl-S1   |
| Emisii de Formaldehide   | EN 717-1          | E1   |
| Rezistenta la alunecare  | EN 13893          | DS   |
| Densitate  | EN 323            | 900 kg/m <sup>3</sup>  |
| Rezistenta la patare   | EN 438            | 5 (groups 1+2) ; 4 (group 3)   |
| Efectul la utilizarea picioarele de mobilier                                 | EN ISO 16581      | Nicio paguba (picior tip 0)  |
| Efectul la utilizarea scaunelor cu rotile                                    | EN ISO 4918       | Nicio paguba (roti de tip W), 20.000 de cicluri  |
| Rezistenta termica in combinatie cu underlay-ul BerryAlloc - Excellence Plus | ISO 8302          | 0,08 m <sup>2</sup> K/W – Potrivit pentru incalzire/racire prin pardoseala. Instructiuni detaliate pe <a href="http://www.berryalloc.com">www.berryalloc.com</a> . |




\*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



09/2025

### Structura produsului

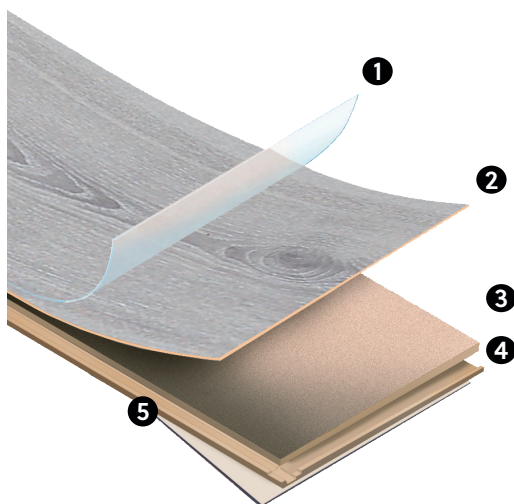

- ❶ **Strat protector** care determina rezistenta si durabilitatea pardoselii dumneavoastra
- ❷ **Hartie decorativa** pentru design
- ❸ **Un miez de fibra de densitate mare (HDF)**
- ❹ **Un strat de echilibrare** pentru a stabili și proteja miezul HDF
- ❺ **Acoperirea hidro+ rezistenta la apa**

(\*) Disponibil pentru colectiile noastre Ocean+ si Chateau+.