

# TECHNICAL SPECIFICATIONS

## Cool radiator:

The Cool model is supplied with centre distances from 400 to 600 mm.

The Cool model is supplied with heights from 858 to 1740 mm.

Double hydraulic connection available: traditional and central from below (AC acronym).




Connections: G 1/2"

Height:

858 - 1152 - 1488 - 1740

Centre distances:

400 - 450 - 500 - 550 - 600

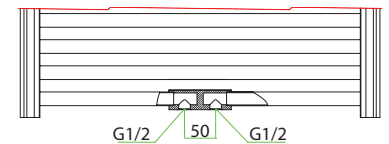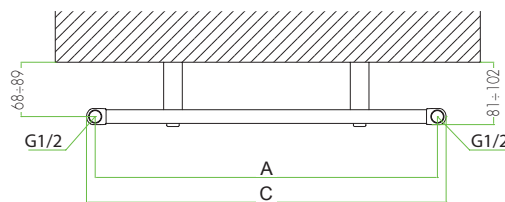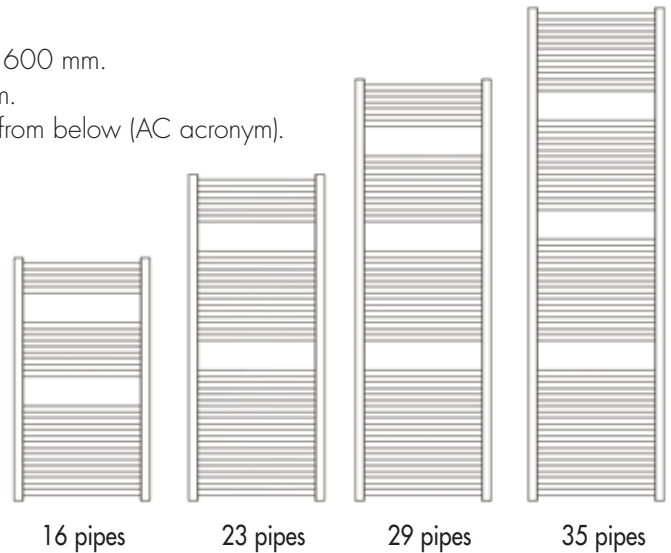

## Technical specifications

Height	Model	Depth	Centre-to-centre	Width	Water content	Weight	Heat output ΔT 30 K	Heat output ΔT 50 K	Exponent	Coefficient
[B] mm		mm	(A) mm	(C) mm	litres	kg	W	W	n	K <sub>m</sub>
858	COOL 860/400	26	400	428	2,4	3,0	188	348	1,2015	3,1596
	COOL 860/450		450	478	2,7	3,2	196	370	1,2443	2,8430
	COOL 860/500		500	528	2,9	3,4	211	399	1,2468	3,0374
	COOL 860/550		550	578	3,2	3,6	226	428	1,2492	3,2277
	COOL 860/600		600	628	3,4	3,7	241	457	1,2517	3,4143
1160	COOL 1160/400	26	400	428	3,4	4,2	248	458	1,2029	4,1431
	COOL 1160/450		450	478	3,8	4,5	265	502	1,2479	3,8033
	COOL 1160/500		500	528	4,1	4,7	288	544	1,2487	4,1156
	COOL 1160/550		550	578	4,5	4,9	310	587	1,2495	4,4259
	COOL 1160/600		600	628	4,9	5,1	333	630	1,2502	4,7339
1490	COOL 1490/400	26	400	428	4,4	5,2	322	595	1,2045	5,3470
	COOL 1490/450		450	478	4,8	5,7	347	658	1,2520	4,9057
	COOL 1490/500		500	528	5,2	5,9	378	717	1,2509	5,3720
	COOL 1490/550		550	578	5,7	6,3	410	776	1,2497	5,8423
	COOL 1490/600		600	628	6,1	6,5	441	835	1,2486	6,3166
1740	COOL 1740/400	26	400	428	5,3	6,2	379	707	1,2182	6,0193
	COOL 1740/450		450	478	5,7	6,7	413	778	1,2406	6,0741
	COOL 1740/500		500	528	6,3	7,0	451	850	1,2408	6,6300
	COOL 1740/550		550	578	6,8	7,3	489	922	1,2410	7,1851
	COOL 1740/600		600	628	7,5	7,6	527	994	1,2412	7,7391

Maximum working pressure: 1600 KPa (16 bar)

Characteristic equation:  $\Phi = K_m \Delta T^n$ .

Stated heat output values, expressed at ΔT 50K, comply with European Standard EN 442-1:2014 (for a white radiator) and are certified by the MRT Lab of the Milan Polytechnic, notified body no. 1695.

Internal anti-corrosive treatment Aleternum included in the price on all models.

The manufacturer reserves the right to make changes in specifications without prior notice.



FONDITAL S.p.A.  
Via Cerreto, 40 - 25079 VOBARNO (Brescia) Italia  
Tel.: +39 0365 878.31 - Fax: +39 0365 878.304  
E-mail: info@fondital.it - Web: www.fondital.com

COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =

Uff. Pub. Fondital - PUB 03 D 009 - 02\_Giugno 2016 (06/2016)

