

ALESSANDRA ELECTRIC POLISHED STAINLESS STEEL



EUROPEAN
WARRANTY

MATERIAL:

- Vertical collectors in polished stainless steel \varnothing 30 mm.
- Horizontal elements in polished stainless steel 30 x10 mm.
- Glycolate water.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4. hollow brick walls, user notice.

PACKAGING:

The towel rail is protected by recyclable carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:


See page 508

Electrical only:	<input checked="" type="checkbox"/> Simple heater with cable cover (wire for direct wall fixed outlet)	<input checked="" type="checkbox"/> Manual ON/OFF (1200 mm wire lenght with Schuko plug)
Class protection: CLASS 1		Minimum ingress protection: IP 54

CERTIFICATIONS




HOW TO PLACE ELECTRIC TOWEL RAILS

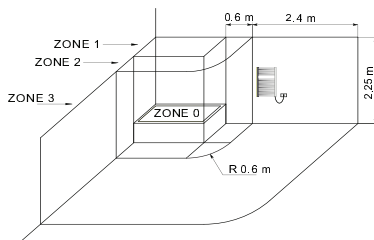


The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric towel rail must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.

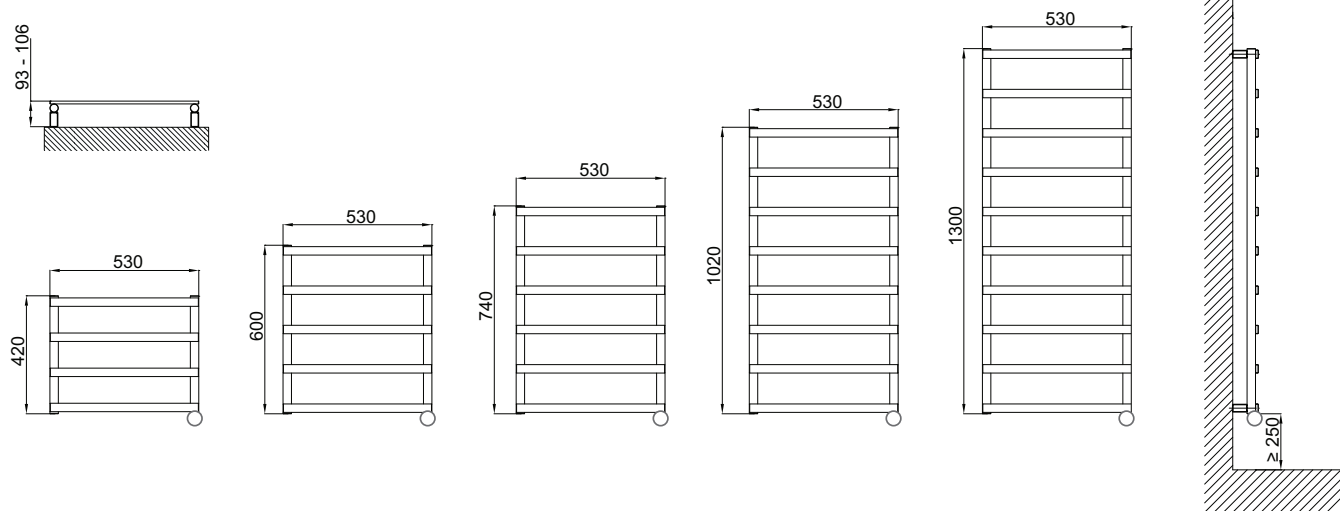

MANUAL ON/OFF




The general footprint has to be calculated considering the resistance cap height

ALESSANDRA ELECTRIC - POLISHED STAINLESS STEEL

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
420	530	3581680400001	150	3,3
600	530	3581680400002	150	4,4
740	530	3581680400003	150	5,0
1020	530	3581680400004	150	5,9
1300	530	3581680400005	150	6,7

NEW

SIMPLE HEATER WITH CABLE COVER



The general footprint has to be calculated considering the resistance cap height

ALESSANDRA ELECTRIC - POLISHED STAINLESS STEEL (SIMPLE HEATER WITH CABLE COVER)

Height [mm]	WIDTH L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
420	530	3581680400011	150	3,3
600	530	3581680400012	150	4,4
740	530	3581680400013	150	5,0
1020	530	3581680400014	150	5,9
1300	530	3581680400015	150	6,7