

CORDIVARI

DESIGN


CATALOGUE
NR. 7

D E S I G N RADIATORS

CORDIVARI
DESIGN

Designed | Engineered | Made
IN ITALY

for the best
SHOWROOM

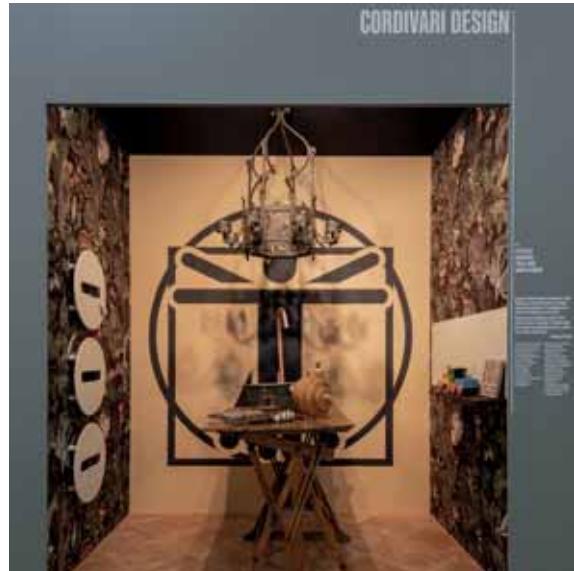




Cordivari Design is the brand that identifies the artistic, research and development path of Cordivari group.

This concept explores the sphere of emotions and affectivity: a journey of passion and feelings that are reflected in the living space where every object, every element is expression of its personality. Cordivari Design radiators become in this way protagonists of the contemporary living. The continuous research for technological solutions to enhance the efficiency of the radiators combined with the creativity of important designers working for Cordivari Design, create a perfect alchemy between functionality and style, able to give warmth and elegance to every living space.

THE COMPANY

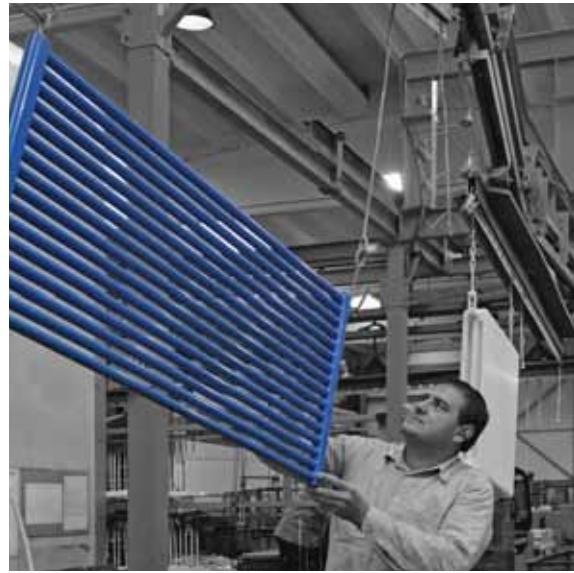


Cordivari company is among the most important manufacturers of towel rails and radiators.

The orientation towards technological innovation and the use of state-of-the-art production processes make Cordivari a leader in the excellence of Made in Italy.

Thanks to robotised production processes and to a quality management system covering 100% of the production, Cordivari Design brand is today a synonym of elegance, comfort and innovation worldwide.

All production processes, cutting and metal working, welding, painting and quality tests are performed within Cordivari plants.

THE FACTORY

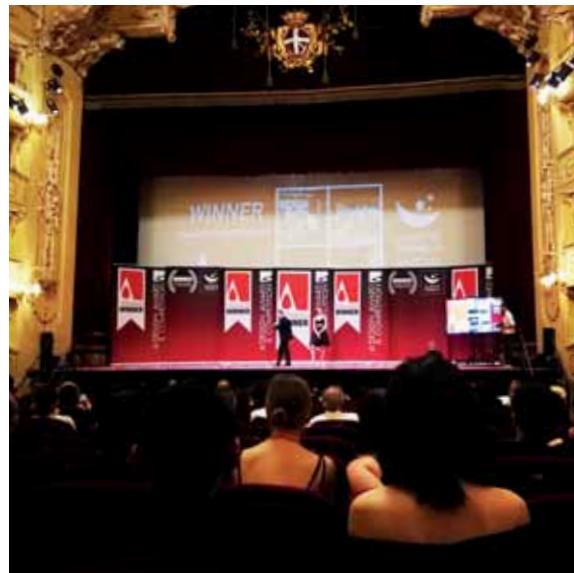



- Compact Solar Thermal System Stratos 4S, My Way and Sofi HC win German Design Award 2020
- Window radiators wins IF Design Award 2020

- Hand obtains the special mention at the German Design Award 2018
- The My Way® System is selected for the "Percorso efficienza & Innovazione" during the exhibition Mostra Convengo Expocomfort
- Andrea wins the German Design Award 2018
- Yara and E.Sign win the Iconic Award 2018 - Innovative Interior
- The My Way System wins the A-Design Award
- ADI Design Index for My Way wireless and electronic thermostatic heads
- Lynea accessories win the Archiproducts Design Award 2018

- Nomination of the Sfere at German Design Award 2017 - Excellent Product Design from German Design Council

- Giuly® won IF - Product Design Award

- Blow® won Reddot Design Award Best of the Best category heating radiator

- Blow® launched from designer Jean-Marie Massaud during CERSAIE exhibition at Cordivari Design stand
- Jungle® e Badge® exposed in spectacular Mucsarnok Art Gallery, Budapest
- Movie®, Lola Decor and Badge® in three-dimensional version during the event Showroom Stereo 3D, Milan
- Badge® won Łazienka Award, Poland
- Rosy Picture® won the selection of Bathroom of Dreams, Czech Republic

- Badge® won Comfort & Design Award, Milan; Movie® and Hand® radiators selected for Comfort & Design Award, Milan
- Nomination of Badge® for the Idéo Bain Prix du Design award, Paris
- Badge® arrived in Brazil: exhibition at the Museum Mube
- Rio® design Paola Pinnavaia, protagonist of D come design Award (concept Luisa Bocchietto), Torino World Design Capital '08
- Exhibition of the Badge® at Domestic Campus (concept Simone Micheli), Abitare il Tempo - Verona
- Lola awarded the Gold Villa Award, Poland

- The Cordivari Design brand is born, as an identification of high-end furnishing radiators
- First concept of ExtraSlim. Movie is exhibited in preview at the Mostra Convengo Expocomfort of Milan
- ExtraSlim range was created. Badge® was exhibited in the exclusive setting Sim.Home (concept Simone Micheli), Abitare il Tempo - Verona

- Stradivari was selected for the event Casanova Room Number 3 (concept Luca Scacchetti), Abitare il Tempo - Verona
- Tam Tam was selected for I.DOT - Italian Design on Tour award

- First prototyp of Foglia®, first stainless steel radiator with exclusive design (design by Paola Pinnavaia)

- Elen, the first design radiator made in stainless steel, was realized

2021

- Model Tessuto is included in the ADI Design Index 2021 Selection, the first step towards the prestigious Compasso d'Oro 2022.
- Model Tessuto wins the German Design Award GOLD 2022, the highest recognition for one of the most important international awards in the design sector.

2020

- Lynea (design by Marco Pisati), Arianna and E.Sign win the German Design Award 2019
- Compact Solar Thermal System Stratos 4S wins Archiproducts Design Award 2019

2019

- Sfere obtains the special mention at the German Design Award 2017
- Andrea wins the IF Design Award, conferred by the International Forum of Design
- The Lynea accessories (design by Marco Pisati) win the Red Dot Design Award in the product Design category
- Arianna wins the Archiproducts Design Awards

2018

- Sfere won ADI Ceramic Award of the ADI Associazione per il Disegno Industriale

2017

- Nomination by German Design Council of Blow® at the German Design Award

2016

- Badge® exposed in Jo House event (AbitaMi) during Salone Internazionale della Casa - MACEF, Milano
- Bridge® and Raising® exposed at Open Art Office (concept Mariano Moroni), sponsored by A.M.A.C.I. (Italian Association of Contemporary Art Museum)

2015

- Badge® goes to Mexico: La Casa Italiana in Messico (concept Simone Micheli), Museo de Guadalajara, Mexico
- Cordivari protagonist of Fuorisalone Interni Design Energies, Milan

2014

- Badge® protagonist of the exhibition SiMaison (concept Simone Micheli), Salon Futur Intérieur - Paris
- Badge® won Design Plus, Frankfurt

2009

- Stradivari at Fuorisalone Texture & Materials (concept Carlo Colombo), Superstudioipù - Milan

2006

- Collezione Inox range was created. Foglia® won the I.D. Magazine Annual Design Review award, New York

2004

- Elen protagonist of Cersaie exhibition - Bologna

1999

- The Claudia® Cordivari radiator is born

1995

Awards and prizes received during the years from Cordivari radiators - milestones in a continuous synergy between functionality and style.

1991

1989



DESIGN HISTORY



Jean-Marie Massaud

Graduated from the ENSCI in 1990, Jean-Marie Massaud has run a research for synthesis, reduction and lightness since his first activities. He has been working in all kind of design fields, from furniture to industrial product and equipment. In 2000, he founds Studio Massaud and expands his expertise to architecture and brand development.

He collaborates with various brands such as B&B Italia, Axor Hansgrohe, Dedon, Lancôme or Renault. Denying trend and fashion, Jean-Marie prefers questioning the existing, working out on progress and eventually proposing answers to contemporary challenges. It is this symbiosis between Man, his creations and his natural environment, that Jean Marie Massaud strives to reach, as a catalyst to innovation, as an economic model and as a life project. For Cordivari he projected Blow® radiator's design.

Simone Micheli

Professor at University , he founded in 1990 Architecture Studio and in 1993 the Project Company «Simone Micheli Architectural Hero» His architectural jobs, contract, interior design, exhibit, graphic and communication are linked to sensorial world.

He takes care of the most important exhibiting event and most qualified international Fair.

His artworks are shown at the most important architectural and design Show all over the world. Many magazine are writing about his job.

He created Badge® and Sfere radiators for Cordivari, have been awarded with Design Plus, with Comfort & Design and have been nomination at Ideo Bain Award, Ceramics Design Award, German Design Award Special Mention and Archiproducts Design Award - Best of Category.



Mariano Moroni

Architect, Artist and Designer. He was born in 1954 in Nereto (Teramo). After Artistic High School he graduated in architecture, and was licensed by Politecnico in Milan . Starting from 70s he attended many Exhibitions and Fairs in Italy and abroad. He has a wide-ranging and versatile mind, and he is involved in many creative activities from painting to architecture, from urban activity to graphic and design.

In 1999 he took part to a movie whose theme was rural architecture. His artworks are shown in public and private structures.

Cooperating with Cordivari, with mutual respect and estimation, he created Movie®, Renée, Jungle®, Raising®, Bridge®, Roads®, Roads® STF, Groove® and Giuly®.

Movie® wins the selection for the Comfort & Design award.

Giuly® wins the IF - Product Design Award of the International Forum Design in Hanover.





Paola Pinnavaia

Paola Pinnavaia graduated at ISIA in Rome and won the European Design Award.

She worked as industrial designer for Texas Instruments in Nice, Tokyo and Dallas. In 1994 she founded Studio ONdesign in Rome, putting at industries disposal her creativity, innovation, and methodological experiences she made Design being the propulsive heart of the industry.

She cooperated with many prestigious international companies.

She designed for Cordivari Rio® and Foglia® (winner of 2001 I.D. Award review Magazine, New York).



Luca Scacchetti

Luca Scacchetti (Milan 1952 - 2015).

In 1975 he graduated in Architecture at Milan Politecnico University. Since 1976 he's teaching Architectonic Composition and since 1987 he's teaching Architectonic Projects at Architecture Department - European Design Institute in Milan.

He is also teaching Architectural elements and Urbanistic at Artistic Accademy in Brera and at Design Department - Politecnico in Milan. He is cooperating in Design with many important Italian and international furnitures lighting and gifts industries.

For Cordivari he created Stradivari radiator.

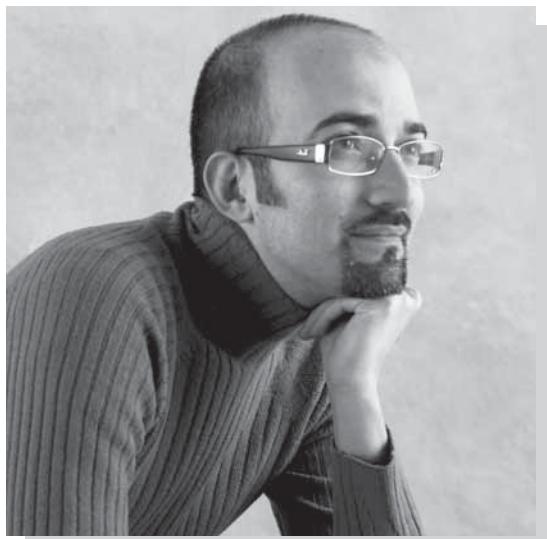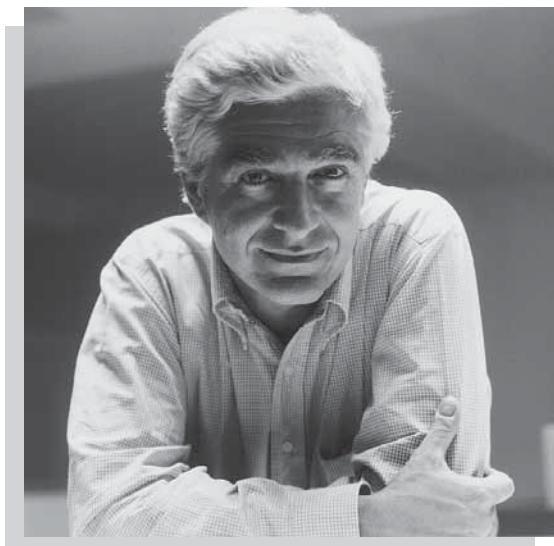


Marco Pisati

Designer, fascinated by new materials and new technologies, tests his ideas in the most extreme sectors: starting from the aerospace, designing interiors bound to the concept of space habitability in absence of gravity for the ASI (Italian Space Agency), reaching the earth's nomadic one, realizing the first example of interactive nomadic office (Motorhome Aci).

Invited to expose his works at Leopolda Exposition in Florence ("Deep Inside"-Image) he presented with the company Grado Zero Espace, leading brand in the aerospace textile branch, a prototype of a jacket for astronauts in Diaplex (a tissue with a memory of shapes). He won the Special Mention in the 2017 German Design Awards in the Category Bath and Wellness with the "Color" product designed for Gattoni Rubinetteria.

At the end of 2020 the new Tessuto® radiator is presented, his new project created for Cordivari Design, which immediately distinguishes itself, for its technical and design contents and for the innovative solutions which makes it a product capable of enhancing the best projects of interior architecture.

DESIGNERS

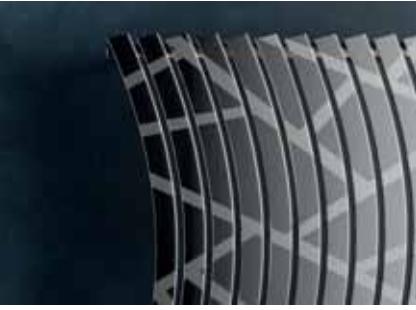

INOX STYLE

Strong of half a century of experience, the company, has embraced the philosophy of stainless steel, making it available to Cordivari design.

In 1991 the first radiator made in stainless steel, model Elen, was created. Stainless steel is conquering every day larger and larger application in architecture and industrial design, not only thanks to its performances, but mainly for its visual lightness. The light reflection created by the polished stainless steel Cordivari design radiators, or the elegance of the satin finishing, guarantees a touch of exclusivity and prestige to your house.

Stainless steel is a 100% recyclable material, resistant to corrosion, non-toxic and with infinite lifetime.



EXTRASLIM®

Cordivari design offers a new concept of decorative radiator and with the support of important designers, creates the innovative "extraslim" range, a revolution of the design radiator world, thanks to a unique and state of the art production technology.

The result is a radiator consisting of a single heating body with an ultra-thin thickness, totally different from the traditional market offer, with geometries that go well beyond the traditional image of the radiator. The extraslim range, has been awarded with several international awards: Design Plus, Comfort & Design, Łazienka Award and Prix du Design ideobain nomination.



NEO DESIGN

Neo design radiators are involved in the artistic trend of "minimalism" that has greatly influenced contemporary design. Purity, simplicity of lines and architectural forms, are the elements that will make you appreciate these sober and elegant radiators.

Interior furnishing designed to create a perfect synthesis between aesthetics and functionality, enables great thermal efficiency in line with current standards of energy saving.

The neo design with its unique style becomes protagonist of contemporary living.



CLASSIC LINE

Retrò is the new line of Cordivari radiators, inspired by classical forms and elegant design.

With timeless shapes these decorative radiators are available with shiny and bright finishing to decorate your bathrooms with the most exclusive taste.

The Retrò line is available in 3 models with 3 different finishes: chrome, antique bronze, antique Gold.



GRAPHIC PICTURE

Heat and colour. The picture radiators spreading the heating through beautiful colours and images, become the canvas of a painter or a frame upon which the most exciting impressions of your life are captured.

An innovative and everlasting painting process, internationnaly awarded, with high quality finishing and environment friendly approach. The radiator becomes a design object, an element that personalizes your living environment, making it a unique item, enriched by chromatic effects you can choose between graphic solutions proposed by Cordivari design, created by painters, artists, designers or by yourself with your favourite image, which will capture forever on the radiator your desired image.



ACCESSORIES | TECHNICAL SUPPORT

A big range of colours and accessories completes our radiators offer: valves, towel rails, hooks polished, satin or painted to put an extra focus on the Cordivari Design. An expansion of knowledge of Cordivari's Design going from international rewards to events, from presentation of designers who signed Cordivari's Design Line up to the models that became beauty icons and state of the art projects.

A true support for all professionals for thermal output calculation, valves, electrical resistance, system and product certifications.



LOLA®
stainless steel
BLOW®
stainless steel
RIO®
stainless steel
STRADIVARI
stainless steel
KELLY 18
stainless steel



16 **196**
28 **208**
32 **210**
36 **214**
40 **218**

KELLY 18 ELECTRIC
stainless steel

42 **220**
44 **222**
48 **226**
54 **232**
60 **236**



SFERE
GIULY®
GIULY® SL
BADGE®
BADGE® ELECTRIC

64 **238**
70 **242**
76 **246**
80 **248**



KELLY 38
stainless steel
BABYLA
stainless steel
CELINE | CELINE ELECTRIC
stainless steel
FUJKO
stainless steel

44 **222**
48 **226**
54 **232**
60 **236**



TESSUTO®
FRAME
FRAME MAX
FRAME LYNEA
FRAME ELECTRIC
FRAME BLOWER | BLOWER DUAL ENERGY
ANDREA
ANDREA ELECTRIC

102 **262**
112 **268**
126 **290**
136 **294**
146 **306**

HAND®
HAND® ELECTRIC
E.SIGN
MOVIE®
MOVIE® ELECTRIC
JUNGLE®

82 **250**
86 **254**
90 **256**
94 **260**



RETRÒ I - II - III

168 **324**




JACKY
JACKY ELECTRIC
YARA
DEBBY
GROOVE®
ROADS®
ROADS® STF

152 **310**
156 **314**
158 **316**
160 **318**
162 **320**



FRAME TRENDS
MACRO NATURAL - MATERIA
ETEREO - POP MEMORY
FRAME PICTURE
STANDARD - CORALLO - ARTIC
AGOON AZUL - IRIS 03 - SEASON
CONVIVIUM

178 **334**
180 **344**

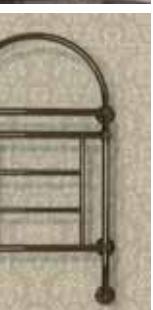

RETRÒ I - II - III ELECTRIC

174 **326**



ROSY GRAPHIC

TOTEM WHITE - TOTEM BLACK - RING
URBAN WHITE - URBAN BLCK

188 **356**

Valves and accessories

366

Heritage Collection

386

Colours

388

Certificates

390

Sales conditions and warranty

392

Alphabetical index

394

SUMMARY

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT



42 **220**
44 **222**
48 **226**
54 **232**
60 **236**



**LOLA | BLOW | RIO | STRADIVARI
FUJIKO | KELLY 18 | KELLY 38 | BABYLA
CELINE | KELLY 18 © | CELINE ©**

Strong of half a century of experience, the company, has embraced the philosophy of stainless steel, making it available to Cordivari design.

In 1991 the first radiator made in stainless steel, model Elen, was created. Stainless steel is conquering every day larger and larger application in architecture and industrial design, not only thanks to its performances, but mainly for its visual lightness. The light reflection created by the polished stainless steel Cordivari design radiators, or the elegance of the satin finishing, guarantees a touch of exclusivity and prestige to your house.

Stainless steel is a 100% recyclable material, resistant to corrosion, non-toxic and with infinite lifetime.


INOX STYLE

INOX STYLE



Lola[®]

satin stainless steel

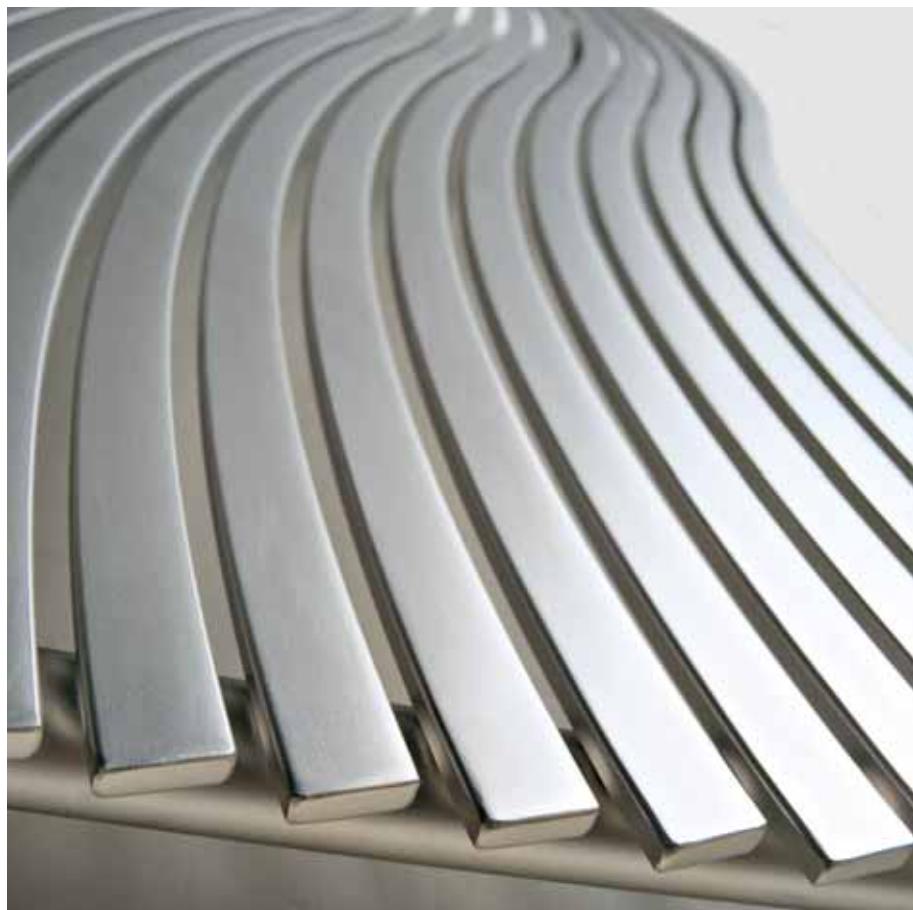

GOLD VILLA
AWARD

3D
TRADEMARK

IN PICTURE ON THE LEFT

model: horizontal
L: 1516 mm - H: 450 mm
material: satin stainless steel
watt 549
accessories: elegant manual square satin valve
technical data page 196

Lola[®]

polished stainless steel

Comfort and relax shaped into Lola radiator.

Sinuous and surrounding design, proposed in polished, satin and décor finishing.

Entirely made in stainless steel Lola[®] will catch your eyes with the reflection of light rolling on the waves of its radiants and creating a unique and comfortable atmosphere in both classical and modern ambient.

GOLD VILLA
AWARD


3D
TRADEMARK

IN THE PICTURE ON THE RIGHT

model: vertical
H: 1516 mm - L: 450 mm
material: polished stainless steel
watt 507
technical data page 204



INOX STYLE

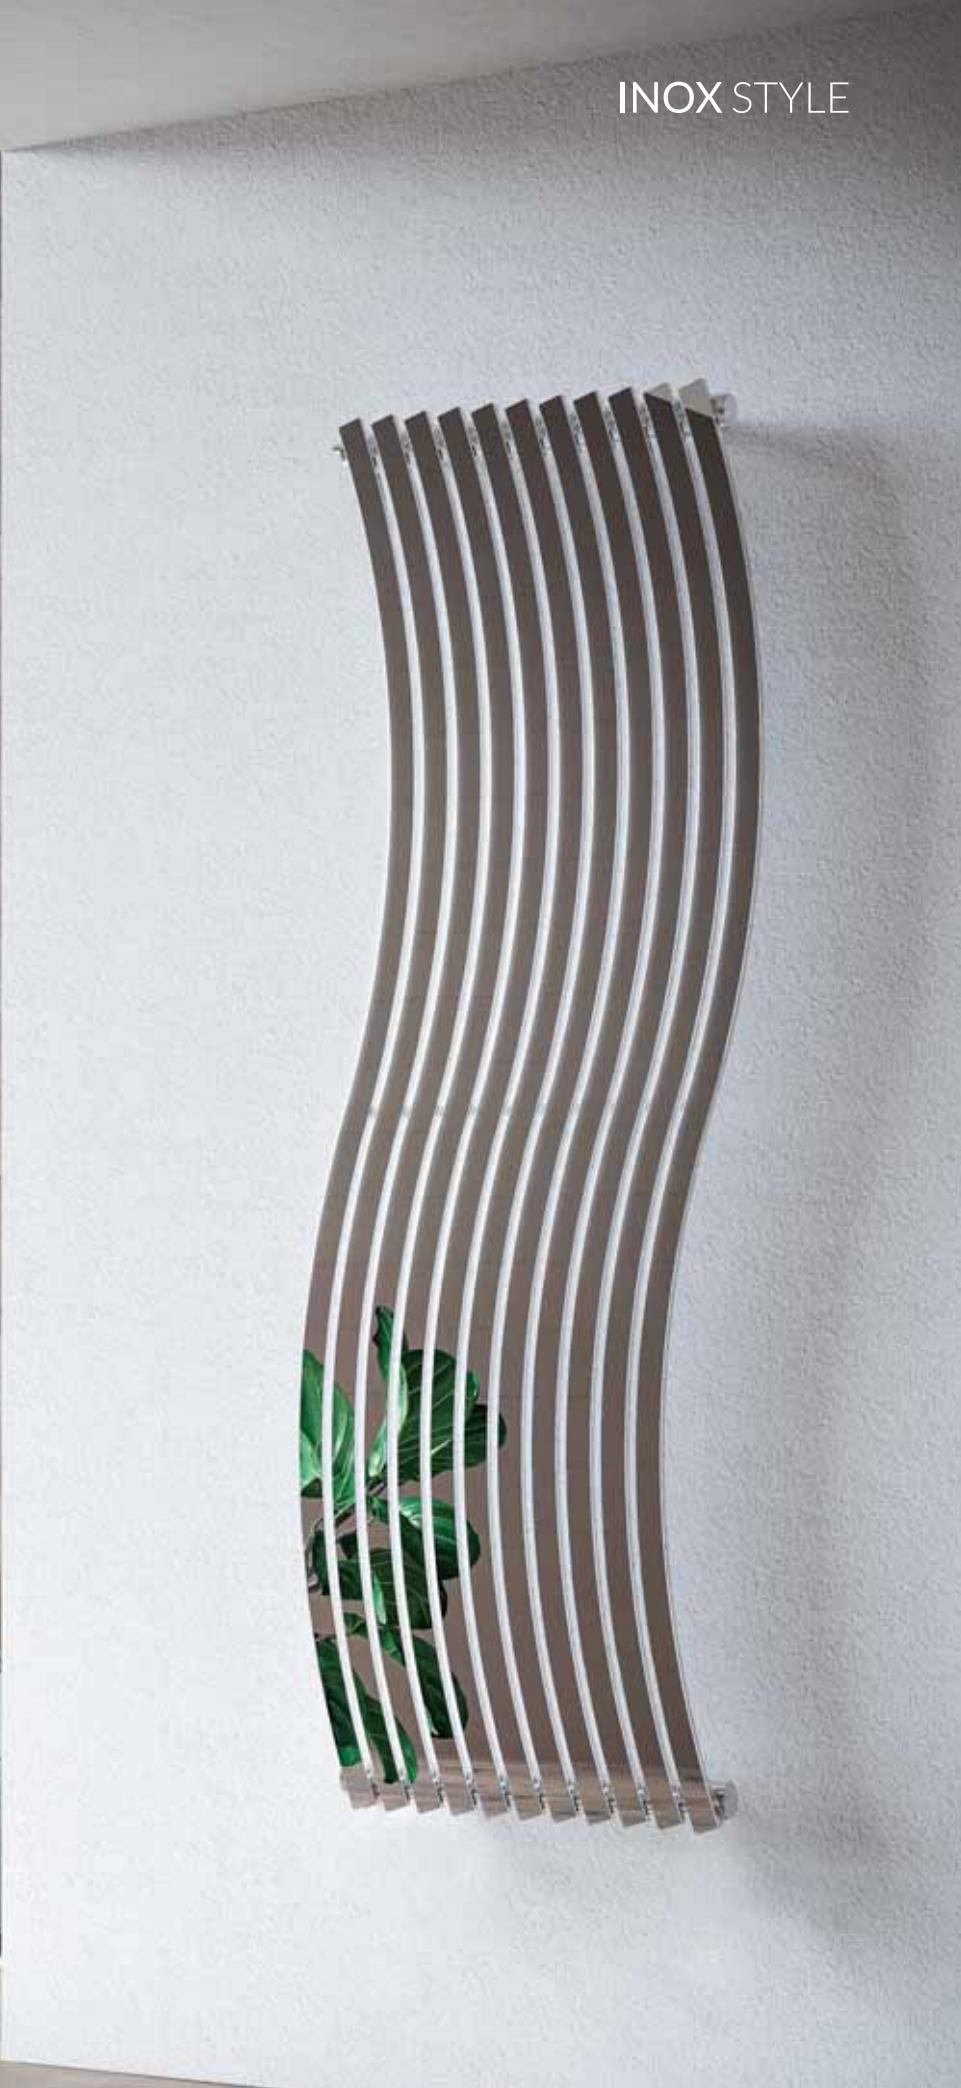

INOX STYLE



Lola[®]

polished stainless steel



GOLD VILLA
AWARD

3D
TRADEMARK

IN PICTURE ON THE LEFT

model: vertical
H: 1516 mm - L: 570 mm
material: polished stainless steel
watt 645
accessories: manual square polished elegant valve
technical data page 204



GOLD VILLA
AWARD

3D
TRADEMARK

Lola®
polished stainless steel

IN PICTURE

model: horizontal
L: 1516 mm - H: 570 mm
material: polished stainless steel
watt 645
accessories: elegant reverse manual polished valve kit
technical data page 198

INOX STYLE




INOXSTYLE



Lola[®] Decor X03

polished and satin stainless steel

artwork Mariano Moroni

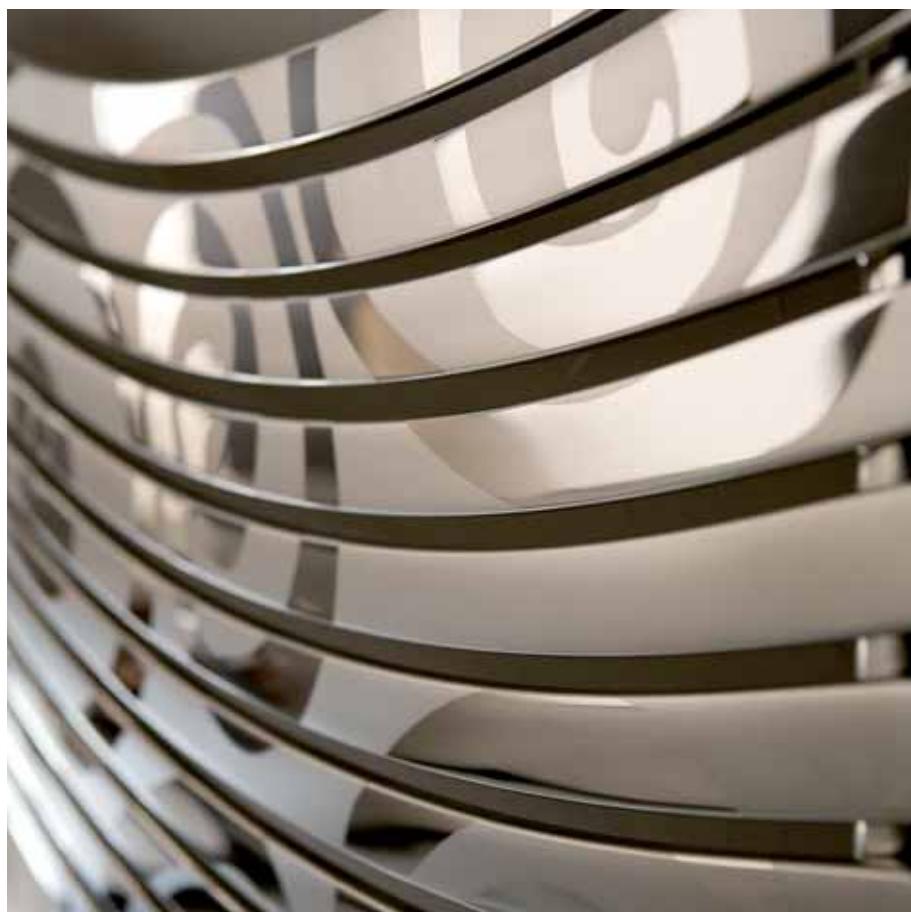

GOLD VILLA
AWARD

3D
TRADEMARK

IN PICTURE ON THE LEFT

model: horizontal
L: 1516 mm - H: 450 mm
material: polished and satin stainless steel
watt 507
accessories: elegant reverse manual polished valve kit
technical data page 200

NEW

Lola[®] Decor XO4

polished and satin
stainless steel


artwork Mariano Moroni

IN THE PICTURE ON THE RIGHT

model: vertical
L: 450 mm - H: 1516 mm
material: polished and satin stainless steel
watt 507
accessories: manual square polished elegant valve
technical data page 206



INOX STYLE

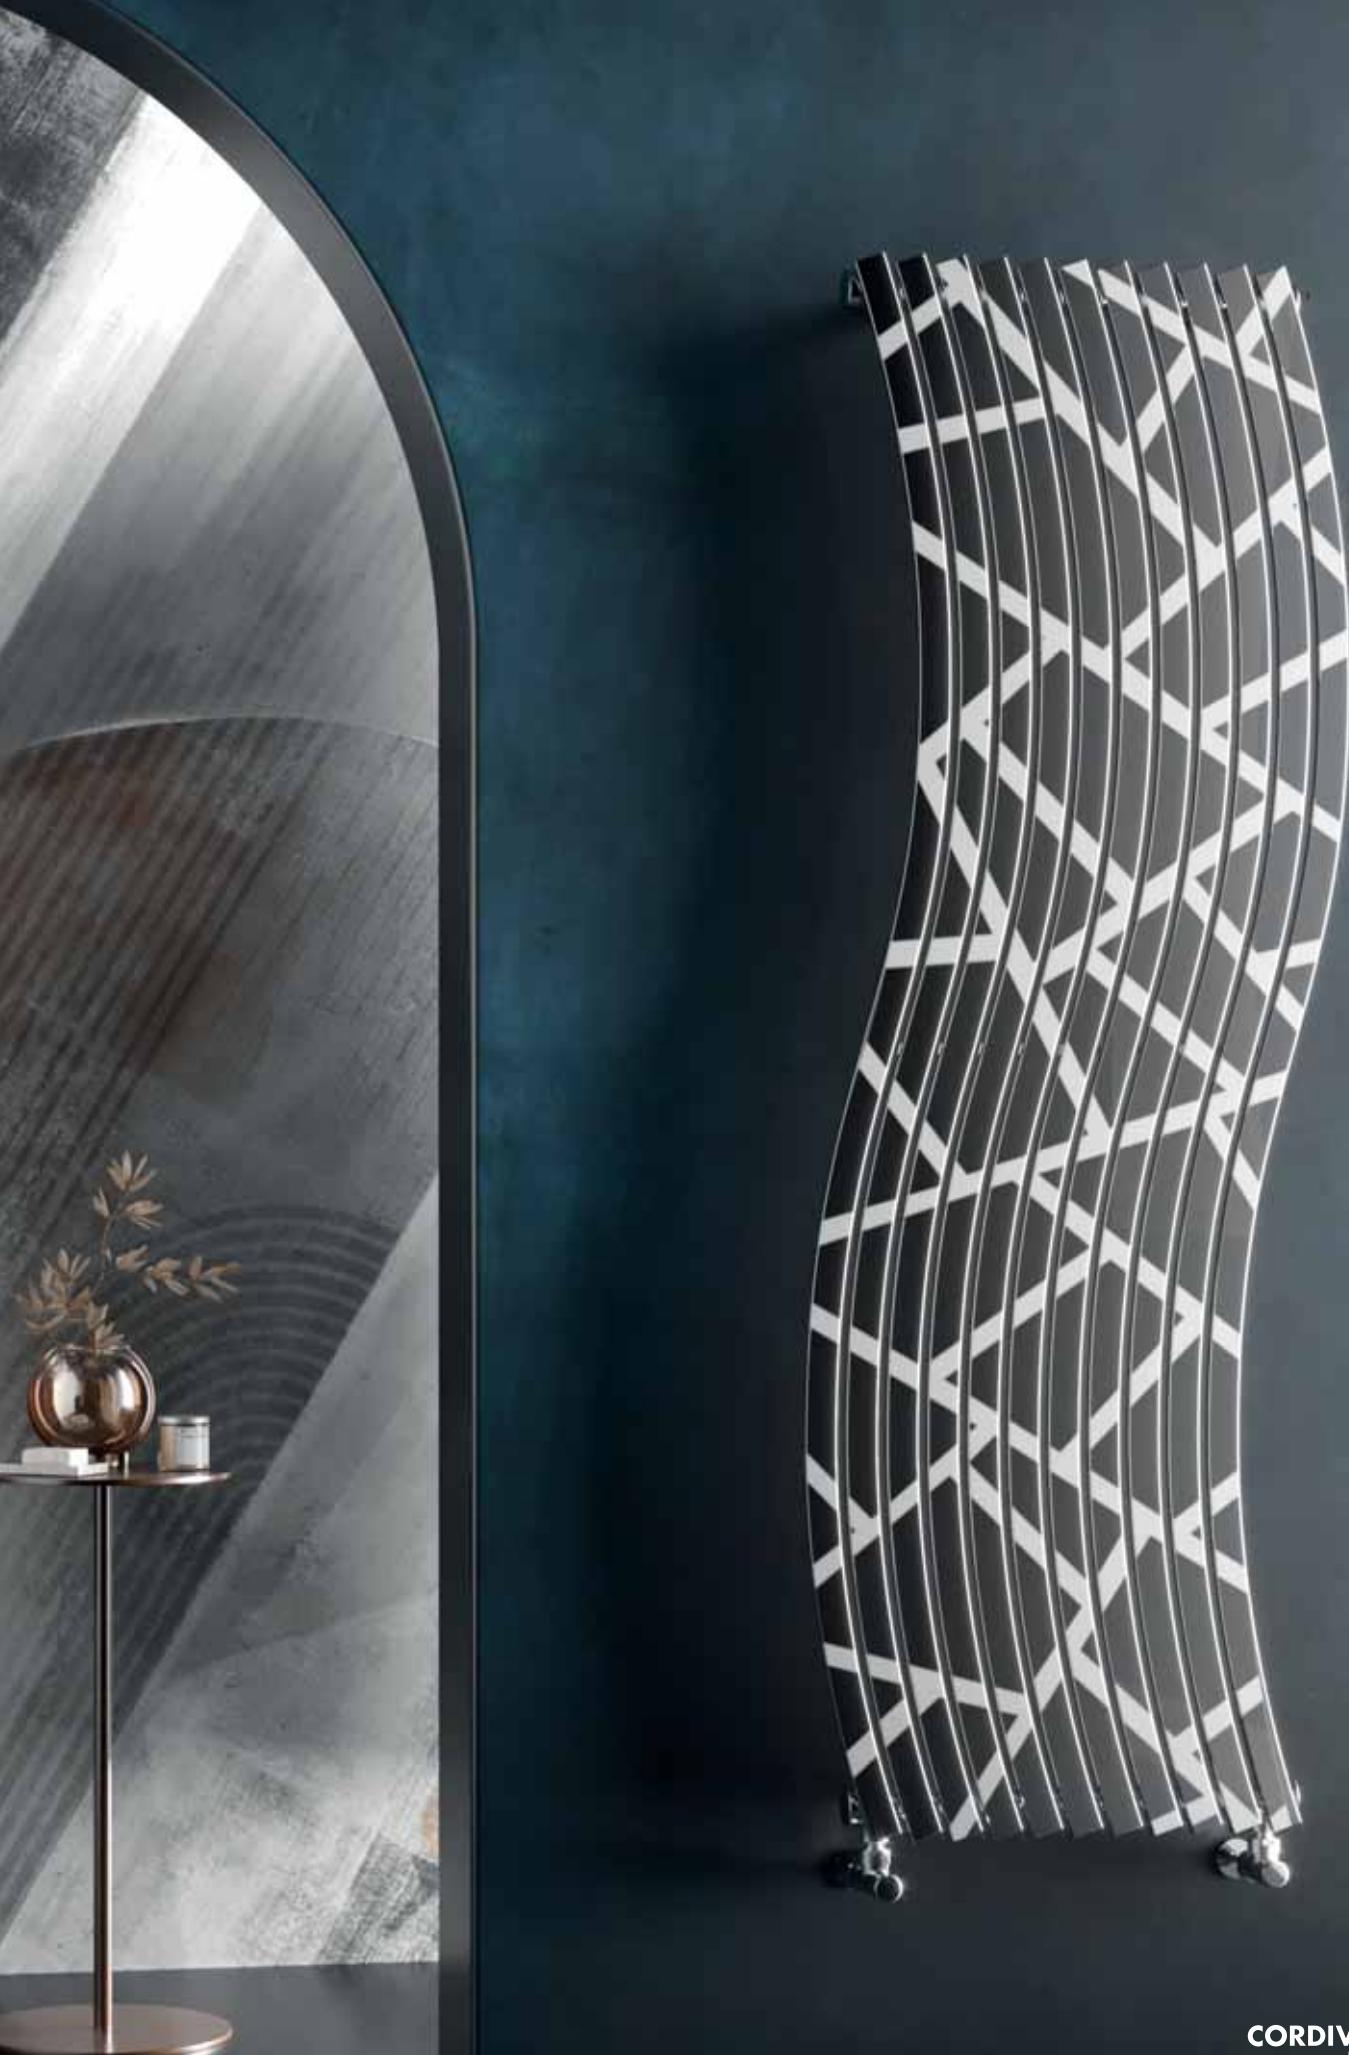


INOX STYLE



Blow®

polished stainless steel

design Jean-Marie Massaud

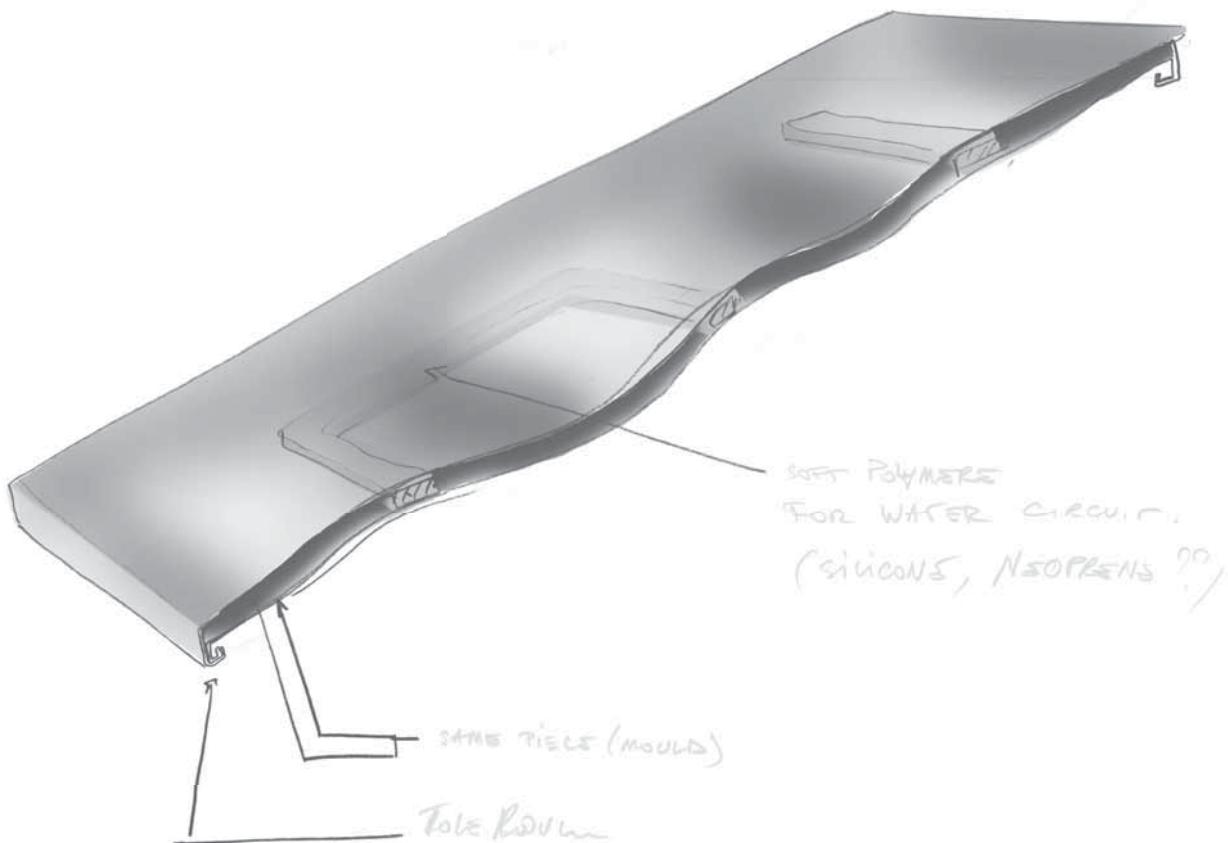

reddot design award
best of the best 2012



German
Design Award
NOMINEE 2014

IN PICTURE ON THE LEFT

model: vertical
L: 500 mm - H: 1700 mm (x2)
material: polished stainless steel
watt 700 (x2)
technical data page 208

Blow®

polished stainless steel

design Jean-Marie Massaud

"We have designed a product that gives architects the opportunity to fulfil their requirements in terms of design.

Blow® is a simple, refined and architectural system, that can easily be arranged and integrated in any interior".

J.M. Massaud



reddot design award
best of the best 2012



German
Design Award
NOMINEE 2014

IN THE PICTURE ON THE RIGHT

model: horizontal
L: 1700 mm - H: 500 mm (x2)
material: polished stainless steel
watt 700 (x2)
technical data page 208





ROTINA
ROTINA
ROTINA
ROTINA



Rio®

satin stainless steel

design Paola Pinnavaia


Rio®, unique piece of art. Available in polished and satin stainless steel, draws its inspiration from nature; its gentle shape reminds a beautiful waterfall. The movements of the radiator give great energy sensations. Design tames the material, it's a thermal sculpture that let you feel true emotions. Sweet curves and harmonic waves of heating elements show a strict relationship between appearance anatomy and logic of the object.



D COME DESIGN

IN THE PICTURE ON THE RIGHT

L: 671 mm - H: 2000 mm
material: satin stainless steel
watt 863
accessories: elegant manual square satin valve
technical data page 210

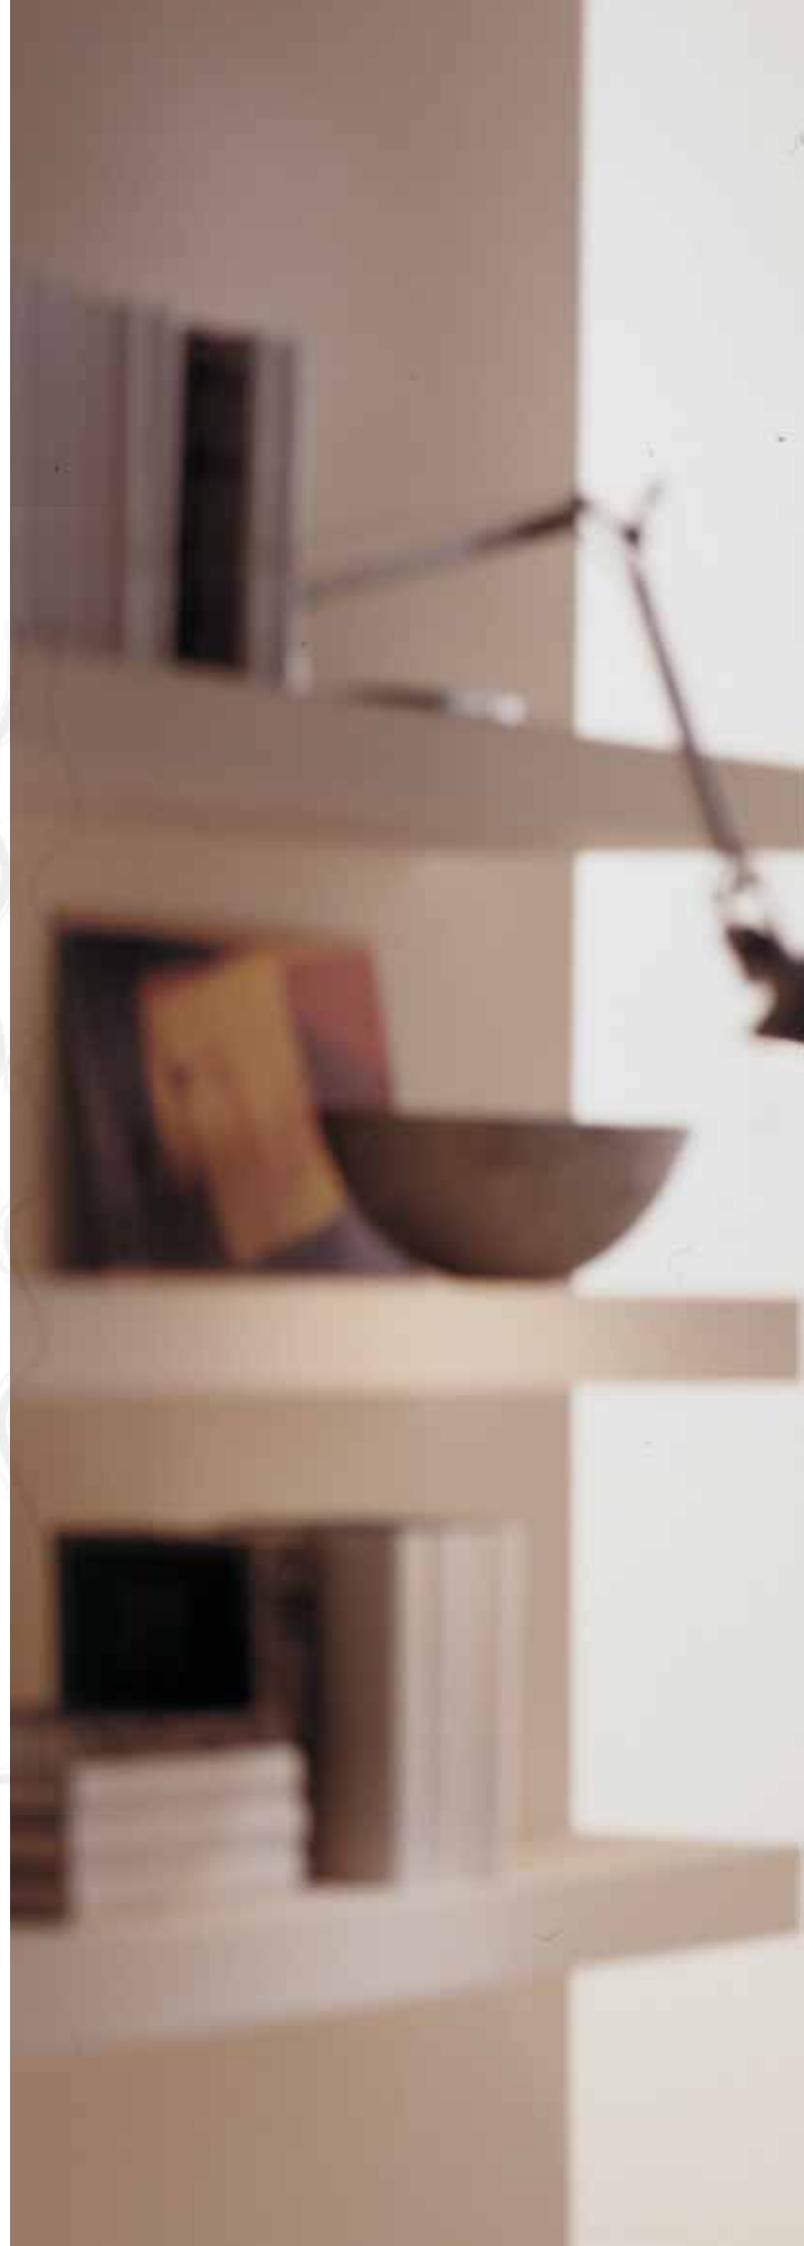

INOX STYLE



INOX STYLE



Rio®

polished stainless steel

design Paola Pinnavaia



D COME DESIGN

IN PICTURE ON THE LEFT

L: 671 mm - H: 2000 mm
material: polished stainless steel
watt 807
accessories: manual square polished elegant valve
technical data page 212

INOX STYLE



Stradivari

satin stainless steel

design Luca Scacchetti



CASANOVA ROOM
NUMBER 3

IN PICTURE ON THE LEFT

model: vertical
L: 660 mm - H: 2100 mm
material: satin stainless steel
watt 1084
technical data page 216



Stradivari
satin stainless steel
design Luca Scacchetti

IN PICTURE

model: horizontal
L: 1600 mm - H: 570 mm (x2)
material: satin stainless steel
watt 656 (x2)
accessories: elegant manual square satin valve
technical data page 214

INOX STYLE




CASANOVA ROOM
NUMBER 3

INOX STYLE



Kelly 18

polished stainless steel

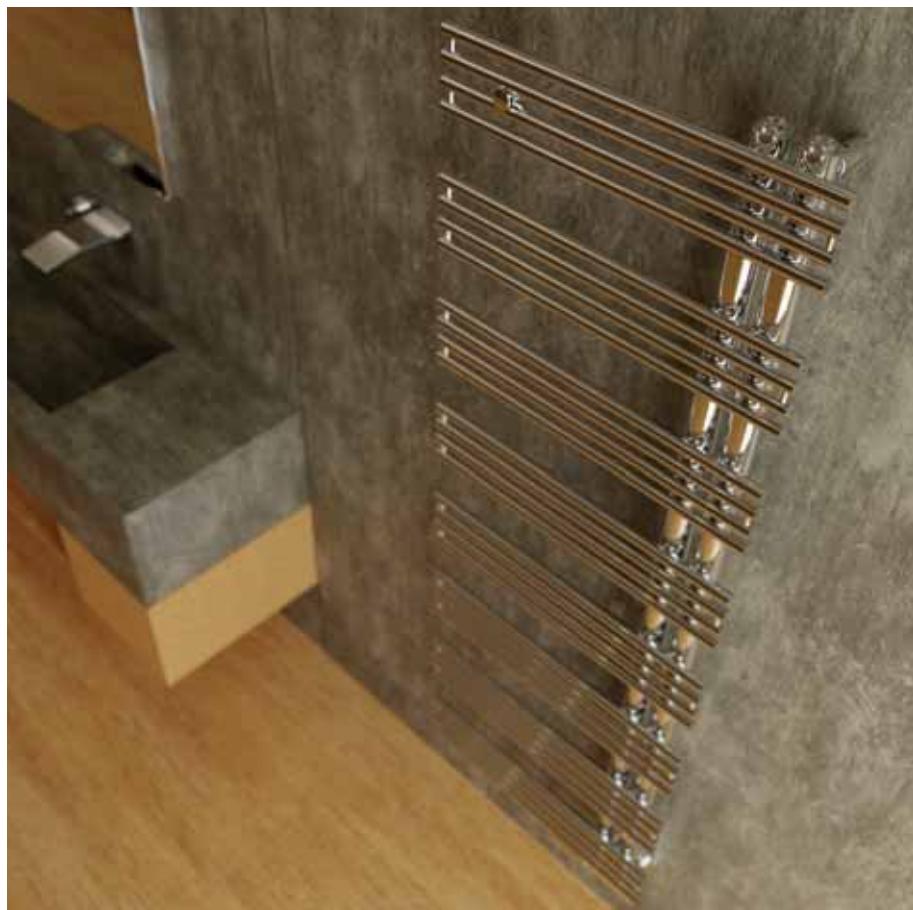

IN PICTURE ON THE LEFT

L: 500 mm - H: 1406 mm

material: polished stainless steel
watt 489

accessories: elegant square polished valve kit pipe centres 50 mm with thermostatic head - right
technical data page 218

Kelly 18

electric

polished stainless steel



IN THE PICTURE ON THE RIGHT

H: 1420 mm - L: 500 mm
material: polished stainless steel
watt 600
top digital thermostat with infrared remote control
technical data page 220





INOX STYLE

NEW



Kelly 38

polished stainless steel



IN PICTURE ON THE LEFT

L: 500 mm - H: 1550 mm

material: polished stainless steel
watt 515

accessories: elegant square polished valve kit pipe centres 50 mm with thermostatic head - right
technical data page 222

NEW

Kelly 38

satin stainless steel

IN THE PICTURE ON THE RIGHT

L: 500 mm - H: 1550 mm
material: satin stainless steel
watt 536
accessories: elegant square satin valve kit pipe
centres 50 mm with thermostatic head - left
technical data page 224





INOX STYLE



Babyla

satin stainless steel

design Mariano Moroni



IN PICTURE ON THE LEFT

L: 600 mm - H: 1080 mm

material: satin stainless steel
watt 250

accessories: elegant square satin valve kit pipe centres 50 mm with thermostatic head - right
technical data page 226

Babyla

polished stainless steel

design Mariano Moroni

Inspired on modern Minimalism. Babyla, is a decorative radiator with simple and elegant lines, which finds its power in the purity of the stainless steel and its simple aesthetical line that represents an eternal decorative element. Completely built in stainless steel, it is available in polished, satin or gold finishing. Babyla can be dressed with practical and useful accessories as shelves, mirror or hooks.

IN THE PICTURE ON THE RIGHT

L: 600 mm - H: 1500 mm
material: polished stainless steel
watt 333
accessories: elegant polished valve with pipe centres 50 mm square
accessories: hook
technical data page 228



INOX STYLE



INOX STYLE



Babyla Gold

polished stainless steel

design Mariano Moroni

IN PICTURE

L: 600 mm - H: 1080 mm


material: polished stainless steel

finish: gold

watt 233

accessories: elegant gold valve with pipe centres 50 mm square right
technical data page 230

INOX STYLE

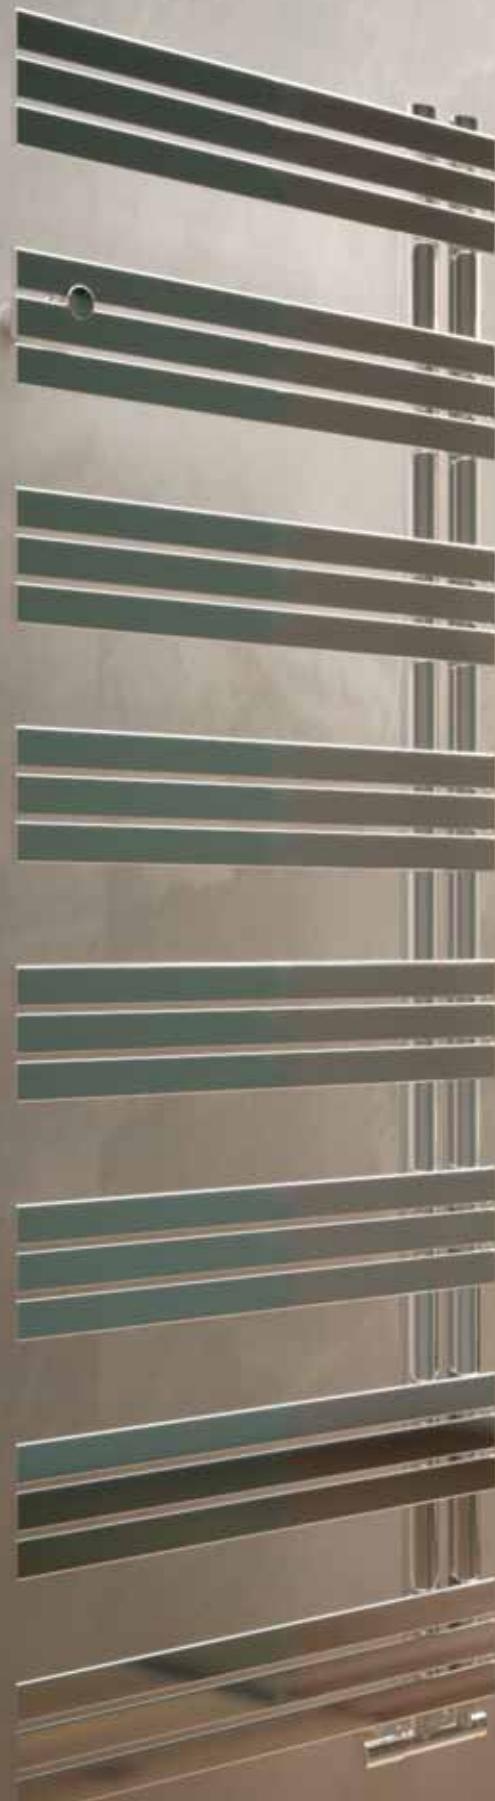

Celine

polished stainless steel



IN PICTURE ON THE LEFT

L: 500 mm - H: 1338 mm

material: polished stainless steel
watt 337

accessories: elegant polished valve with pipe centres 50 mm square left
technical data page 232

INOX STYLE



Celine polished stainless steel

IN PICTURE

L: 500 mm - H: 1338 mm

material: polished stainless steel
watt 337

accessories: Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right
technical data page 232



Celine electric

polished stainless steel



IN THE PICTURE ON THE RIGHT

L: 500 mm - H: 1618 mm
material: polished stainless steel
watt 500
top digital thermostat with infrared remote control
technical data page 234





Fujiko

polished stainless steel

The new stainless steel-made Fujiko radiator designed to enrich any restroom giving it warmth and elegance. Bringing to a higher level the daily use of a classical towel rail.



IN THE PICTURE ON THE RIGHT

model: horizontal
L: 1400 mm - H: 595 mm
material: polished stainless steel
watt 554
accessories: manual square polished elegant valve
technical data page 236

INOX STYLE





SFERE | GIULY | BADGE | HAND | E.SIGN
MOVIE | JUNGLE
BADGE © | HAND © | MOVIE ©

Cordivari design offers a new concept of decorative radiator and with the support of important designers, creates the innovative "extraslim" range, a revolution of the design radiator world thanks to a unique and state of the art production technology.

The result is a radiator consisting of a single heating body with an ultra-thin thickness, totally different from the traditional market offer, with geometries that go well beyond the traditional image of the radiator. The extraslim range, has been awarded with several international awards: IF Design Award, Design Plus, German Design Award, Premio Comfort & Design, Premio Łazienka, Prix du Design Ideobain Nominé, Iconic Award and German Design Award.

EXTRASLIM®



Sfere trittico

design **Simone Micheli**



GERMAN
DESIGN
AWARD
SPECIAL
2017



IN PICTURE ON THE LEFT

model: trittico
diameter: 496 mm
material: painted carbon steel
colour: T15 tela
watt 582
technical data page 238

Sfere

design Simone Micheli



MILANO DESIGN WEEK
DIFFERENT SUITES X DIFFERENT PEOPLE
SIMONE MICHELI @ CORDIVARI DESIGN



IN THE PICTURE ON THE RIGHT

diameter: 496 mm
material: painted carbon steel
colour: F27 moonshine
watt 194
technical data page 240





"This concept interrupts frames and stereotypes that characterized decorative radiators. With powerful but non presumptuous, fresh shapes it allows dreaming. Sfere is a continuous ongoing between 2-dimensional and 3-dimensional realities. Suspended in a vacuum this radiator frees itself through most exclusive technologies and designs".

S. Micheli



GERMAN
DESIGN
AWARD
SPECIAL
2017



Sfere

design **Simone Micheli**

IN PICTURE

diameter: 496 mm (x3)
material: painted carbon steel
colour: T12 matt light grey
watt 194 (x3)
technical data page 238





Giuly®

design Mariano Moroni



IN PICTURE ON THE LEFT

L: 520 mm - H: 1590 mm
material: painted carbon steel
colour: F43 Grey Antracite
watt 714
technical data page 242



product
design award
2014



Giuly®

design **Mariano Moroni**

IN PICTURE

L: 520 mm - H: 1200 mm
material: painted carbon steel
colour: R01 pure white
watt 521
technical data page 242



Giuly® sl

design Mariano Moroni



IN THE PICTURE ON THE RIGHT

L: 1590 mm - H: 520 mm
material: painted carbon steel
colour: F25 quartz dust
watt 714
technical data page 244







Badge[®] control

design **Simone Micheli**



DESIGN PL+US
WINNER

COMFORT & DESIGN
AWARD

ŁAZIENKA
AWARD

PRIX DU DESIGN IDÉO BAIN
NOMINÉ

IN PICTURE ON THE LEFT

model: vertical

L: 512 mm - H: 1212 mm

material: painted carbon steel

colour: F34 red sand

watt 567

accessories: Towel bar in polished stainless steel (IN THE UPPER PICTURE)

technical data page 246

DESIGN PLUS

WINNER

COMFORT & DESIGN
AWARD

ŁAZIENKA
AWARD

PRIX DU DESIGN IDÉO BAIN
NOMINÉ

Badge® control

design **Simone Micheli**

IN PICTURE

model: horizontal
L: 1604 mm - H: 404 mm
colour: R01 pure white
watt 572
technical data page 246



DESIGN PL+US
WINNER

COMFORT & DESIGN
AWARD

ŁAZIENKA
AWARD

PRIX DU DESIGN IDÉO BAIN
NOMINÉ



Badge® electric

design Simone Micheli

IN PICTURE

model: vertical

L: 512 mm - H: 1755 mm

material: painted carbon steel

colour: H30 green apple

watt 650

technical data page 248







Hand®



IN PICTURE ON THE LEFT

L: 514 mm - H: 1200 mm
material: painted carbon steel
colour: F15 metal sparkling black
watt 490
technical data page 250



Hand® electric

IN PICTURE

L: 514 mm - H: 1200 mm
material: painted carbon steel
colour: H27 bright red
watt 500
technical data page 252







IN PICTURE

L: 520 mm - H: 1220 mm
material: painted carbon steel
colour: F25 quartz dust
watt 508
technical data page 254

E.Sign control



IN THE UPPER PICTURE

L: 520 mm - H: 1220 mm
material: painted carbon steel
colour: F20 milky
watt 508
technical data page 254



GERMAN
DESIGN
AWARD
WINNER
2019



E.Sign control

IN PICTURE

L: 520 mm - H: 1220 mm
material: painted carbon steel
colour: H27 bright red
watt 508
technical data page 254





Movie®

design Mariano Moroni



COMFORT & DESIGN
NOMINÉ

IN PICTURE ON THE LEFT

L: 642 mm - H: 1392 mm
material: painted carbon steel
colour: F07 silver effect
watt 559
technical data page 256

"The innovative Extraslim® radiator, draws inspiration from cinema as origin of visual communication. It consists of painted carbon steel plate and get over radiators' traditional image to become a friendly object and a symbol of human life".

M. Moroni



COMFORT & DESIGN
NOMINÉ

Movie® electric

design **Mariano Moroni**

IN PICTURE

L: 642 mm - H: 1392 mm
material: painted carbon steel
colour: R18 overseas blue
watt 640
technical data page 258







IN PICTURE

model: vertical

L: 500 mm - H: 1500 mm

material: painted carbon steel

colour: F04 graphite grey


watt 557

technical data page 260



Jungle®

design Mariano Moroni

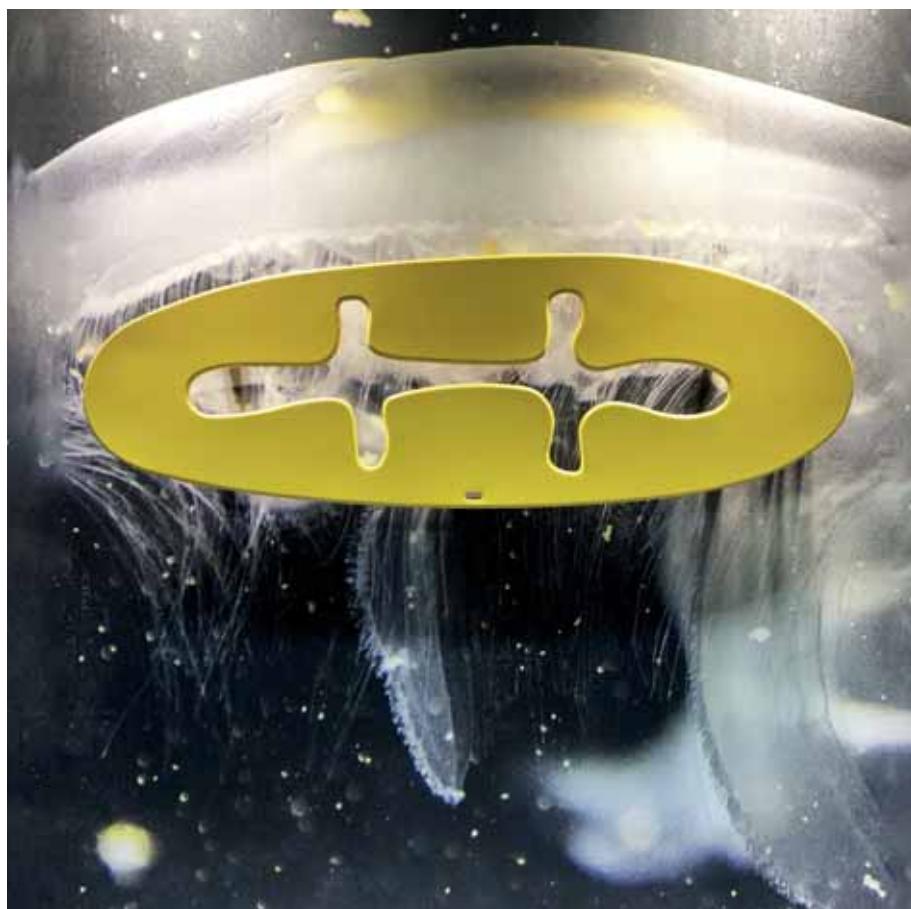

IN THE UPPER PICTURE

model: horizontal
L: 1500 mm - H: 500 mm
material: painted carbon steel
colour: R05 yellow rape
watt 573
technical data page 260






Jungle®

design Mariano Moroni

IN PICTURE

model: horizontal
L: 1500 mm - H: 500 mm
material: painted carbon steel
colour: F22 classic gold
watt 573
technical data page 260

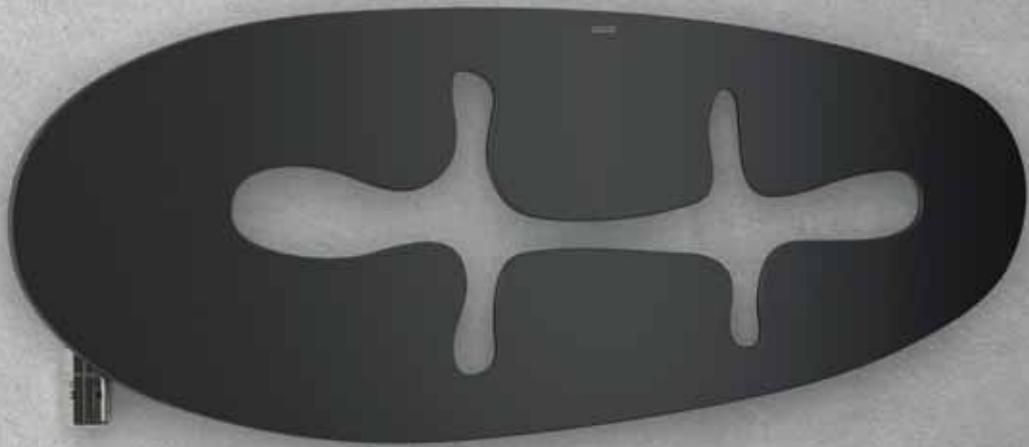

Jungle® control

design Mariano Moroni

IN PICTURE

model horizontal
L: 1500 mm - H: 500 mm
material: painted carbon steel
colour: W02 carbon
watt 573
technical data page 260

Jungle® control

design Mariano Moroni



IN THE UPPER PICTURE

model: vertical
H: 1500 mm - L: 500 mm
material: painted carbon steel
colour: R01 pure white
watt 557
technical data page 260



**TESSUTO | FRAME | FRAME LYNEA
ANDREA | JACKY | YARA | DEBBY
GROOVE | ROADS | ROADS STF
FRAME Ⓛ | FRAME BLOWER Ⓛ
ANDREA Ⓛ | JACKY Ⓛ**

Neodesign radiators are involved in the artistic trend of "minimalism" that has greatly influenced contemporary design. Purity, simplicity of lines and architectural forms, are the elements that will make you appreciate these sober and elegant radiators.

Interior furnishing designed to create a perfect synthesis between aesthetics and functionality, enables great thermal efficiency in line with current standards of energy saving.

The neo design with its unique style becomes protagonists of contemporary living.

NEO DESIGN

NEW

Tessuto[®]

design by **Marco Pisati**

Concept

Tessuto[®] was born from a reflection on the textures of fabrics, from the desire to reproduce the warp of a fabric on the surface of a vertical radiator. The Designer has imagined a series of enlarged metal filaments, put next to each other so to create a dense vertical pattern within a syncopated rhythm that creates an interesting play of lights and shadows. Other rhythms chase each other in an extremely varied image that creates a suggestive play of shadows and reflections.

Personality

Inspired by the screen-printing techniques of contemporary art and intentionally designed with an asymmetrical rhythm, Tessuto[®] can determine infinite rhythms and drawings.

Design flexibility

Tessuto[®] is an aluminum radiator with excellent thermal performances, which offers the possibility of being made in multiple sizes in width and height, allowing Architects great flexibility in planning.

Lightness

The project was developed with a system of minimalist accessories, characterized by a sign that expresses extreme lightness. Shelves and hanging bars integrate perfectly with the design of the radiator, so much to become a "unique" with the product itself. The free coupling system allows you to arrange the accessories along the entire vertical axis.



NEW



Tessuto®

design by **Marco Pisati**



IN PICTURE ON THE LEFT

model: vertical
L: 452 mm - H: 1800 mm
material: aluminium
colour: H56 lavic stone
watt 734
accessories: multifunctional shelf
technical data page 262

Tessuto®

design by **Marco Pisati**



Tessuto® is the new and refined radiator inspired by the beauty of classical art and shaped by the most rigorous lines of contemporary design. Unique and surprising in any environment, it was born to give warmth, comfort and elegance through his ability to be himself in an ever new way.

IN THE PICTURE ON THE RIGHT

model: vertical
L: 452 mm - H: 2200 mm
material: aluminium
colour: S07 Graphite
watt 861
accessories: shelf
technical data page 262



NEW



NEW



Tessuto®

design by **Marco Pisati**



IN PICTURE ON THE LEFT

model: vertical
L: 452 mm - H: 2000 mm
material: aluminium
colour: T10 matt beige
watt 798
accessories: half size shelf right
technical data page 262

NEW



Tessuto®

design by Marco Pisati

IN PICTURE

model: vertical

L: 452 mm - H: 2000 mm

material: aluminium

colour: T01 matt black

watt 798

accessories: side towel bar right / left

technical data page 262



GERMAN
DESIGN
AWARD
GOLD
2022



INOX STYLE



Frame Inox

polished stainless steel



FRAME INOX PLUS

IN PICTURE ON THE LEFT

model: vertical

L: 464 mm - H: 1822 mm

material: polished stainless steel plate
watt 880

accessories: manual square polished elegant valve
technical data page 268





An incomparable design, a journey inside the most beautiful living atmosphere. The new model Frame evidences the purity of the design: Frame polished stainless steel, which produces light effects.

Frame Inox polished stainless steel

IN PICTURE

model: horizontal
L: 2022 mm - H: 576 mm
material: polished stainless steel plate
watt 1222
accessories: manual square polished elegant valve
technical data page 272

INOX STYLE



Frame Inox Decor X03

polished stainless steel | décor satin

artwork Mariano Moroni



FRAME INOX DECOR X03 PLUS

IN PICTURE ON THE LEFT

model: vertical

L: 464 mm - H: 2022 mm

material: polished stainless steel plate with satin décor
watt 978

accessories: manual square polished elegant valve
technical data page 274

NEW


Frame Inox Decor X04

polished stainless steel
décor satin

artwork Mariano Moroni

IN THE PICTURE ON THE RIGHT

model: vertical
L: 464 mm - H: 1822 mm
material: polished stainless steel plate with satin décor
watt 880
accessories: elegant square polished valve kit pipe centres 50 mm
with thermostatic head - right
technical data page 278

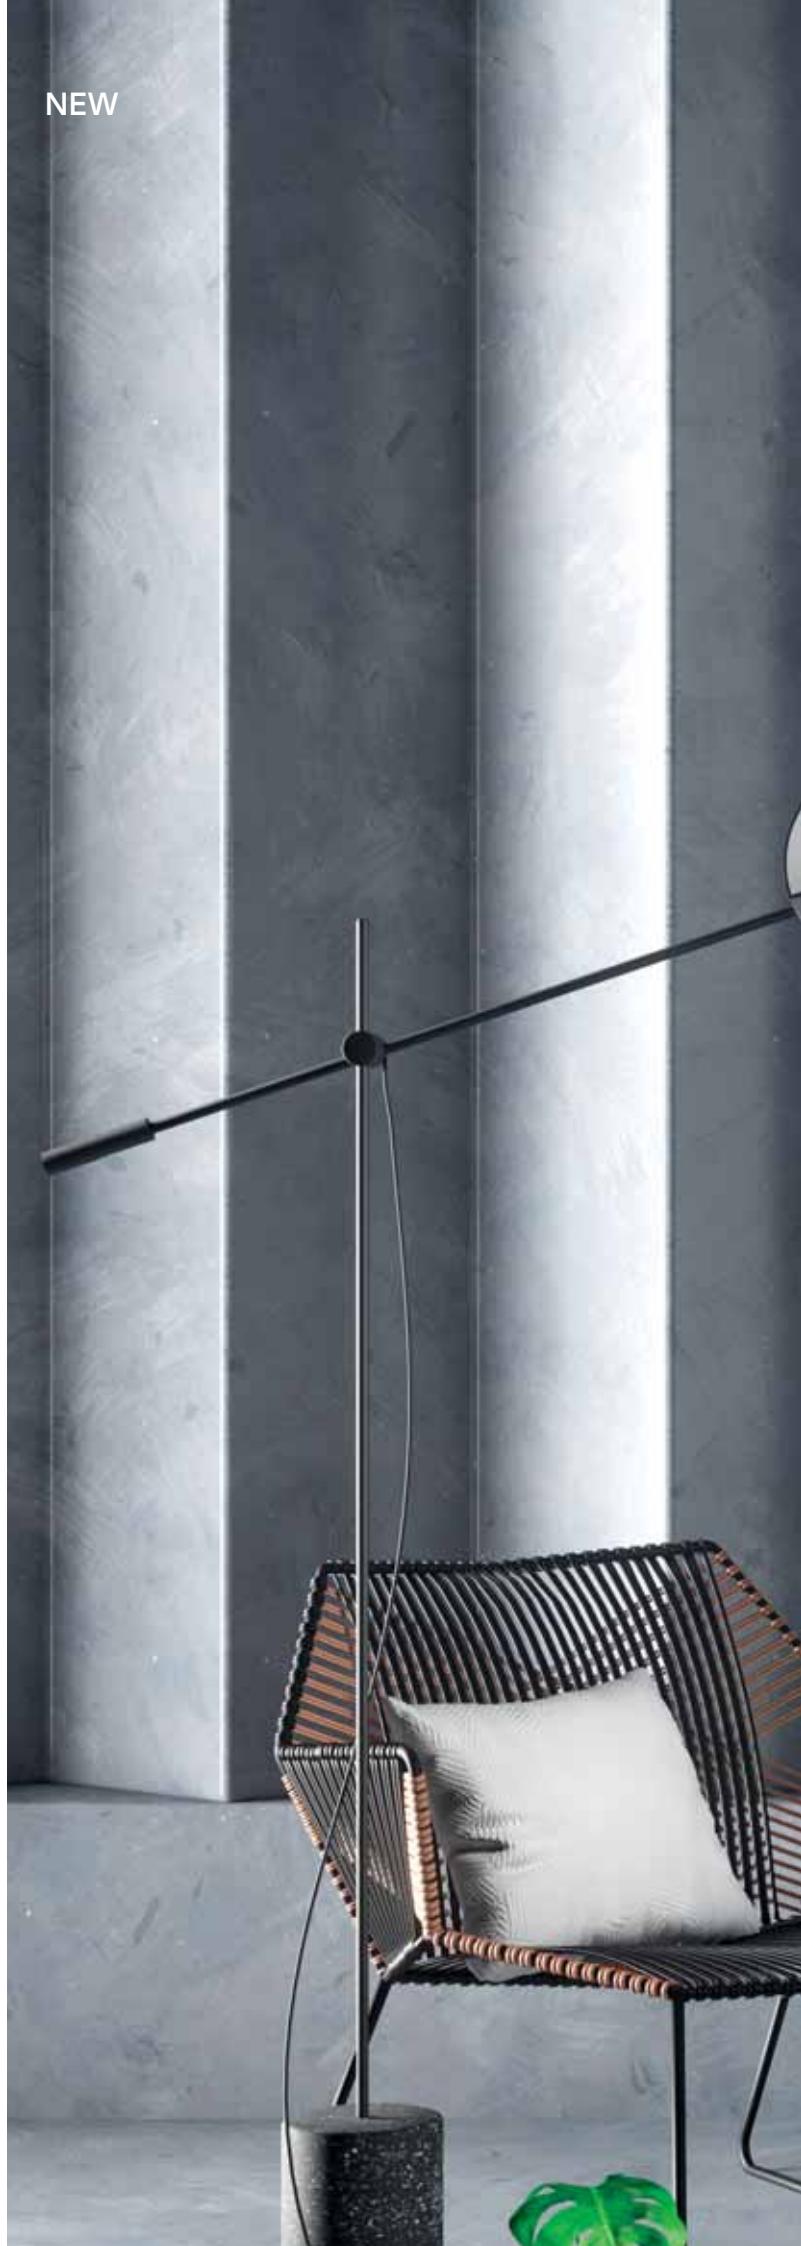





Frame



FRAME PLUS

IN PICTURE ON THE LEFT

model: vertical

L: 464 mm - H: 1622 mm

material: painted carbon steel

colour: T11 matt white

watt 789

accessories: polished straight hanger

technical data page 282



Frame

IN PICTURE

model: horizontal
L: 1622 mm - H: 464 mm
material: painted carbon steel
colour: F35 forest green
watt 789
accessories: wall-fit thermostatic valve
technical data page 286





Frame Max



IN PICTURE ON THE LEFT

model: vertical
L: 464 mm - H: 1822 mm
material: painted carbon steel
colour: F37 denim blue
watt 1788
accessories: corner tinta valve with thermostatic head - left
technical data page 288



Frame Lynea

by Marco Pisati



reddot award 2017
winner



archiproducts
DESIGN AWARDS
—
WINNER 2018



GERMAN
DESIGN
AWARD
SPECIAL
2019

IN PICTURE ON THE LEFT

model: vertical
L: 576 mm - H: 1822 mm
material: painted carbon steel
colour: R09 dark brown
watt 1100
technical data page 282

Lynea Accessories:

Hook
material: painted carbon steel
colour: F20 milky
TOWEL BAR LEFT
material: painted carbon steel
colour: F20 milky
technical data page 290

Frame Lynea

by Marco Pisati



IN THE PICTURE ON THE RIGHT

model: vertical
L: 464 mm - H: 2022 mm
material: painted carbon steel
colour: R21 silver grey
watt 978
technical data page 282

Lynea Accessories:

Hook
material: painted carbon steel
colour: R27 metal grey
SHELF FOR VERTICAL FRAME RADIATOR - L: 286 MM
material: oak moka textured
TOWEL BAR LEFT
material: painted carbon steel
colour: R27 metal grey
technical data page 290



red dot award 2017
winner



archiproducts
DESIGN AWARDS
—
WINNER 2018



GERMAN
DESIGN
AWARD
SPECIAL
2019





Frame Lynea

by Marco Pisati



reddot award 2017
winner



archiproducts[®]
DESIGN AWARDS
—
WINNER 2018



GERMAN
DESIGN
AWARD
SPECIAL
2019

IN PICTURE ON THE LEFT

model: vertical
L: 464 mm - H: 1822 mm
material: painted carbon steel
colour: R09 dark brown
watt 880
technical data page 282

IN THE UPPER PICTURE

Lynea Accessories:
SHELF FOR VERTICAL FRAME RADIATOR - L. 286 MM
material: whitened oak
SHELF FOR VERTICAL FRAME RADIATOR - L. 692 MM
material: whitened oak
technical data page 291



red dot award 2017
winner



archiproducts
DESIGN AWARDS
WINNER 2018



GERMAN
DESIGN
AWARD
SPECIAL
2019

Frame Lynea

by Marco Pisati

IN PICTURE

model: horizontal
L: 1822 mm - H: 464 mm
material: painted carbon steel
colour: F20 Milky
watt 880
technical data page 286


Lynea Accessories:
SHELF FOR HORIZONTAL FRAME RADIATOR – L. 800 MM
top | bottom
material: whitened oak
technical data page 291





Frame Lynea

by Marco Pisati

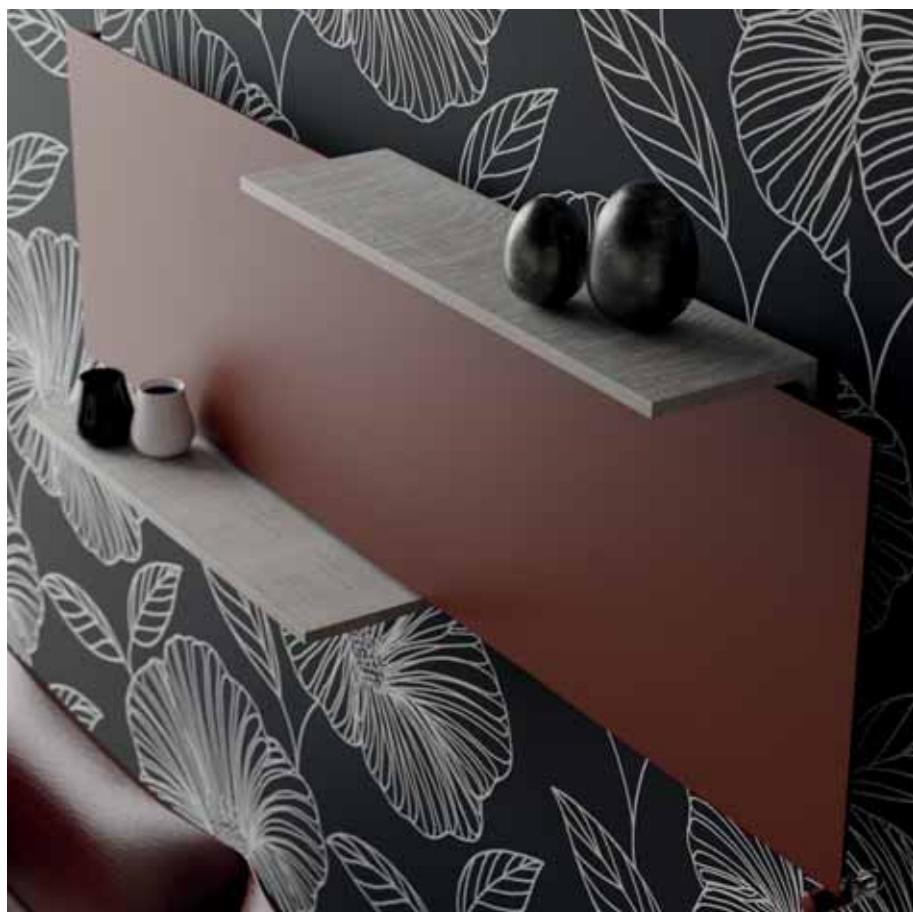

reddot award 2017
winner



archiproducts[®]
DESIGN AWARDS
—
WINNER 2018



GERMAN
DESIGN
AWARD
SPECIAL
2019

IN PICTURE ON THE LEFT

model: horizontal
L: 1622 mm - H: 352 mm
material: painted carbon steel
colour: F37 denim blue
watt 595
accessories: wall-fit thermostatic valve
technical data page 286

Lynea Accessories:
SHELF FOR HORIZONTAL FRAME RADIATOR - L. 800 MM
material: oak white textured
technical data page 291

**Frame Inox
electric**

IN PICTURE

model: vertical
L: 502 mm - H: 1416 mm
material: polished stainless steel
watt 900
top digital thermostat with infrared remote control
technical data page 294





Frame electric



IN THE PICTURE ON THE RIGHT

model: vertical
L: 502 mm - H: 1416 mm
material: painted carbon steel
colour: R27 metal grey
watt 900
top digital thermostat with infrared remote control
technical data page 296





NEW



IN PICTURE

model: vertical
L: 1416 mm - H: 502 mm
material: painted carbon steel
Colour: T11 matt white
watt 900 + 1000
Blower electric ventilation
technical data page 300



Frame Blower



IN THE UPPER PICTURE

FRAME INOX BLOWER
model: vertical

L: 1416 mm - H: 502 mm
material: polished stainless steel
watt 900 + 1000
Blower electric ventilation
technical data page 298

Frame Inox

Blower dual energy



IN THE PICTURE ON THE RIGHT

model: vertical
L: 502 mm - H: 1192 mm
material: polished stainless steel
watt 615 + 1000
Blower dual energy
technical data page 302

NEW

INOX STYLE



NEW



Frame Blower dual energy

IN PICTURE

model: vertical
L: 502 mm - H: 1192 mm
material: painted carbon steel
colour: F07 silver effect
watt 615 + 1000
Blower dual energy
technical data page 304



Andrea

When pure and rigorous elegance meets technology the result is a radiator that enriches all rest- and wellness-rooms.

Andrea towel rail adds to its exclusive and unique design, thanks to the patented technology, ergonomics, practical use and clean surfaces.



IN THE PICTURE ON THE RIGHT

L: 500 mm - H: 1410 mm
material: painted carbon steel
colour: T19 british grey
watt 489
accessories: tinta valve pipe centres 50 mm
with thermostatic head right
technical data page 306







Andrea



IN PICTURE ON THE LEFT

L: 500 mm - H: 1410 mm

material: painted carbon steel

colour: R01 pure white

watt 489

accessories: tinta valve pipe centres 50 mm with thermostatic head left
technical data page 306



Andrea electric



IN PICTURE ON THE LEFT

L: 500 mm - H: 1410 mm
material: painted carbon steel
colour: F25 quartz dust
watt 700
top digital thermostat with infrared remote control
technical data page 308

Jacky



IN THE PICTURE ON THE RIGHT

L: 500 mm - H: 1260 mm
material: painted carbon steel
colour: R02 traffic white
watt 566
accessories: elegant polished valve
with pipe centres 50 mm square left
technical data page 310







Jacky electric



IN PICTURE ON THE LEFT

L: 500 mm - H: 1260 mm
material: painted carbon steel
colour: R13 jet black
watt 600
top digital thermostat with infrared remote control
technical data page 312

Yara



ICO 2
NIC 0
AWA 1
RDS 8
**INNOVATIVE
INTERIOR**
selection

IN THE UPPER PICTURE

L: 500 mm - H: 988 mm
material: painted carbon steel
colour: R01 pure white
watt 465
accessories: tinta valve pipe centres 50 mm
with thermostatic head left
technical data page 314

156 CORDIVARI
DESIGN





IN PICTURE

L: 500 mm - H: 988 mm
material: painted carbon steel
colour: R13 jet black
watt 465
accessories: tinta valve pipe centres 50 mm with thermostatic head
right
technical data page 314



IN PICTURE

L: 500 mm - H: 1408 mm

material: painted carbon steel

colour: F36 terra

watt 548

accessories: tinta valve pipe centres 50 mm with thermostatic head right
technical data page 316

Debby



IN THE UPPER PICTURE

L: 500 mm - H: 1408 mm

material: painted carbon steel

colour: R40 pearl white

watt 548

accessories: elegant polished valve with pipe centres 50 mm square left
technical data page 316



Groove®

design Mariano Moroni



IN PICTURE ON THE LEFT

L: 416 mm - H: 2000 mm
material: aluminium
colour: R02 traffic white
watt 1460

accessories: tinta valve pipe centres 50 mm with thermostatic head left
technical data page 318

Roads®

design Mariano Moroni

"Roads® means the research for essentiality, with a simple and pure formal language.

Vertical heating elements, continuously playing with lights and shadows, are creating parallel streets in a fantasy Metropole".

M. Moroni

IN THE PICTURE ON THE RIGHT

L: 496 mm - H: 1800 mm
material: aluminium
colour: S02 manhattan
watt 1315
accessories: tinta valve pipe centres 50 mm
with thermostatic head right
technical data page 320







Roads® stf

design Mariano Moroni



PROFILE-COVER
POLISHED

PROFILE-COVER
MATCHING IN COLOUR

IN PICTURE ON THE LEFT

L: 1188 mm - H: 740 mm
material: aluminium
colour: F09 graphite grey
profile-cover: polished
watt 1506
technical data page 322



RETRÒ I | RETRÒ II | RETRÒ III RETRÒ I | RETRÒ II | RETRÒ III

Retrò is the line of Cordivari radiators, inspired by classical forms and elegant design.

With timeless shapes these decorative radiators are available with shiny and bright finishing to decorate your bathrooms with the most exclusive taste.

The Retrò line is available in 3 models with 3 different finishes: chrome, antique bronze, antique Gold.


CLASSIC LINE



IN PICTURE

model: Retrò II
L: 575 mm - H: 975 mm
finish: chrome
accessories: chrome square manual elegant valve
technical data page 324

Retrò

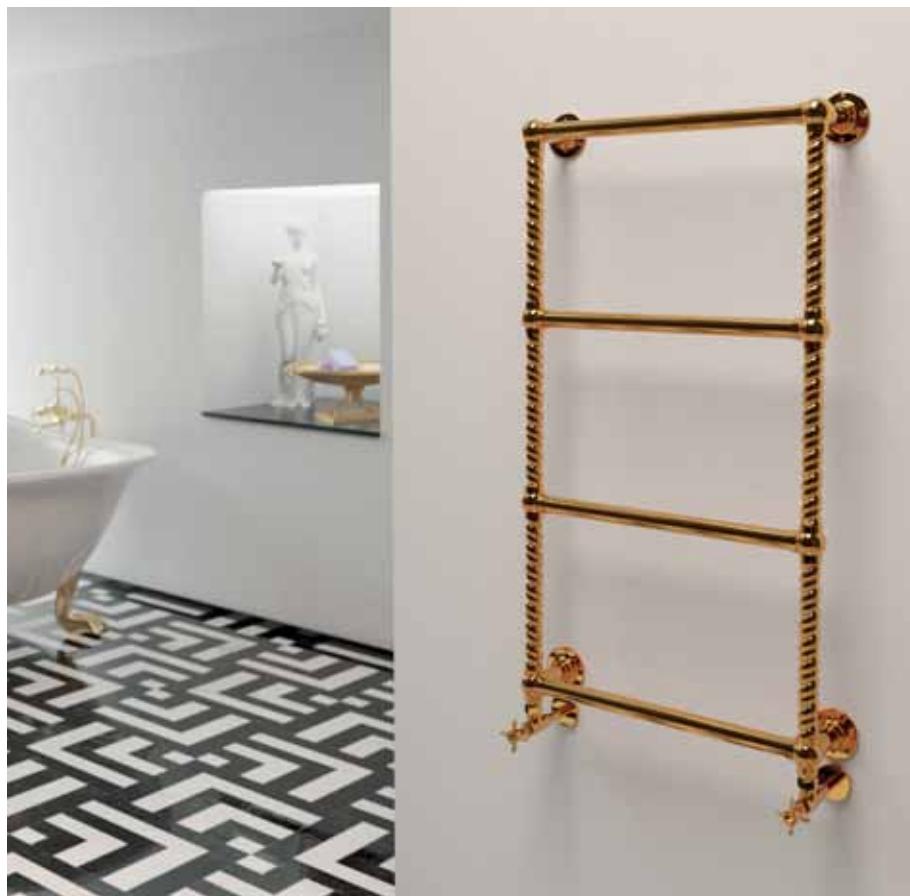

IN THE UPPER PICTURE

model: Retrò I
L: 575 mm - H: 975 mm
finish: antique gold
accessories: antique gold square manual elegant valve
technical data page 324



E V E N T S



BOLOGNA
MILLELCI



Retrò

Retrò is the line of Cordivari radiators, inspired by classical forms and elegant design.

With timeless shapes these decorative radiators are available with shiny and bright finishing to decorate your bathrooms with the most exclusive taste.

The Retrò line is available in 3 models with 3 different finishes: chrome, antique bronze, antique Gold.

IN THE PICTURE ON THE RIGHT

model: Retrò III
L: 675 mm - H: 970 mm
finish: antique gold
accessories: antique gold square manual elegant valve
technical data page 324







IN PICTURE

model: Retrò III electric
L: 675 mm - H: 970 mm
finish: antique bronze
Pipe covering kit antique bronze
technical data page 326

Retrò electric



IN THE UPPER PICTURE

model: Retrò I electric
L: 575 mm - H: 975 mm
finish: chrome
Pipe covering kit chrome
technical data page 326



FRAME TRENDS | FRAME PICTURE ROSY GRAPHIC

Heat and colour. The picture radiator spreading the heat through beautiful colours and images, becomes the canvas of a painter or a frame upon which the most exciting impressions of your life are captured.

An innovative and everlasting painting process, internationnaly awarded, with high quality finishing and environment friendly approach. The radiator becomes a design object, an element that personalizes your living environment, making it a unique item, enriched by chromatic effects you can choose between graphic solutions proposed by Cordivari design, created by painters, artists, designers or by yourself with your favourite image, which will capture forever on the radiator your desired image.

GRAPHIC PICTURE

Frame Trends

IN THE PICTURE ON THE RIGHT

model: vertical
L: 576 mm - H: 1822 mm
artwork: Materia 01
watt 1100
accessories: manual square elegant valve
technical data page 334





Frame Picture

artwork Mariano Moroni

IN THE PICTURE ON THE RIGHT

model: vertical
L: 464 mm - H: 2022 mm

artwork: corallo
watt 978

accessories: wall-fit thermostatic valve
technical data page 346





Cordivari Design presents a attractive range of radiators with exclusive colour combinations created by architect and artist Mariano Moroni.

The new graphics are available on FRAME, FRAME PLUS and FRAME MAX radiators. The accurate manufacturing and impeccable finishes enhance the elegance and harmony of the new Frame colours.

The entire range is accessorized with handy and essential satin stainless steel towel bars.

Frame Picture

artwork **Mariano Moroni**

IN PICTURE


model: vertical

L: 352 mm - H: 1822 mm

artwork: season 06

watt 676

accessories: manual square polished elegant valve
technical data page 346

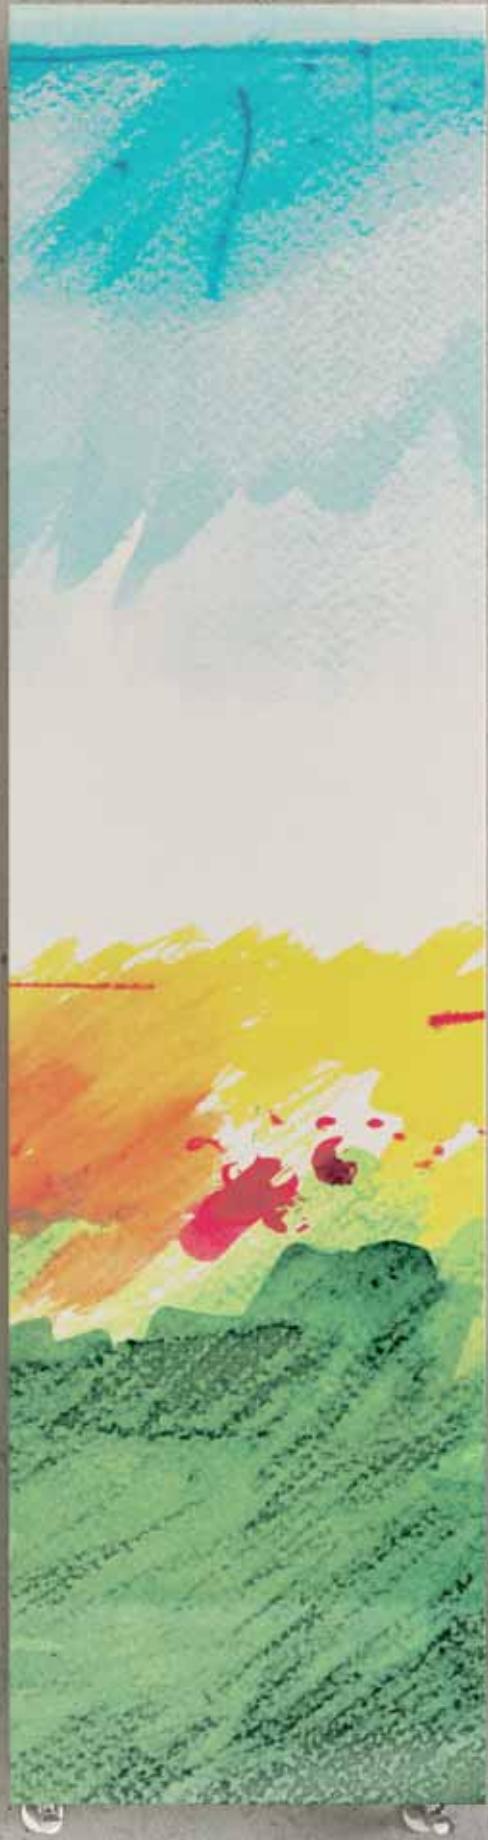

Frame Picture

IN THE PICTURE ON THE RIGHT

model: vertical

L: 576 mm - H: 1822 mm


artwork: due donne Tahitiane

watt 1100

accessories: wall-fit thermostatic valve

technical data page 344



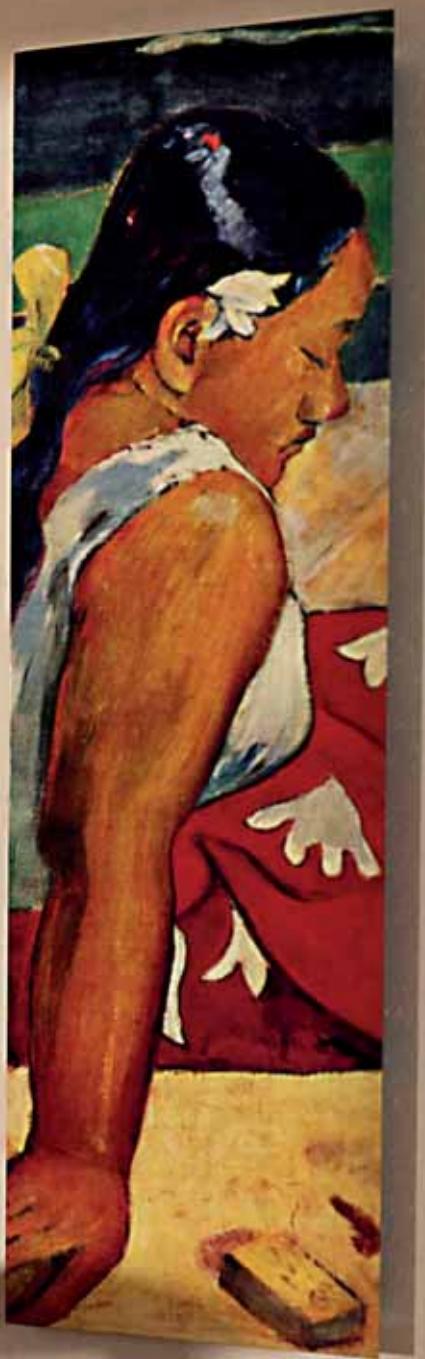

Frame Picture trittico

IN PICTURE

model: vertical
L: 464 mm - H: 2022 mm (x3)
artwork: fisher
watt 978 (x3)
accessories: wall-fit thermostatic valve
technical data page 344





Rosy Graphic

artwork Mariano Moroni



IN PICTURE ON THE LEFT

model: vertical
H: 2000 mm - L: 280 mm (x2)
artwork: totem white (left) | totem black (right)
watt 630 (x2)
technical data page 356

Rosy Graphic

artwork Mariano Moroni

Cordivari proposes an evolution of personalized radiators with the Rosy Graphic models: 3 single columns radiators in painted carbon steel which are decorated with original graphics ideated by the Arch. Mariano Moroni.

Vertical and horizontal dimensions and colours have been chosen with care, to offer an exclusive design radiator collection, easy to place in every contemporaneous living space.

IN THE PICTURE ON THE RIGHT

model: vertical
L: 560 mm - H: 2000 mm
artwork: ring
watt 1260
accessories: manual square painted elegant valve
technical data page 356





NEW

Rosy Graphic

artwork Mariano Moroni

in picture

model: vertical
artwork: urban white (left)
H: 2000 mm - L: 280 mm
watt 630
artwork: urban black (right)
H: 2000 mm - L: 504 mm
watt 1134
accessories: corner right valves
with thermostatic head
technical data page 360





CORDIVARI
DESIGN

TECHNICAL
DATA



LOLA® HORIZONTAL SATIN STAINLESS STEEL

3D
TRADEMARK



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in satin stainless steel with ϕ of 38 mm.
Curved heating elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EN **442-1**

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD

GOLD VILLA AWARD

ACCESSORIES



Elegant manual square satin valve

Copper connection ϕ 12/14/15
Art. Nr. 5991990320209

Multilayer connection ϕ 16 x2
Art. Nr. 5991990320208



Elegant manual reverse satin valve


Copper connection ϕ 12/14/15
Art. Nr. 5991990320207

Multilayer connection ϕ 16 x2
Art. Nr. 5991990320206




Kit 2 hooks satin stainless steel

Art. Nr. 5991990010224



Measures for Elegant square manual valve










Measures for Elegant reverse manual valve



Pipe covering kit for satin valves





Art. Nr. 5103000000045

Accessories and spare parts - see from page 366.

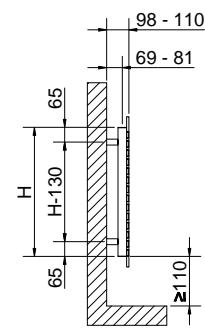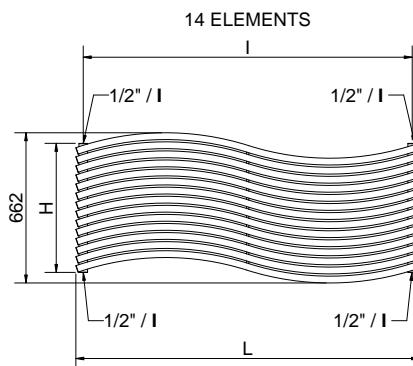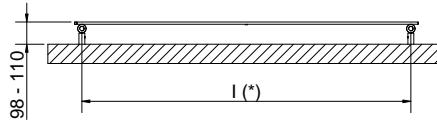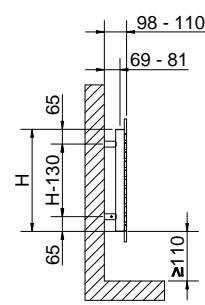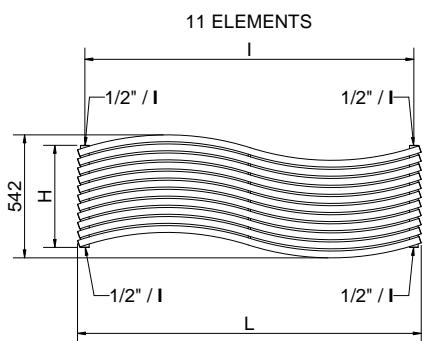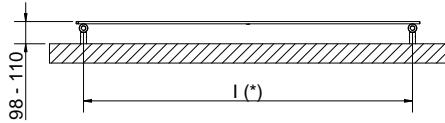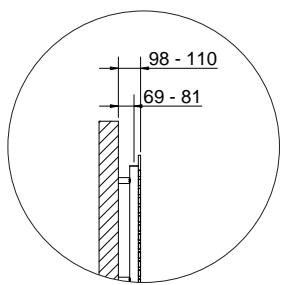

(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections



Special connection

Indicate the pipe centres X



Always specify the kind of connection needed when ordering (from H1 to H7).

Legend = ► In ► Out ≤ Airvent **H** Height | Pipe Centres **L** Width □ Connection

LOLA® HORIZONTAL - SATIN STAINLESS STEEL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|--------------|---------|------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 355174000001 | H1 | 450 | 1516 | 1450 | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000013 | | 570 | 1516 | 1450 | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |
| 355174000016 | H2 | 450 | 1516 | - | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000064 | | 570 | 1516 | - | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |
| 355174000094 | H3 | 450 | 1516 | - | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000093 | | 570 | 1516 | - | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |
| 355174000027 | H4 | 450 | 1516 | 530 | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000061 | | 570 | 1516 | 650 | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |
| 355174000063 | H5 | 450 | 1516 | 530 | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000070 | | 570 | 1516 | 650 | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |
| 355174000036 | H6 | 450 | 1516 | 390 | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000085 | | 570 | 1516 | 510 | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |
| 355174000067 | H7 | 450 | 1516 | 390 | 15,5 | 1,45 | 4,1 | 549 | 287 | 1,2712 |
| 355174000082 | | 570 | 1516 | 510 | 19,0 | 1,84 | 5,1 | 698 | 363 | 1,2804 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



LOLA® HORIZONTAL POLISHED STAINLESS STEEL

3D
TRADEMARK



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Curved heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EN **442-1**

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD

GOLD VILLA AWARD

ACCESSORIES



Elegant square manual polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083



Elegant reverse manual polished valve kit


Copper connection \varnothing 12/14/15
Art. Nr. 5991990301082

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301081




Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223

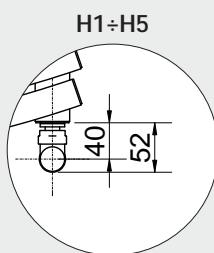

Measures for Elegant square manual valve

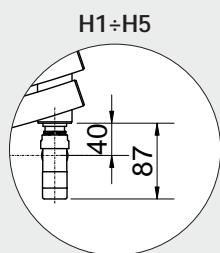








Measures for Elegant reverse manual valve



Pipe covering kit for polished valves






Art. Nr. 5103000000044

Accessories and spare parts- see from page 366.

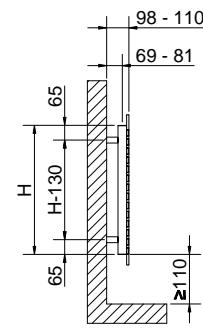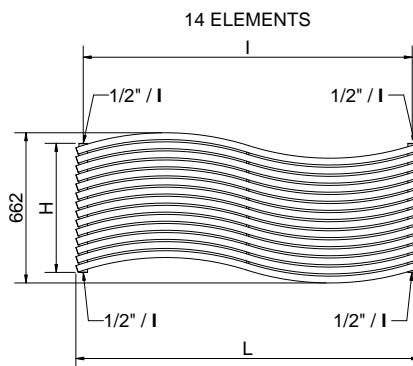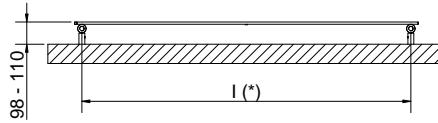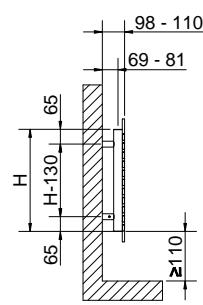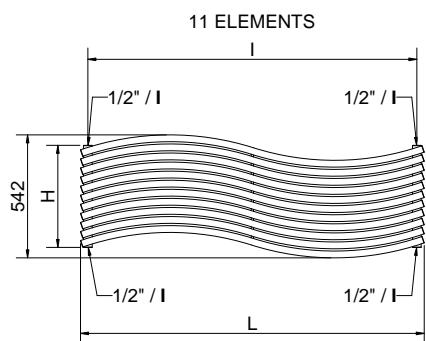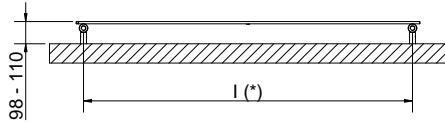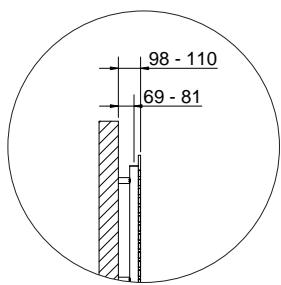

(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections



Special connection

Indicate the pipe centres X



Always specify the kind of connection needed when ordering (from H1 to H7).

Legend = ► In ► Out ≤ Airvent **H** Height | Pipe Centres **L** Width □ Connection

LOLA® HORIZONTAL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|---------|------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551740000005 | H1 | 450 | 1516 | 1450 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000004 | | 570 | 1516 | 1450 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |
| 3551740000050 | H2 | 450 | 1516 | - | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000107 | | 570 | 1516 | - | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |
| 3551740000108 | H3 | 450 | 1516 | - | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000095 | | 570 | 1516 | - | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |
| 3551740000042 | H4 | 450 | 1516 | 530 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000068 | | 570 | 1516 | 650 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |
| 3551740000080 | H5 | 450 | 1516 | 530 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000058 | | 570 | 1516 | 650 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |
| 3551740000053 | H6 | 450 | 1516 | 390 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000014 | | 570 | 1516 | 510 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |
| 3551740000051 | H7 | 450 | 1516 | 390 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 |
| 3551740000055 | | 570 | 1516 | 510 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



LOLA® HORIZONTAL

POLISHED AND SATIN STAINLESS STEEL

DECOR X03 | DECOR X04

artwork Mariano Moroni



3D
TRADEMARK

10 YEARS
WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel/satin with Ø of 38 mm.
Curved heating elements in polished stainless steel/satin 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EURONORM
EN 442-1

P. max: 8 bar

T. max: 110° C

Available for central heating systems





Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD

GOLD VILLA
AWARD

LOLA® DECOR X03

LOLA® DECOR X04

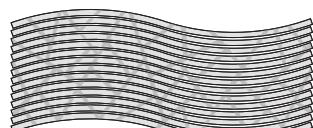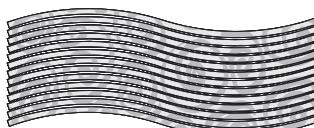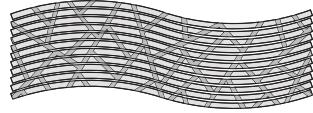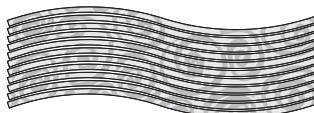

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084


Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Elegant reverse manual polished valve kit


Copper connection Ø 12/14/15
Art. Nr. 5991990301082

Multilayer connection Ø 16 x2
Art. Nr. 5991990301081




Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223



Measures for Elegant square manual valve









Measures for Elegant reverse manual valve



Pipe covering kit for polished valves






Art. Nr. 5103000000044

Accessories and spare parts - see from page 366.

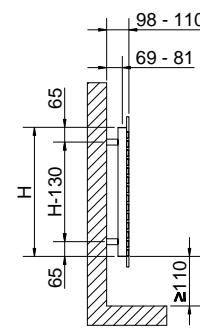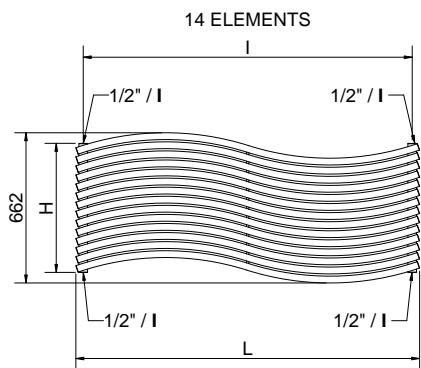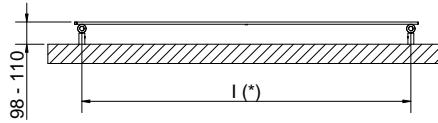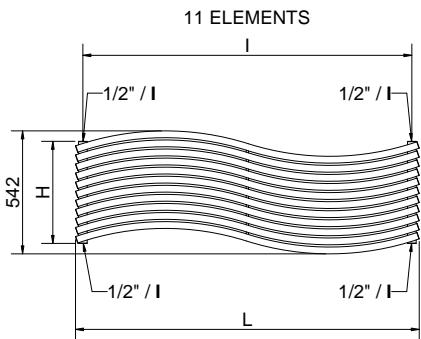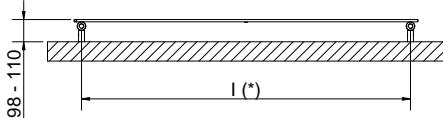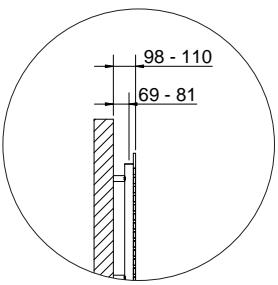

(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections



Always specify the kind of connection needed when ordering (from H1 to H7).

Special connection

Indicate the pipe centres X



LOLA® DECOR HORIZONTAL

| Variant | DECOR X03 | | | DECOR X04 | | | Dry Weight [Kg] | Surface [m²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|---------|---------------|--------------|---------------------|---------------|---------------|---------------------|-----------------|--------------|--------------------|---------------------|--------|------------|
| | Height H [mm] | Width L [mm] | Pipe Centres I [mm] | Art. Nr. | Art. Nr. | Δt = 50°C Δt = 30°C | | | | 507 | 264 | |
| | 450 | 1516 | 1450 | 3551740000006 | 3551740130140 | 507 | 264 | 1,2746 | 645 | 334 | 1,2878 | |
| H1 | 570 | 1516 | 1450 | 3551740000007 | 3551740130141 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |
| | 450 | 1516 | - | 3551740000072 | 3551740130142 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 | |
| H2 | 570 | 1516 | - | 3551740000073 | 3551740130143 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |
| | 450 | 1516 | - | 3551740000112 | 3551740130144 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 | |
| H3 | 570 | 1516 | - | 3551740000102 | 3551740130145 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |
| | 450 | 1516 | 530 | 3551740000066 | 3551740130146 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 | |
| H4 | 570 | 1516 | 650 | 3551740000059 | 3551740130147 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |
| | 450 | 1516 | 530 | 3551740000083 | 3551740130148 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 | |
| H5 | 570 | 1516 | 650 | 3551740000078 | 3551740130149 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |
| | 450 | 1516 | 390 | 3551740000074 | 3551740130150 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 | |
| H6 | 570 | 1516 | 510 | 3551740000098 | 3551740130151 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |
| | 450 | 1516 | 390 | 3551740000089 | 3551740130152 | 15,5 | 1,45 | 4,1 | 507 | 264 | 1,2746 | |
| H7 | 570 | 1516 | 510 | 3551740000113 | 3551740130153 | 19,0 | 1,84 | 5,1 | 645 | 334 | 1,2878 | |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



LOLA® VERTICAL SATIN STAINLESS STEEL

3D
TRADEMARK



**10 YEARS
WARRANTY**

MATERIAL:

Horizontal collectors in satin stainless steel with Ø of 38 mm.
Curved heating elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EN **442-1**

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

AWARD

GOLD VILLA AWARD

ACCESSORIES



Elegant manual square satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16 x2
Art. Nr. 5991990320208



Elegant square satin valve kit pipe centres 50 mm with thermostatic head - right


Copper connection Ø 12/14/15
Art. Nr. 5991990320201

Multilayer connection Ø 16 x2
Art. Nr. 5991990320200




Kit 2 hooks satin stainless steel

Art. Nr. 5991990010224




V9÷V10

Measures for Elegant square manual valve



V7÷V8

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm




V11




Pipe covering kit for satin valves

Art. Nr. 5103000000045

Accessories and spare parts - see from page 366.

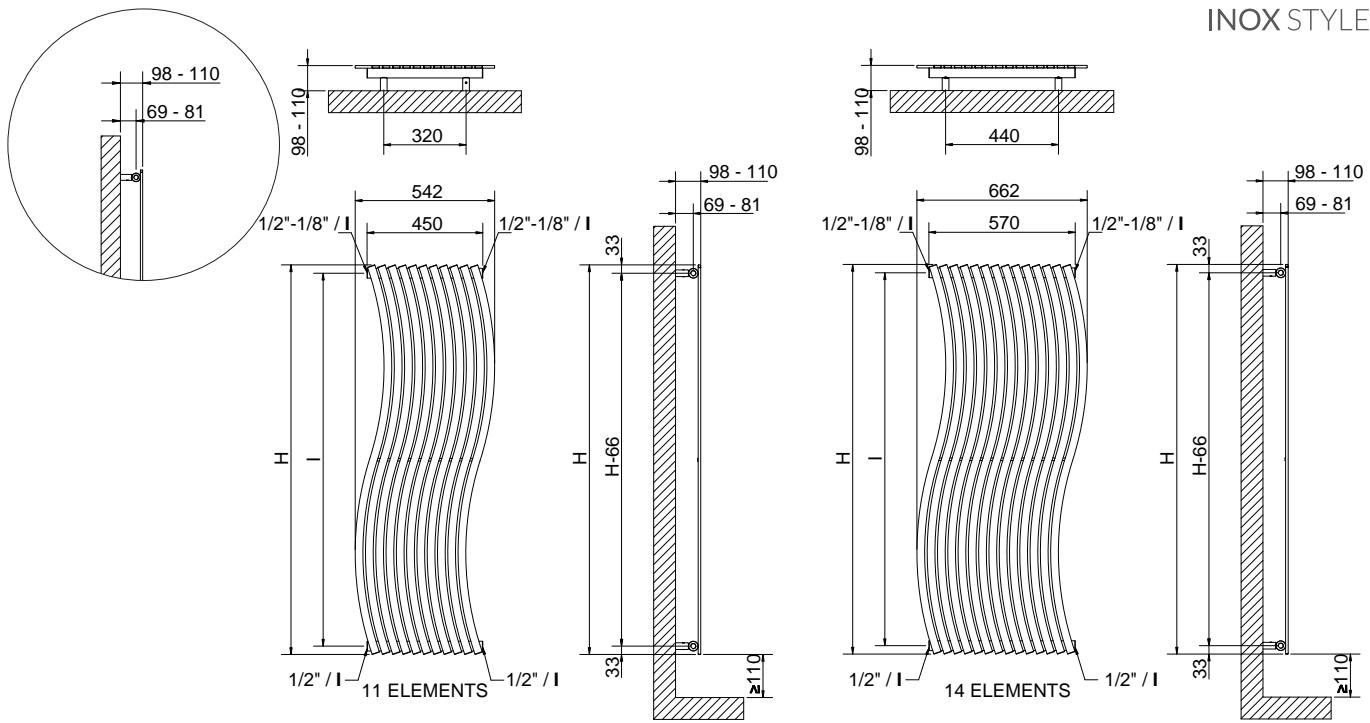

Standard connections

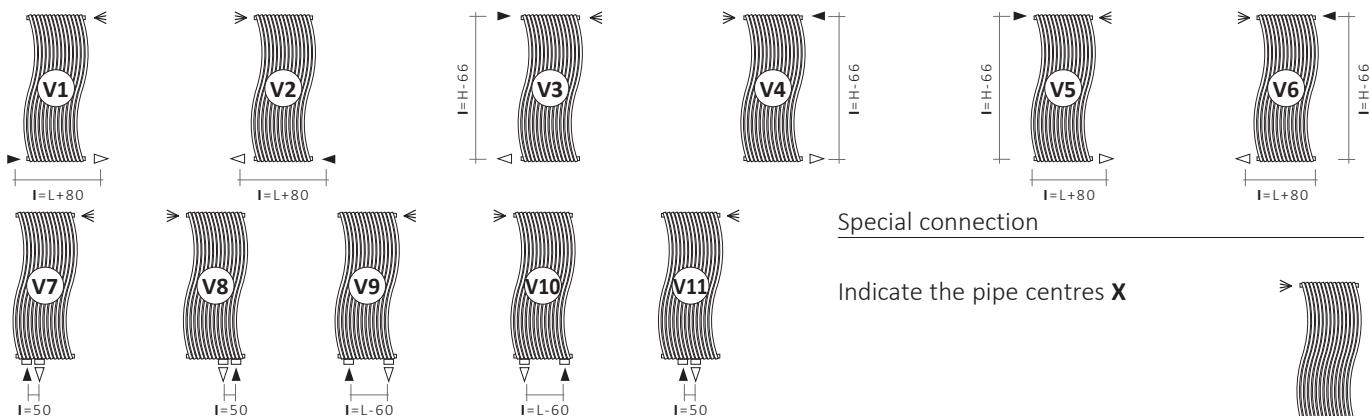

Always specify the kind of connection needed when ordering (from V1 to V11).

Legend = In Out Airvent Height Pipe Centres Width Connection

Special connection

Indicate the pipe centres X



LOLA® VERTICAL - SATIN STAINLESS STEEL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n |
|---------------|---------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C |
| 3551740130001 | V1 | 1516 | 450 | 530 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740130002 | | | 570 | 650 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000016 | V2 | 1516 | 450 | 530 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000062 | | | 570 | 650 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000069 | V3 | 1516 | 450 | 1450 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000047 | | | 570 | 1450 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000019 | V4 | 1516 | 450 | 1450 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000023 | | | 570 | 1450 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000077 | V5 | 1516 | 450 | - | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000103 | | | 570 | - | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000104 | V6 | 1516 | 450 | - | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000105 | | | 570 | - | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000054 | V7 | 1516 | 450 | 50 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000030 | | | 570 | 50 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000039 | V8 | 1516 | 450 | 50 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000011 | | | 570 | 50 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000040 | V9 | 1516 | 450 | 390 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000012 | | | 570 | 510 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000037 | V10 | 1516 | 450 | 390 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000022 | | | 570 | 510 | 19,0 | 1,84 | 5,1 | 708 | 365 |
| 3551740000008 | V11 | 1516 | 450 | 50 | 15,5 | 1,45 | 4,1 | 557 | 289 |
| 3551740000038 | | | 570 | 50 | 19,0 | 1,84 | 5,1 | 708 | 365 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



LOLA® VERTICAL POLISHED STAINLESS STEEL

3D
TRADEMARK



**10 YEARS
WARRANTY**

MATERIAL:

Horizontal collectors in polished stainless steel with ϕ of 38 mm.
Curved heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EN **442-1**

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

AWARD

GOLD VILLA AWARD

ACCESSORIES



Elegant square manual polished valve kit

Copper connection ϕ 12/14/15
Art. Nr. 5991990301084


Multilayer connection ϕ 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right


Copper connection ϕ 12/14/15
Art. Nr. 5991990301076

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301075




Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223

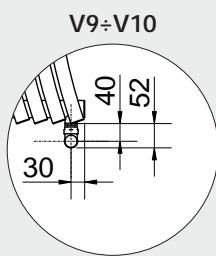


V9÷V10

Measures for Elegant square manual valve

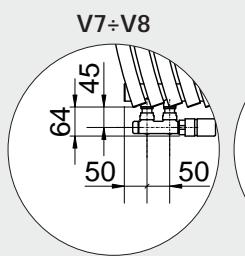

V7÷V8

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

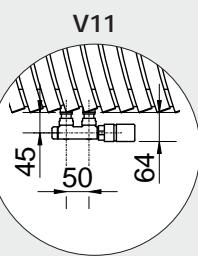


V11




Pipe covering kit for polished valves

Art. Nr. 5103000000044

Accessories and spare parts - see from page 366.

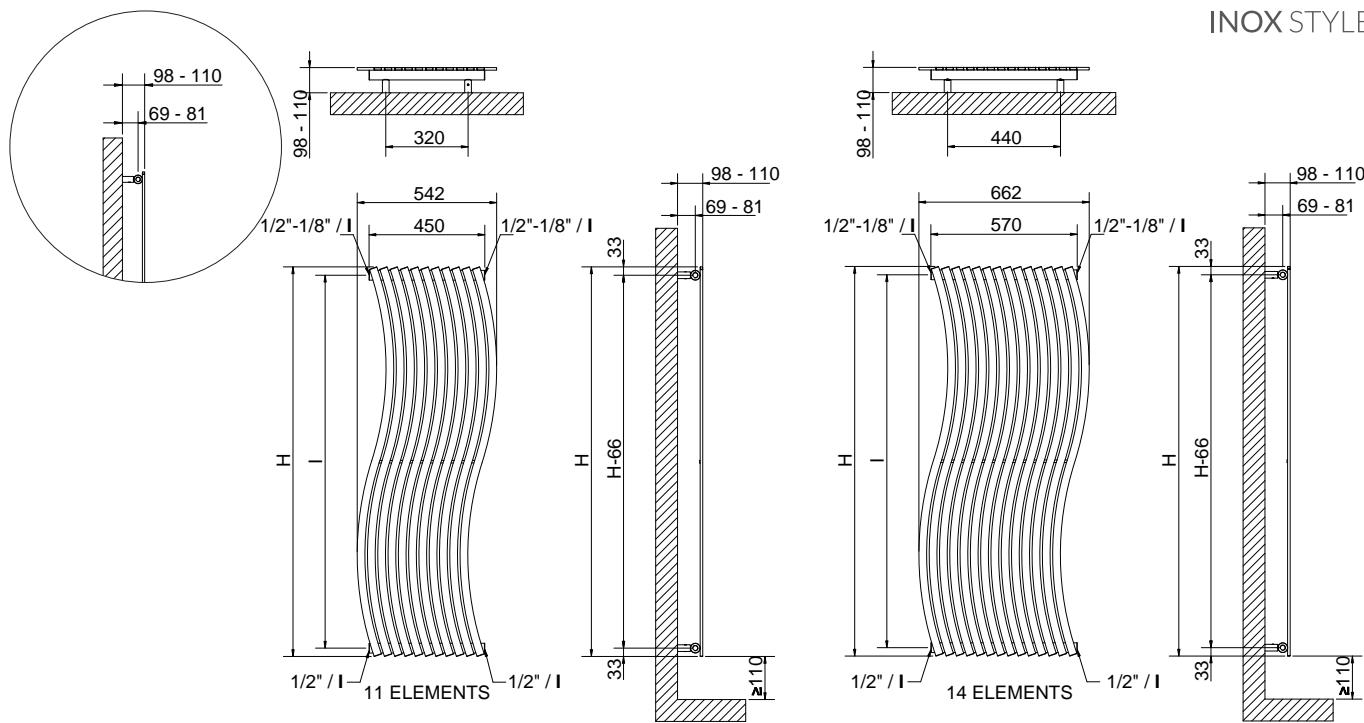

Standard connections

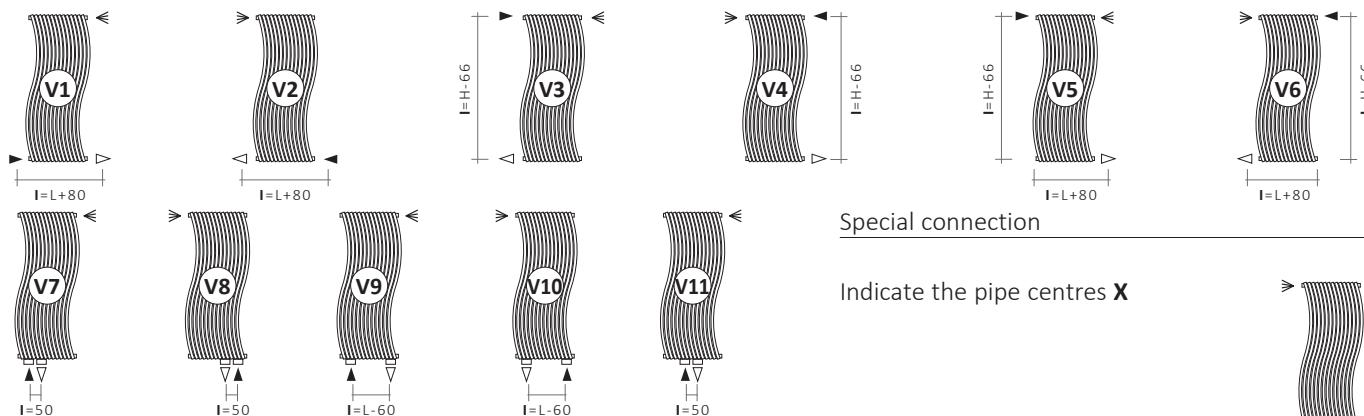


Always specify the kind of connection needed when ordering (from V1 to V11).

Legend = In Out Airvent Height Pipe Centres Width Connection

LOLA® VERTICAL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n |
|---------------|---------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C |
| 3551740130011 | V1 | 1516 | 450 | 530 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 3551740130012 | | | 570 | 650 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000035 | V2 | 1516 | 450 | 530 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000009 | | | 570 | 650 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000052 | V3 | 1516 | 450 | 1450 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000049 | | | 570 | 1450 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000018 | V4 | 1516 | 450 | 1450 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000044 | | | 570 | 1450 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 3551740000100 | V5 | 1516 | 450 | - | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000056 | | | 570 | - | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 3551740000101 | V6 | 1516 | 450 | - | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 3551740000109 | | | 570 | - | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000024 | V7 | 1516 | 450 | 50 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000097 | | | 570 | 50 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000029 | V8 | 1516 | 450 | 50 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000021 | | | 570 | 50 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000020 | V9 | 1516 | 450 | 390 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000033 | | | 570 | 510 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000015 | V10 | 1516 | 450 | 390 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000010 | | | 570 | 510 | 19,0 | 1,84 | 5,1 | 645 | 334 |
| 355174000025 | V11 | 1516 | 450 | 50 | 15,5 | 1,45 | 4,1 | 507 | 264 |
| 355174000041 | | | 570 | 50 | 19,0 | 1,84 | 5,1 | 645 | 334 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n

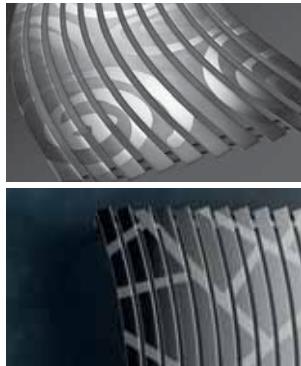

LOLA® VERTICAL

POLISHED AND SATIN STAINLESS STEEL

DECOR X03 | DECOR X04



3D
TRADEMARK

10 YEARS
WARRANTY

MATERIAL:

Horizontal collectors in polished stainless steel/satin with Ø of 38 mm.
Curved heating elements in polished stainless steel/satin 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EN **442-1**

P. max: 8 bar

T. max: 110° C


Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"


AWARD

GOLD VILLA
AWARD

LOLA® DECOR X03

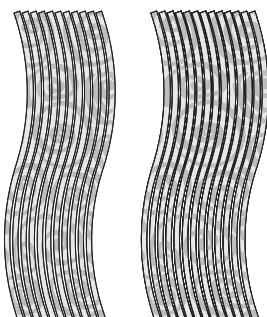

LOLA® DECOR X04

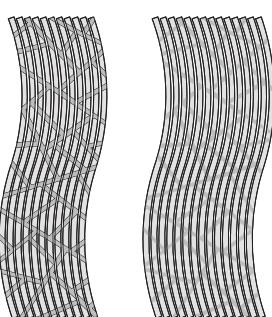

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right


Copper connection Ø 12/14/15
Art. Nr. 5991990301076

Multilayer connection Ø 16 x2
Art. Nr. 5991990301075




Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223

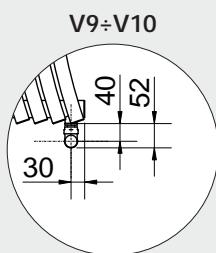


V9÷V10

Measures for Elegant square manual valve

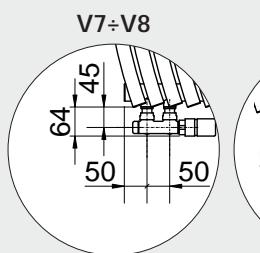

V7÷V8

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

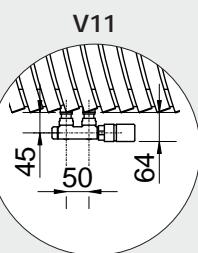


V11





Pipe covering kit for polished valves

Art. Nr. 5103000000044

Accessories and spare parts - see from page 366.

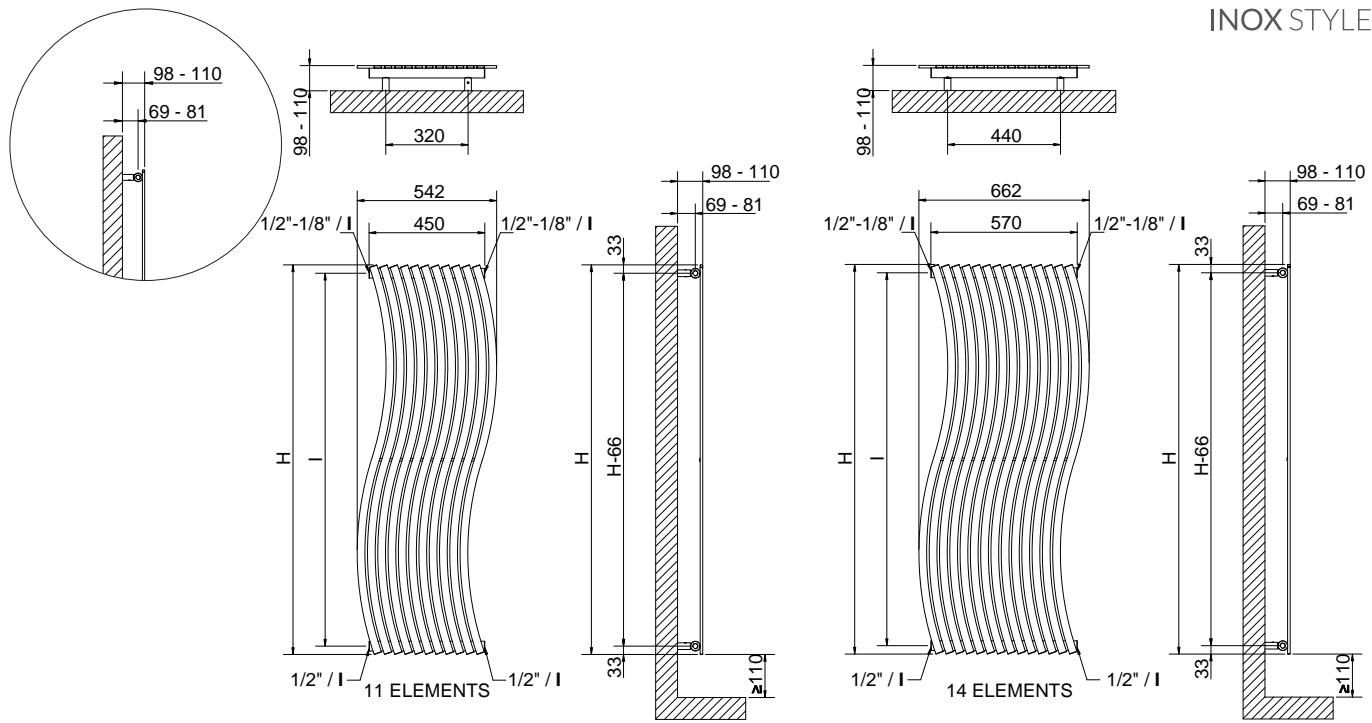

Standard connections

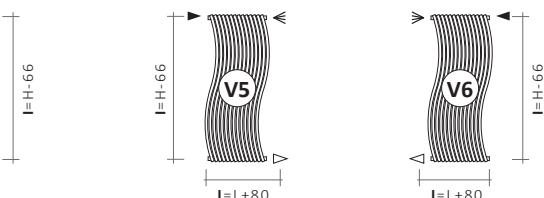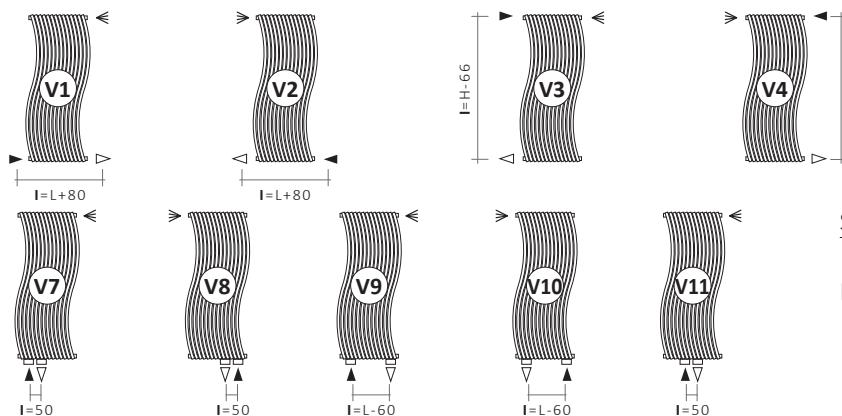

Special connection

Indicate the pipe centres X



Always specify the kind of connection needed when ordering (from V1 to V11).

Legend = ▶ In ▷ Out ≈ Airvent H Height | Pipe Centres L Width □ Connection

LOLA® DECOR VERTICAL

| Variant | Height H [mm] | Width L [mm] | Pipe Centres I [mm] | DECOR X03 | | DECOR X04 | | Dry Weight [Kg] | Surface [m²] | Water Content [lt] | Thermal output Watt | Exponent n | | | | | |
|---------|------------------|-----------------|---------------------------|---------------|--|---------------|--|-----------------------|-----------------|--------------------------|------------------------|---------------|--|--|--|--|--|
| | | | | Art. Nr. | | Art. Nr. | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| V1 | 1516 | 450 | 530 | 3551740130101 | | 3551740130103 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 650 | 3551740130102 | | 3551740130104 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V2 | 1516 | 450 | 530 | 3551740000075 | | 3551740130105 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 650 | 3551740000034 | | 3551740130106 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V3 | 1516 | 450 | 1450 | 3551740000003 | | 3551740130107 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 1450 | 3551740000031 | | 3551740130108 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V4 | 1516 | 450 | 1450 | 3551740000043 | | 3551740130109 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 1450 | 3551740000032 | | 3551740130110 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V5 | 1516 | 450 | - | 3551740000079 | | 3551740130111 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | - | 3551740000081 | | 3551740130112 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V6 | 1516 | 450 | - | 3551740000110 | | 3551740130113 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | - | 3551740000111 | | 3551740130114 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V7 | 1516 | 450 | 50 | 3551740000076 | | 3551740130115 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 50 | 3551740000071 | | 3551740130116 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V8 | 1516 | 450 | 50 | 3551740000045 | | 3551740130117 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 50 | 3551740000084 | | 3551740130118 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V9 | 1516 | 450 | 390 | 3551740000046 | | 3551740130119 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 510 | 3551740000028 | | 3551740130120 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V10 | 1516 | 450 | 390 | 3551740000065 | | 3551740130121 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 510 | 3551740000060 | | 3551740130122 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |
| V11 | 1516 | 450 | 50 | 3551740000026 | | 3551740130123 | | 15,5 | 1,45 | 4,1 | 507 | 264 | | | | | |
| | | 570 | 50 | 3551740000086 | | 3551740130124 | | 19,0 | 1,84 | 5,1 | 645 | 334 | | | | | |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt /50)^n



BLOW®

POLISHED STAINLESS STEEL

design Jean-Marie Massaud



5 YEARS
WARRANTY

MATERIAL:

Polished stainless steel.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves with thermostatic head

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16 x2)

PACKAGING:

The radiator is protected by a wooden crate and carton.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES








P. max: 5 bar

T. max: 110° C


Available for central heating systems

AWARD




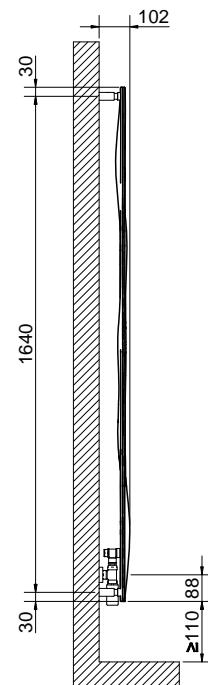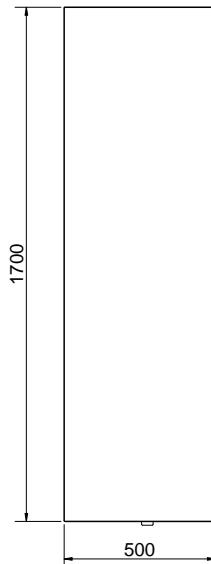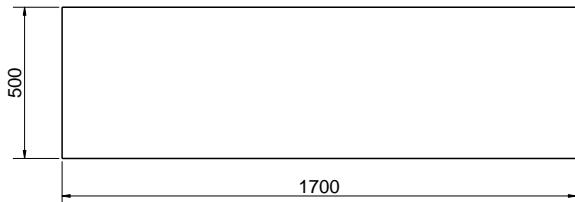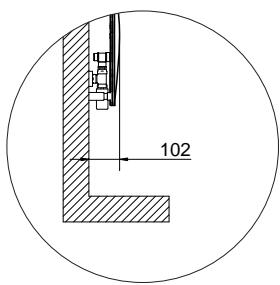

Version with Pipe Centres 50 mm

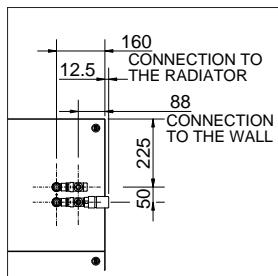

Horizontal version

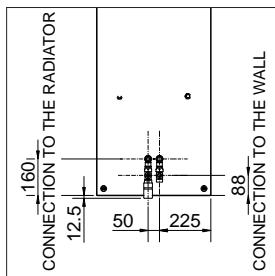

Vertical version

BLOW® POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | |
| 3540640130001 | 1700 | 500 | 50 | 18,7 | 1,7 | 1,3 | 700 | 374 |
| 3540640130001 | 500 | 1700 | 50 | | | | | 1,2247 |

Art. Nr. include valve and thermostatic head, in accordance with EN215:2007

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



RIO®

SATIN STAINLESS STEEL

design Paola Pinnavaia



10 YEARS WARRANTY

MATERIAL:

Horizontal collectors in satin stainless steel with Ø of 38 mm.
Vertical heating elements in satin stainless steel with Ø of 25 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

AWARD

D COME DESIGN

ACCESSORIES



Elegant corner dx with
thermostatic head satin
valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990320204

Multilayer connection Ø 16 x2
Art. Nr. 5991990320202



Elegant manual reverse
satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320207


Multilayer connection Ø 16 x2
Art. Nr. 5991990320206




Elegant manual square
satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16 x2
Art. Nr. 5991990320208



Measures for valves type
Cordivari Elegant Corner
with thermostatic head




Measures for Elegant rever-
se manual valve




Pipe covering kit for
satin valves

Art. Nr. 5103000000045

Accessories and spare parts- see from page 366.

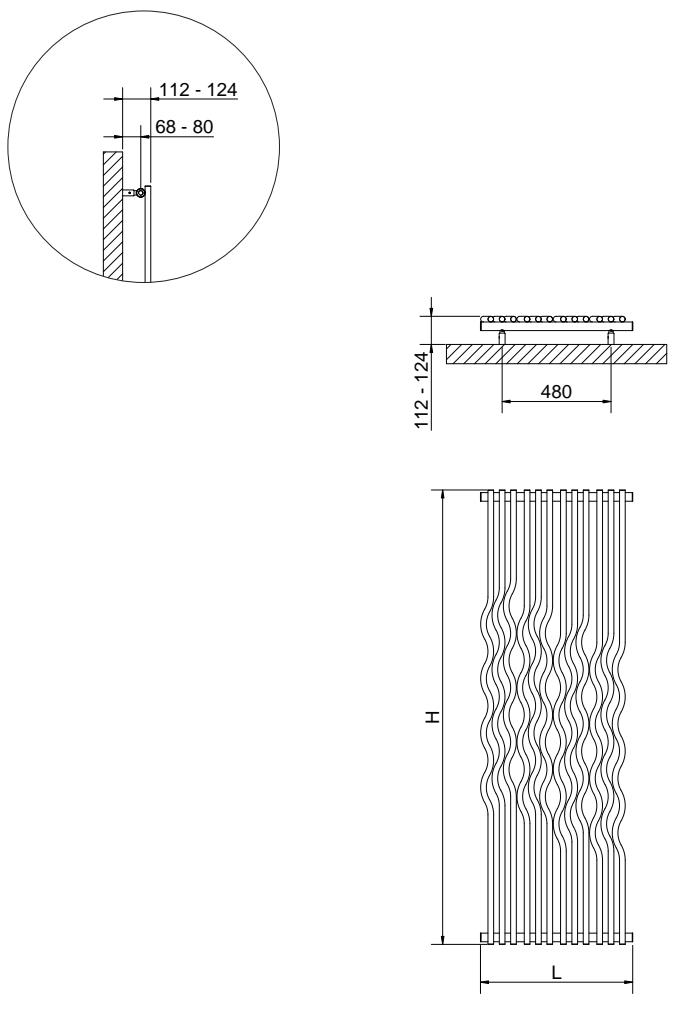

Standard connections

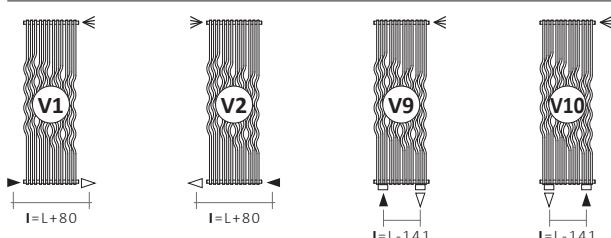

Always specify the kind of connection needed when ordering (V1- V2 and V9- V10).

Legend = In Out Airvent **H** Height Pipe Centres **L** Width Connection

RIO® SATIN STAINLESS STEEL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|---------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3620750130001 | V1 | 2000 | 671 | 751 | 26 | 2,38 | 16,6 | 863 | 456 | 1,2476 |
| 3620750000007 | V2 | 2000 | 671 | 751 | 26 | 2,38 | 16,6 | 863 | 456 | 1,2476 |
| 3620750000003 | V9 | 2000 | 671 | 530 | 26 | 2,38 | 16,6 | 863 | 456 | 1,2476 |
| 3620750000002 | V10 | 2000 | 671 | 530 | 26 | 2,38 | 16,6 | 863 | 456 | 1,2476 |

Pipe Centres refers to the radiator valves Elegant Cordivari.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



RIO®

POLISHED STAINLESS STEEL

design Paola Pinnavaia



10 YEARS WARRANTY

MATERIAL:

Horizontal collectors in polished stainless steel with ϕ of 38 mm.
Vertical heating elements in polished stainless steel with ϕ of 25 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



EN 442-1

P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

AWARD

D COME DESIGN

ACCESSORIES



Elegant corner dx with
thermostatic head polished
valve kit

Copper connection ϕ 12/14/15
Art. Nr. 5991990301079

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301077



Elegant reverse manual
polished valve kit

Copper connection ϕ 12/14/15
Art. Nr. 5991990301082


Multilayer connection ϕ 16 x2
Art. Nr. 5991990301081




Elegant square manual
polished valve kit

Copper connection ϕ 12/14/15
Art. Nr. 5991990301084

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301083



Measures for valves type
Cordivari Elegant Corner
with thermostatic head







Measures for Elegant rever-
se manual valve




Pipe covering kit for pol-
ished valves

Art. Nr. 5103000000044

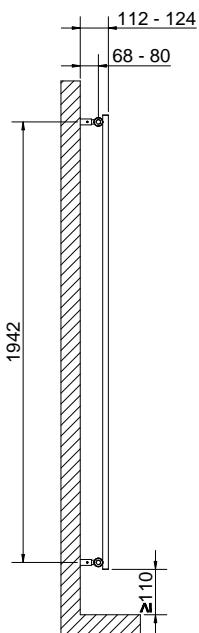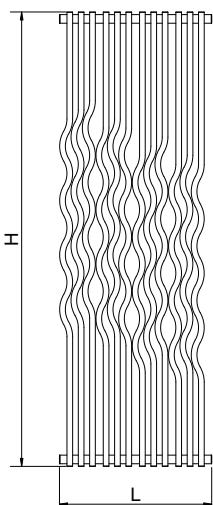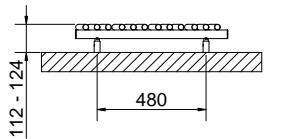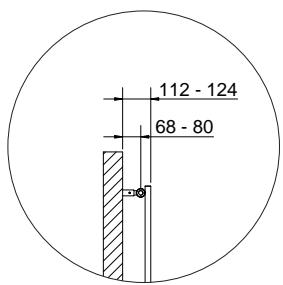

Standard connections

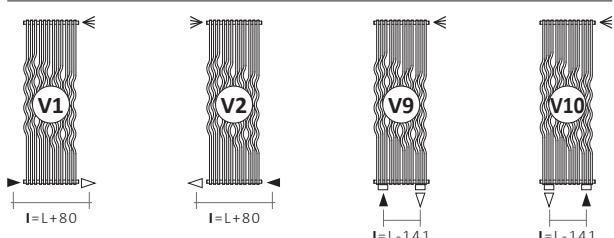

Always specify the kind of connection needed when ordering (V1- V2 and V9- V10).

Legend = In Out Airvent Height Pipe Centres Width Connection

RIO® POLISHED STAINLESS STEEL

| Art. Nr. | Variant | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|--------------|---------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 362075040001 | V1 | 2000 | 671 | 751 | 26 | 2,38 | 16,6 | 807 | 424 | 1,2581 |
| 362075000001 | V2 | 2000 | 671 | 751 | 26 | 2,38 | 16,6 | 807 | 424 | 1,2581 |
| 362075000004 | V9 | 2000 | 671 | 530 | 26 | 2,38 | 16,6 | 807 | 424 | 1,2581 |
| 362075000005 | V10 | 2000 | 671 | 530 | 26 | 2,38 | 16,6 | 807 | 424 | 1,2581 |

Pipe Centres refers to the radiator valves Elegant Cordivari.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



STRADIVARI HORIZONTAL

SATIN STAINLESS STEEL

design Luca Scacchetti



page 38

**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in satin stainless steel.
Horizontal heating elements in satin stainless steel.

FIXING KIT:

Brackets, airvent, tappo, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

AWARD

CASANOVA ROOM NUMBER 3

ACCESSORIES



Elegant manual square satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16 x2
Art. Nr. 5991990320208



Elegant square with
thermostatic head satin
valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320197

Multilayer connection Ø 16 x2
Art. Nr. 5991990320196



Elegant corner dx with
thermostatic head satin
valve kit


Copper connection Ø 12/14/15
Art. Nr. 5991990320204

Multilayer connection Ø 16 x2
Art. Nr. 5991990320202



Straight hanger satin
stainless steel
(L= 420 mm)


Art. Nr. 5991990010159



Measures for Elegant square manual valve









STAINLESS STEEL
MADE



Pipe covering kit for
satin valves

Art. Nr. 5103000000045

Accessories and spare parts - see from page 366.

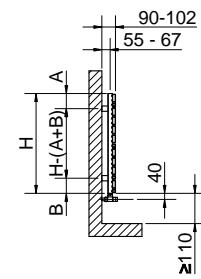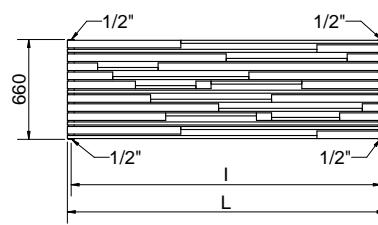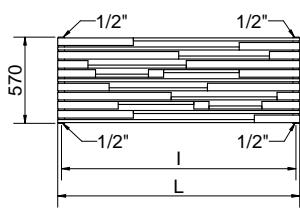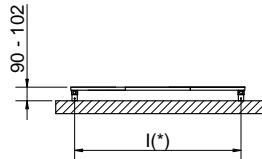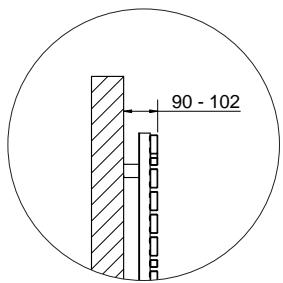

(*) The fixing kit has the same pipe centre (l) as the radiator

| H [mm] | A [mm] | B [mm] |
|------------|--------|--------|
| 420 | 50 | 50 |
| 570 | 100 | 100 |
| 660 | 100 | 100 |

STRADIVARI HORIZONTAL - SATIN STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|------------|--------|--------------|------------|-------------------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m ²] | [lt] | Δt = 50°C | | |
| 3620760450006 | 420 | 1150 | 1100 | 14 | 1,80 | 6 | 347 | 187 | 1,2100 |
| 3620760450003 | 570 | 1600 | 1550 | 25 | 2,40 | 9,3 | 656 | 355 | 1,2000 |
| 3620760450004 | 660 | 2100 | 2050 | 37 | 3,14 | 15 | 997 | 540 | 1,2000 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



STRADIVARI VERTICAL

SATIN STAINLESS STEEL

design Luca Scacchetti



**10 YEARS
WARRANTY**

MATERIAL:

Horizontal collectors in satin stainless steel.
Vertical heating elements in satin stainless steel.

FIXING KIT:

Brackets, airvent, tappo, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

AWARD

CASANOVA ROOM NUMBER 3

ACCESSORIES



Elegant manual square satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16 x2
Art. Nr. 5991990320208



Elegant corner sx with
thermostatic head satin
valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990320205


Multilayer connection Ø 16 x2
Art. Nr. 5991990320203



Elegant corner dx with
thermostatic head satin
valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990320204

Multilayer connection Ø 16 x2
Art. Nr. 5991990320202



Measures for Elegant square manual valve



Elegant square with
thermostatic head satin
valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320197






Multilayer connection Ø 16 x2
Art. Nr. 5991990320196



Pipe covering kit for
satin valves

Art. Nr. 5103000000045

Accessories and spare parts - see from page 366.

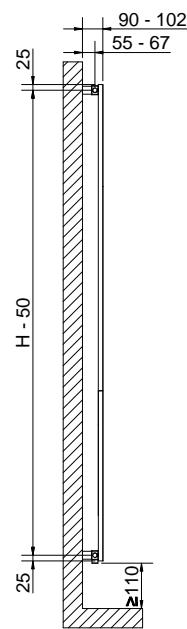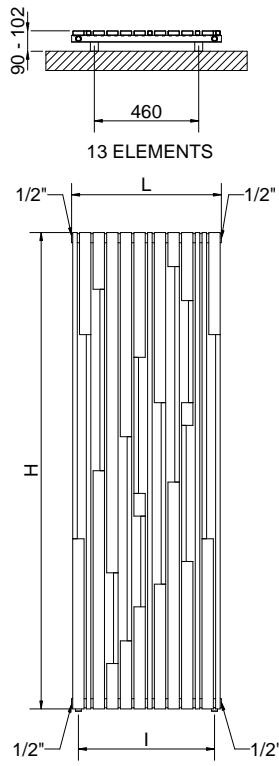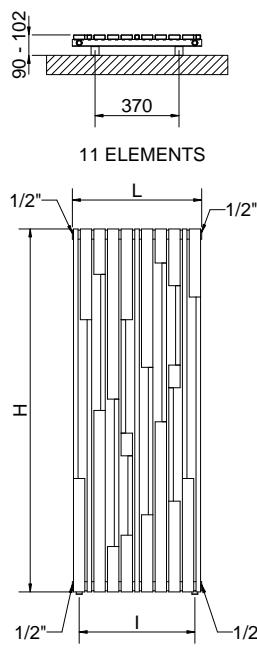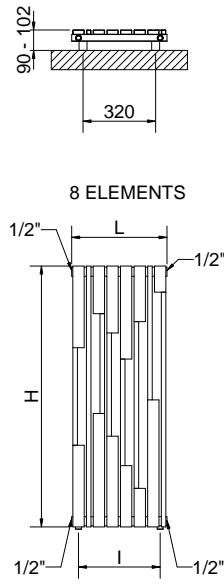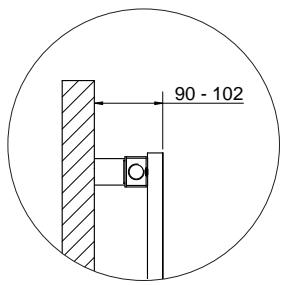

STRADIVARI VERTICAL - SATIN STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|-------------------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m ²] | [lt] | Δt = 50°C | | |
| 3620760450005 | 1150 | 420 | 360 | 14 | 1,80 | 6 | 378 | 196 | 1,2900 |
| 3620760450001 | 1600 | 570 | 510 | 25 | 2,40 | 9,3 | 713 | 365 | 1,3103 |
| 3620760450002 | 2100 | 660 | 600 | 37 | 3,14 | 15 | 1084 | 558 | 1,3000 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



KELLY 18

POLISHED STAINLESS STEEL



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel with \varnothing of 18 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301075



Elegant square manual polished valve kit


Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083





Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Measures for valves type
Cordivari Elegant Square
with thermostatic head and
pipe centres 50 mm

Accessories and spare parts- see from page 366.

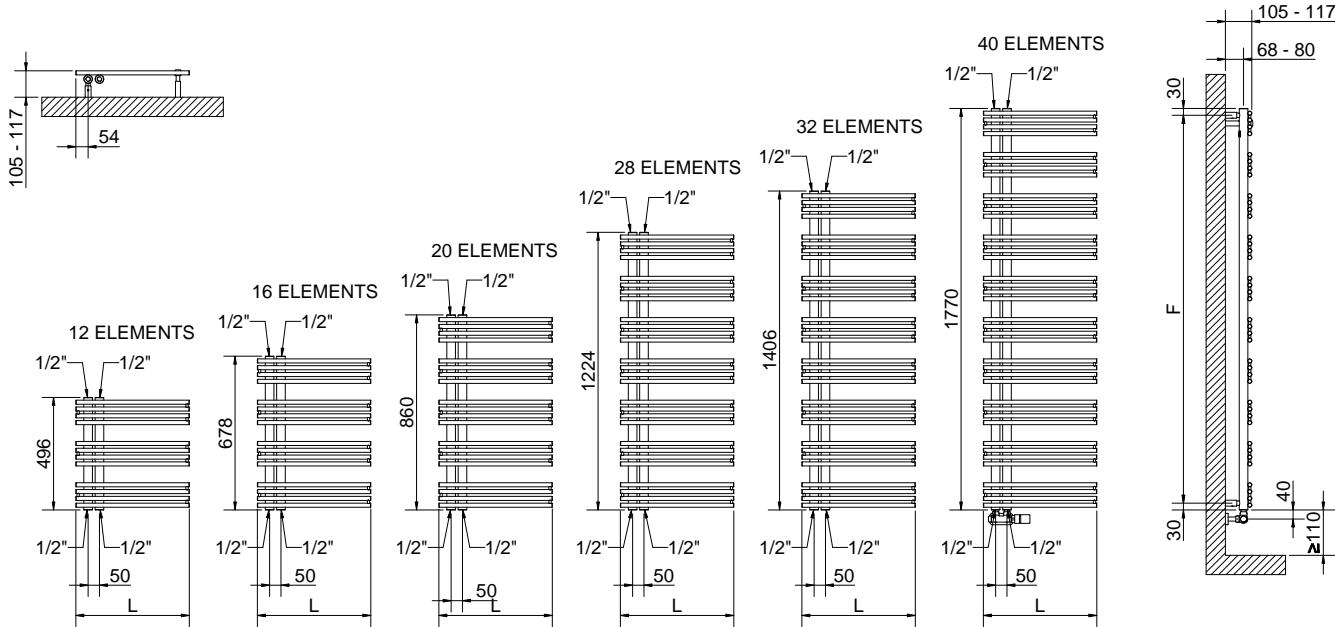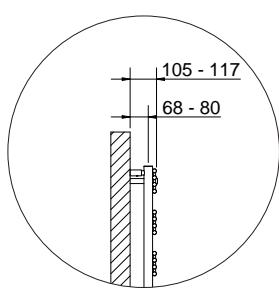

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

KELLY 18 POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Fixing kit centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|-------|--------------|--------------------|------------|---------|---------------|---------------------|-----------|------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| 3551780400104 | 500 | 400 | 50 | 436 | 3,8 | 0,39 | 1,87 | 166 | 90 | 1,1996 |
| 3551780400099 | | 500 | 50 | 436 | 4,4 | 0,45 | 2,10 | 208 | 113 | 1,1996 |
| 3551780400105 | 680 | 400 | 50 | 618 | 5,01 | 0,52 | 2,52 | 214 | 116 | 1,1996 |
| 3551780400107 | | 500 | 50 | 618 | 5,81 | 0,61 | 2,83 | 259 | 139 | 1,2117 |
| 3551780400106 | 860 | 400 | 50 | 800 | 6,3 | 0,65 | 3,18 | 283 | 152 | 1,2118 |
| 3551780400100 | | 500 | 50 | 800 | 7,3 | 0,77 | 3,60 | 323 | 168 | 1,2771 |
| 3551780400101 | 1224 | 500 | 50 | 1164 | 10,27 | 1,08 | 5,03 | 434 | 225 | 1,2881 |
| 3551780400111 | | 600 | 50 | 1164 | 11,66 | 1,24 | 5,56 | 504 | 261 | 1,2851 |
| 3551780400102 | 1406 | 500 | 50 | 1346 | 11,76 | 1,24 | 5,76 | 489 | 256 | 1,2692 |
| 3551780400112 | | 600 | 50 | 1346 | 13,3 | 1,42 | 6,30 | 584 | 303 | 1,2862 |
| 3551780400103 | 1770 | 500 | 50 | 1710 | 14,75 | 1,55 | 7,20 | 624 | 321 | 1,2990 |
| 3551780400113 | | 600 | 50 | 1710 | 16,7 | 1,78 | 7,90 | 726 | 377 | 1,2832 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



KELLY 18 ELECTRIC

POLISHED STAINLESS STEEL



EUROPEAN WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with ϕ of 38 mm.
Horizontal heating elements in polished stainless steel with ϕ of 18 mm.
Glycolate water.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

PRODUCT CERTIFICATES



Electrical resistors: CLASS 1


Minimum class protection: IP 44

Seasonal energy efficiency η_s : $\geq 38\%$

Wire Length: 1200 mm with Schuko plug

Electrical only: with digital thermostat and remote control

HOW TO PLACE ELECTRIC RADIATORS

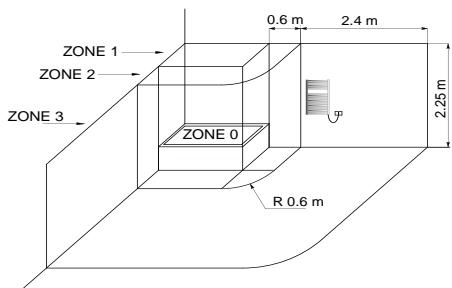

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

INCLUDED





Remote control for top digital thermostat


MAIN FEATURES AND FUNCTIONS:

CRONO: function of chrono-thermostat with daily or weekly programming with two temperature levels (Comfort/Eco)
COMFORT: Possibility of setting your own desired temperature for time slot for higher comfort
ECO: Possibility of keeping the temperature constant with lower power consumption. Useful for energy saving when the room is not occupied.
ANTI-FREEZE: Useful if the room is not used for long periods
TIMER/FORCED MARCH: Useful to heat rapidly the room and dry towels thanks to 2h of forced march at max. Power.
CHILD SAFETY LOCK: special purpose lock of the display panel so to avoid any accidental alteration
REMOTE CONTROL: The digital thermostat is equipped with an infrared remote control, useful to manage all the aforementioned functions.




Accessories and spare parts - see from page 366.

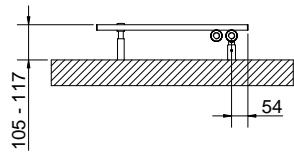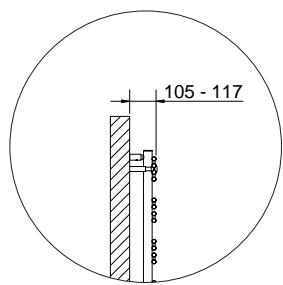

28 ELEMENTS

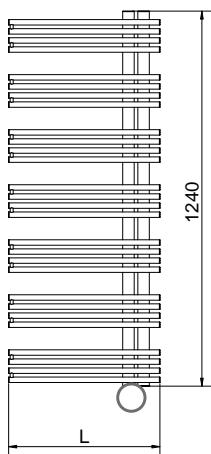

32 ELEMENTS

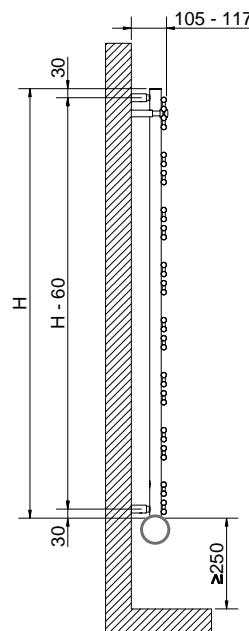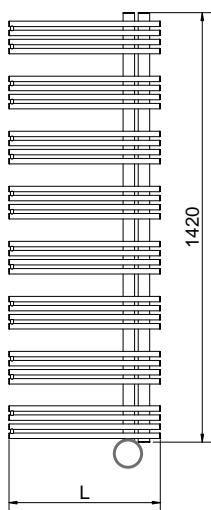


TOP DIGITAL THERMOSTAT DX

The general footprint has to be calculated considering the thermostat height.

KELLY 18 ELECTRIC - POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Thermal output | Weight |
|---|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| KIT- Top digital thermostat DX (right) | | | | |
| 3581780500001 | 1240 | 500 | 500 | 15 |
| 3581780500002 | 1420 | 500 | 600 | 17 |



TOP DIGITAL THERMOSTAT SX

The general footprint has to be calculated considering the thermostat height.

KELLY 18 ELECTRIC - POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Thermal output | Weight |
|--|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| KIT- Top digital thermostat SX (left) | | | | |
| 3581780500013 | 1240 | 500 | 500 | 15 |
| 3581780500014 | 1420 | 500 | 600 | 17 |



KELLY 38

POLISHED STAINLESS STEEL



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with ϕ of 38 mm.
Horizontal heating elements in polished stainless steel with ϕ of 38 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990301076

Multilayer connection Ø 16 x2
Art. Nr. 5991990301075



Elegant square manual polished valve kit


Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083









Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

Accessories and spare parts- see from page 366.

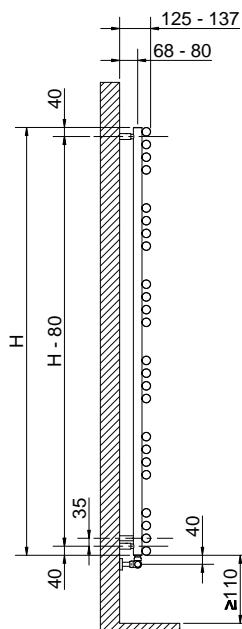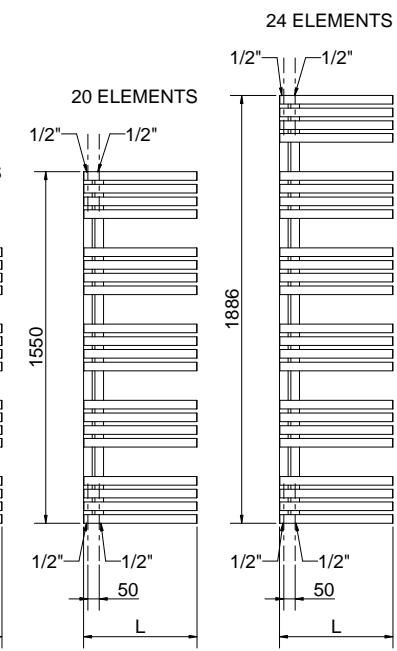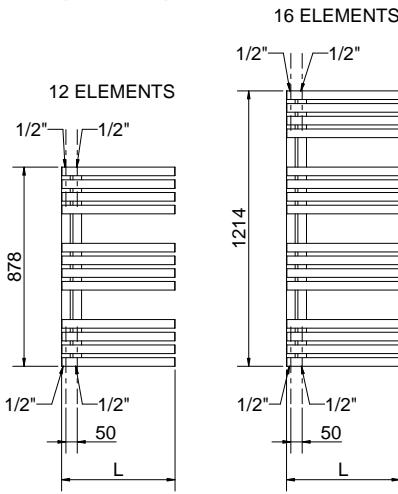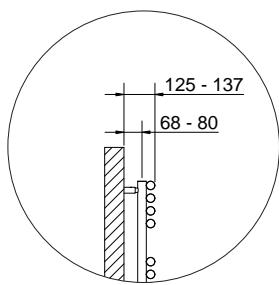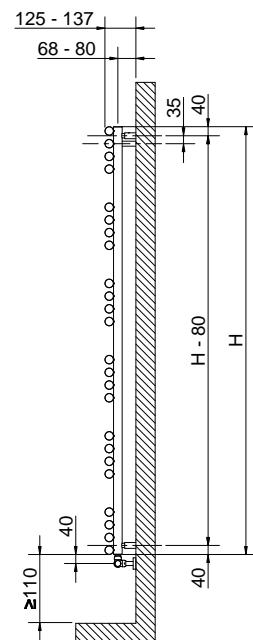SIDE VIEW
RIGHT VERSIONSIDE VIEW
LEFT VERSION**KELLY 38** POLISHED STAINLESS STEEL

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres l [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|---------------|------------------|-----------------|------------------------|--------------------|------------------------------|-----------------------|---------------------|-----------|------------|
| | | | | | | | Δt = 50°C | Δt = 30°C | |
| 3551780400120 | 878 | 500 | 50 | 9,9 | 0,926 | 7,3 | 277 | 139 | 1,3520 |
| 3551780400124 | | 600 | 50 | 11,4 | 1,069 | 8,5 | 340 | 178 | 1,2640 |
| 3551780400121 | 1214 | 500 | 50 | 13,2 | 1,245 | 10,2 | 373 | 191 | 1,3130 |
| 3551780400125 | | 600 | 50 | 15 | 1,436 | 11,4 | 418 | 219 | 1,2642 |
| 3551780400122 | 1550 | 500 | 50 | 16,4 | 1,564 | 12,6 | 515 | 271 | 1,2598 |
| 3551780400126 | | 600 | 50 | 18,7 | 1,803 | 15 | 586 | 308 | 1,2563 |
| 3551780400123 | 1886 | 500 | 50 | 19,7 | 1,883 | 15,1 | 611 | 322 | 1,2550 |
| 3551780400127 | | 600 | 50 | 22,2 | 2,169 | 17,5 | 704 | 368 | 1,2676 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



KELLY 38

SATIN STAINLESS STEEL



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in satin stainless steel with \varnothing of 38 mm.
Horizontal heating elements in satin stainless steel with \varnothing of 38 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square satin valve
kit pipe centres 50 mm
with thermostatic head
- right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990320201

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990320200



Elegant manual square
satin valve


Copper connection \varnothing 12/14/15
Art. Nr. 5991990320209

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990320208









Pipe covering kit for Pipe
Centres 50 mm - valves
satin

Art. Nr. 5103000000058



Measures for valves type
Cordivari Elegant Square
with thermostatic head and
pipe centres 50 mm

Accessories and spare parts- see from page 366.

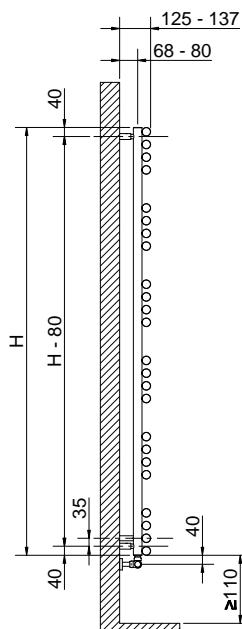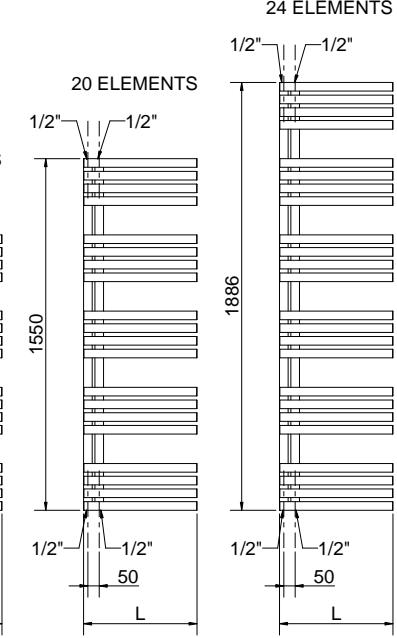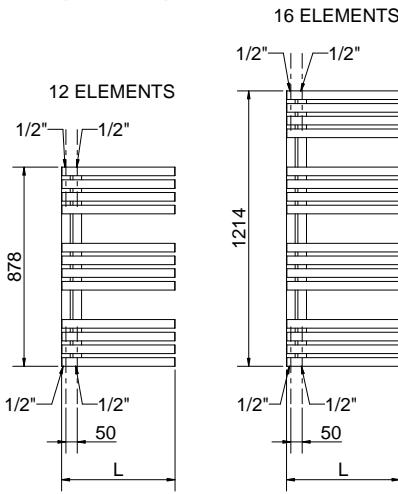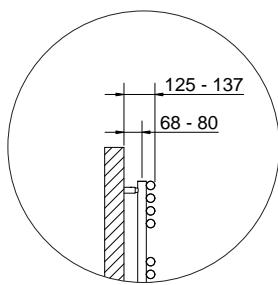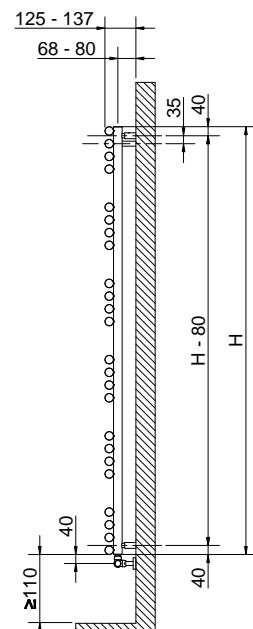SIDE VIEW
RIGHT VERSIONSIDE VIEW
LEFT VERSION**KELLY 38** SATIN STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|-------------------|---------------|-------------------------------|-------------------------------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m ²] | [l] | $\Delta t = 50^\circ\text{C}$ | $\Delta t = 30^\circ\text{C}$ | |
| 3551780500120 | 878 | 500 | 50 | 9,9 | 0,926 | 7,3 | 288 | 145 | 1,3616 |
| 3551780500124 | | 600 | 50 | 11,4 | 1,069 | 8,5 | 354 | 185 | 1,2741 |
| 3551780500121 | 1214 | 500 | 50 | 13,2 | 1,245 | 10,2 | 388 | 199 | 1,3232 |
| 3551780500125 | | 600 | 50 | 15 | 1,436 | 11,4 | 435 | 228 | 1,2744 |
| 3551780500122 | 1550 | 500 | 50 | 16,4 | 1,564 | 12,6 | 536 | 282 | 1,2699 |
| 3551780500126 | | 600 | 50 | 18,7 | 1,803 | 15 | 609 | 320 | 1,2665 |
| 3551780500123 | 1886 | 500 | 50 | 19,7 | 1,883 | 15,1 | 635 | 335 | 1,2650 |
| 3551780500127 | | 600 | 50 | 22,2 | 2,169 | 17,5 | 732 | 383 | 1,2776 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt /50)ⁿ



BABYLA

SATIN STAINLESS STEEL

design Mariano Moroni



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in satin stainless steel with ϕ of 38 mm.
Horizontal heating elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"


KIT ELITE SATIN STAINLESS STEEL



KIT ELITE
satin
(only for Babyla H 1500)

Art. Nr.
5102000000104


N° 1 mirror



N° 1 shelf for books

(*) Elegant square
satin valve kit pipe
centres 50 mm
with thermostatic
head

N° 2 hanger clothes
satin stainless steel
 ϕ 20 mm



N° 3 shelves
(2 on the left,
1 on the right)

N° 1 antenna for
hanging clothes

(*) Either when buying the "Elite kit" or the single valve, always specify in the order, the connection needed: copper or multilayer. See page 367.

ACCESSORIES



Elegant square satin
valve kit pipe centres 50
mm with thermostatic
head - right

Copper connection ϕ 12/14/15
Art. Nr. 5991990320201

Multilayer connection ϕ 16 x2
Art. Nr. 5991990320200



Elegant manual square
satin valve


Copper connection ϕ 12/14/15
Art. Nr. 5991990320209

Multilayer connection ϕ 16 x2
Art. Nr. 5991990320208



Kit 2 hooks satin stain-
less steel

Art. Nr. 5991990010224





Measures for valves type
Cordivari Elegant Square
with thermostatic head and
pipe centres 50 mm



Pipe covering kit for Pipe
Centres 50 mm - valves
satin

Art. Nr. 5103000000058

Accessories and spare parts- see from page 366.

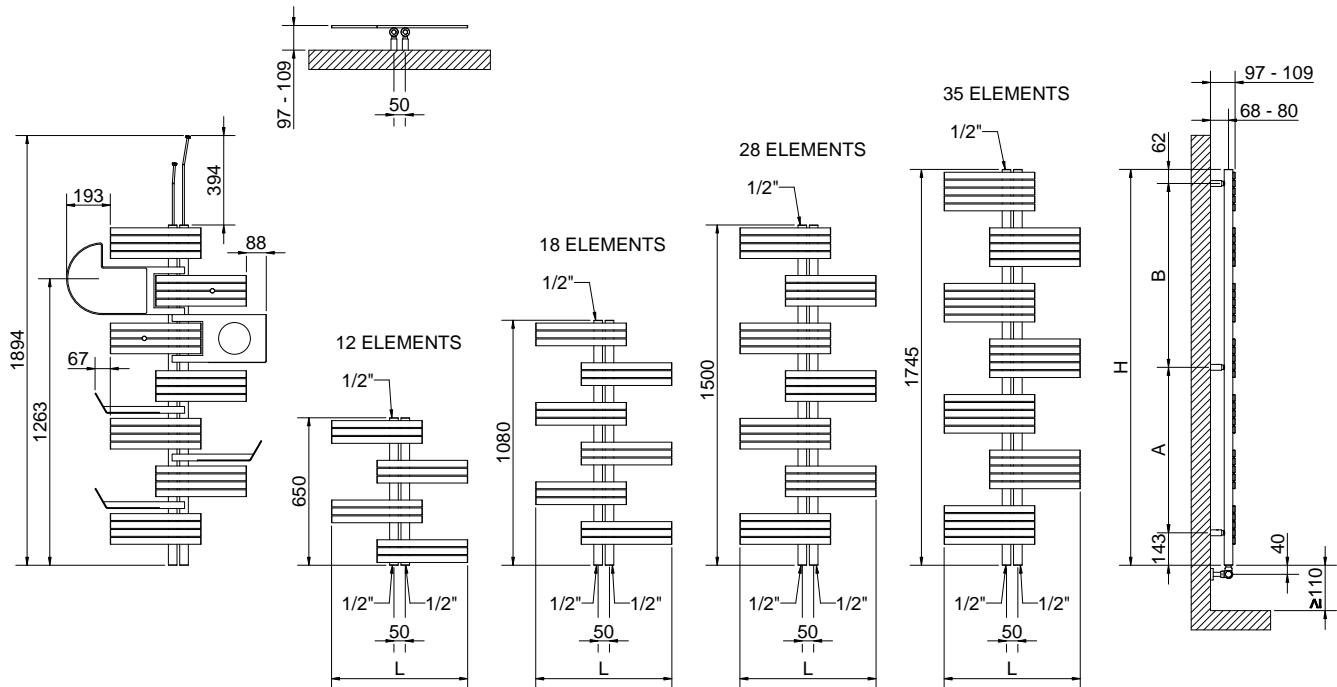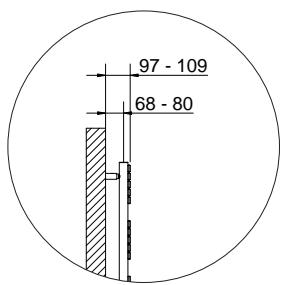

Dimensions and volume of the satin elite kit (only for the 1500 mm height version).



| H [mm] | A [mm] | B [mm] |
|-------------|--------|--------|
| 650 | 445 | - |
| 1080 | 397 | 478 |
| 1500 | 607 | 688 |
| 1745 | 731 | 810 |

BABYLA SATIN STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Fixing kit centres | Dry Weight | Surface | Thermal output Watt | | Exponent n | |
|---------------|-------------|--------|--------------|--------------------|------------|---------|---------------------|-----------|------------|--------|
| | H [mm] | L [mm] | I [mm] | F [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551730130004 | 650 | 600 | 50 | 445 | 5,5 | 0,51 | 2,3 | 167 | 89 | 1,2235 |
| 3551730130001 | 1080 | 600 | 50 | 875 | 8,8 | 0,83 | 3,2 | 250 | 133 | 1,2351 |
| 3551730130002 | 1500 | 600 | 50 | 1275 | 13,3 | 1,25 | 4,5 | 357 | 187 | 1,2686 |
| 3551730130003 | 1745 | 600 | 50 | 1540 | 16,9 | 1,53 | 6,0 | 432 | 223 | 1,2904 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



BABYLA

POLISHED STAINLESS STEEL

design Mariano Moroni



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301075



Elegant square manual polished valve kit


Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083



Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223





Measures for valves type
Cordivari Elegant Square
with thermostatic head and
pipe centres 50 mm




Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057


Accessories and spare parts- see from page 366.

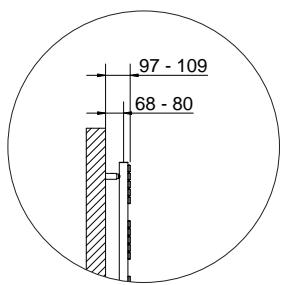


12 ELEMENTS

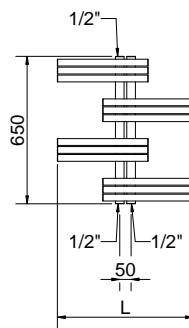



18 ELEMENTS

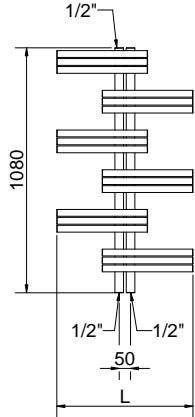

28 ELEMENTS

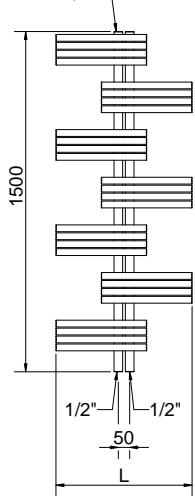

35 ELEMENTS

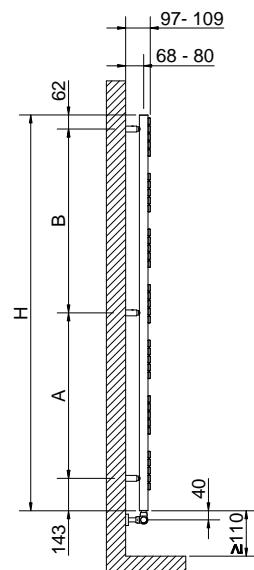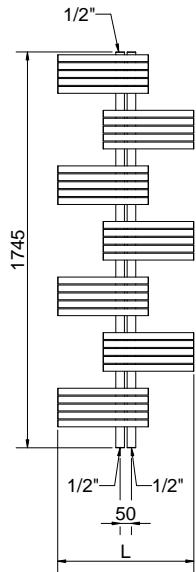

| H [mm] | A [mm] | B [mm] |
|-------------|--------|--------|
| 650 | 445 | - |
| 1080 | 397 | 478 |
| 1500 | 607 | 688 |
| 1745 | 731 | 810 |

BABYLA POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Fixing kit centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|--------------------|------------|-------------------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | F [mm] | [Kg] | [m ²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551730130014 | 650 | 600 | 50 | 445 | 5,5 | 0,51 | 2,3 | 156 | 83 | 1,2246 |
| 3551730130011 | 1080 | 600 | 50 | 875 | 9,2 | 0,83 | 3,4 | 233 | 124 | 1,2351 |
| 3551730130012 | 1500 | 600 | 50 | 1275 | 13,3 | 1,25 | 4,5 | 333 | 174 | 1,2687 |
| 3551730130013 | 1745 | 600 | 50 | 1540 | 16,9 | 1,53 | 6,0 | 395 | 204 | 1,2904 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



BABYLA

GOLD POLISHED STAINLESS STEEL

design Mariano Moroni



page 52

**5 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

ACCESSORIES



Elegant square gold polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301089

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301091



Elegant square manual polished gold valve kit


Copper connection \varnothing 12/14/15
Art. Nr. 5991990301056

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301055





Pipe covering kit for Pipe Centres 50 mm - valves polished gold

Art. Nr. 5103000000087




Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm


Accessories and spare parts- see from page 366.

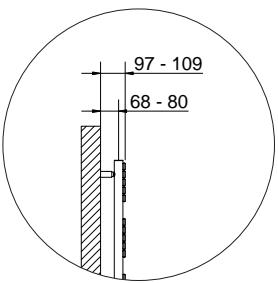


12 ELEMENTS

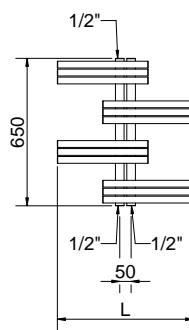



18 ELEMENTS

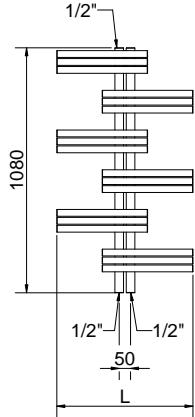

28 ELEMENTS

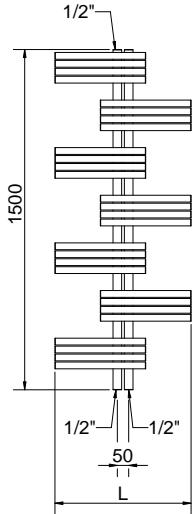

35 ELEMENTS

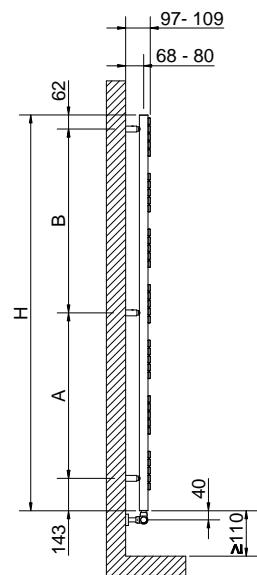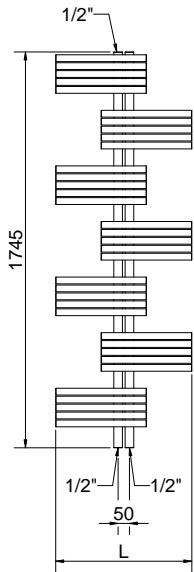

| H [mm] | A [mm] | B [mm] |
|-------------|--------|--------|
| 650 | 445 | - |
| 1080 | 397 | 478 |
| 1500 | 607 | 688 |
| 1745 | 731 | 810 |

BABYLA GOLD POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Fixing kit centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|--------------------|------------|-------------------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | F [mm] | [Kg] | [m ²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551730130024 | 650 | 600 | 50 | 445 | 5,5 | 0,51 | 2,3 | 156 | 83 | 1,2246 |
| 3551730130021 | 1080 | 600 | 50 | 875 | 9,2 | 0,83 | 3,4 | 233 | 124 | 1,2351 |
| 3551730130022 | 1500 | 600 | 50 | 1275 | 13,3 | 1,25 | 4,5 | 333 | 174 | 1,2687 |
| 3551730130023 | 1745 | 600 | 50 | 1540 | 16,9 | 1,53 | 6,0 | 395 | 204 | 1,2904 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



CELINE

POLISHED STAINLESS STEEL



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301075



Elegant reverse manual polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301082


Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301081



Elegant square manual polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083





Measures for valves type
Cordivari Elegant Square
with thermostatic head and
pipe centres 50 mm



Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057

Accessories and spare parts- see from page 366.

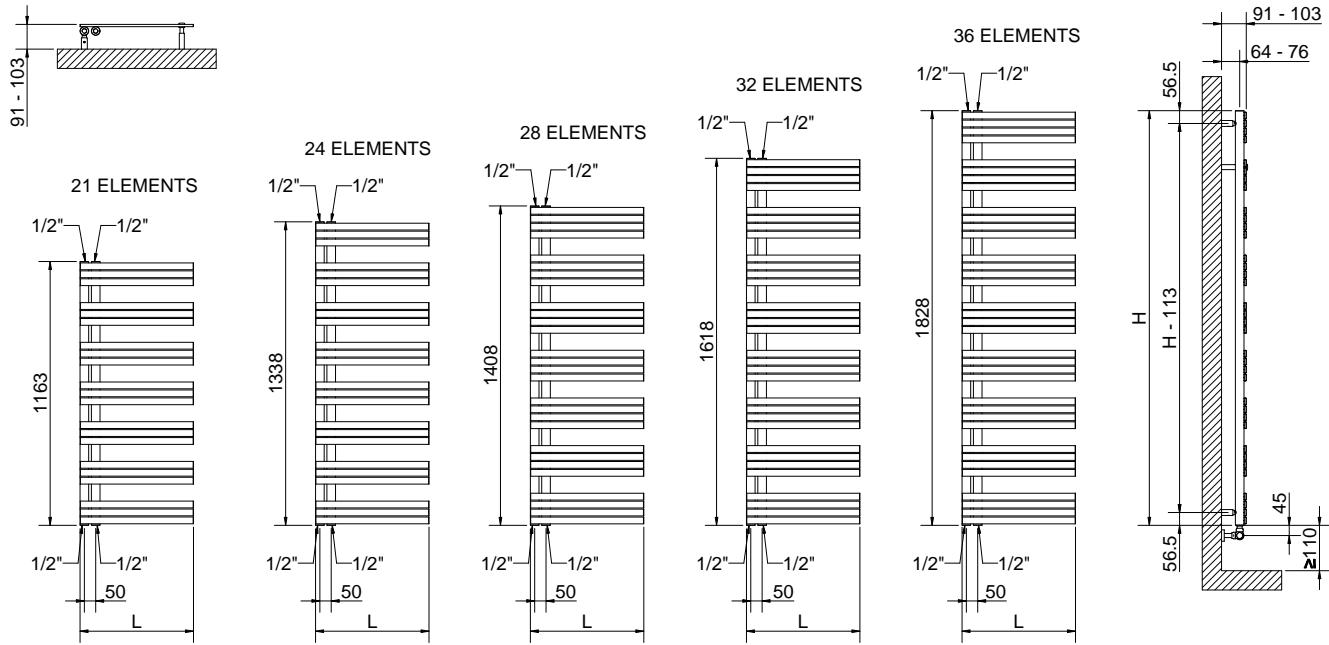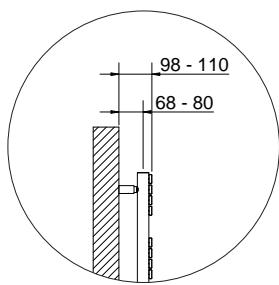

CELINE POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|-------------------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m ²] | [lt] | Δt = 50°C | | |
| 3551730130101 | 1163 | 500 | 50 | 10,0 | 1,118 | 4,5 | 294 | 148 | 1,3462 |
| 3551730130102 | 1338 | 500 | 50 | 11,6 | 1,203 | 5,2 | 337 | 169 | 1,3537 |
| 3551730130105 | 1408 | 500 | 50 | 12,6 | 1,456 | 5,7 | 393 | 197 | 1,3549 |
| 3551730130103 | 1618 | 500 | 50 | 14,8 | 1,666 | 6,5 | 449 | 224 | 1,3592 |
| 3551730130104 | 1828 | 500 | 50 | 16,7 | 1,876 | 7,4 | 506 | 252 | 1,3621 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



CELINE ELECTRIC

POLISHED STAINLESS STEEL



EUROPEAN WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with ϕ of 38 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.
Glycolate water.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

PRODUCT CERTIFICATES



Electrical resistors: CLASS 1


Minimum class protection: IP 44

Seasonal energy efficiency η_s : $\geq 38\%$

Wire Length: 1200 mm with Schuko plug

Electrical only: with digital thermostat and remote control

HOW TO PLACE ELECTRIC RADIATORS

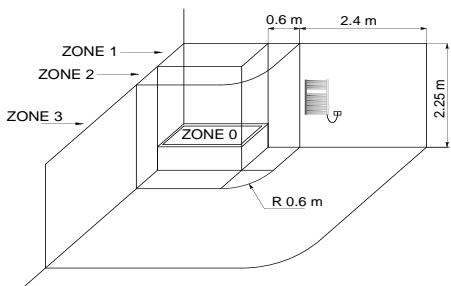

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.




The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.


INCLUDED

| | | |
|--|--|---|
| | Remote control for top digital thermostat | MAIN FEATURES AND FUNCTIONS: CRONO: function of chrono-thermostat with daily or weekly programming with two temperature levels (Comfort/Eco) COMFORT: Possibility of setting your own desired temperature for time slot for higher comfort ECO: Possibility of keeping the temperature constant with lower power consumption. Useful for energy saving when the room is not occupied. ANTI-FREEZE: Useful if the room is not used for long periods TIMER/FORCED MARCH: Useful to heat rapidly the room and dry towels thanks to 2h of forced march at max. Power. CHILD SAFETY LOCK: special purpose lock of the display panel so to avoid any accidental alteration REMOTE CONTROL: The digital thermostat is equipped with an infrared remote control, useful to manage all the aforementioned functions. |
|--|--|---|


Accessories and spare parts - see from page 366.

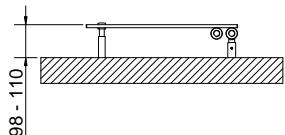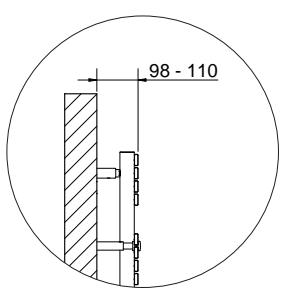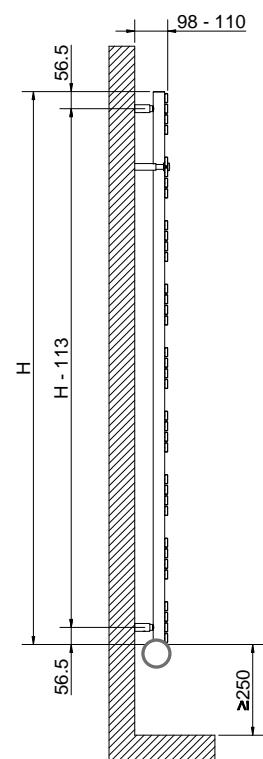



21 ELEMENTS

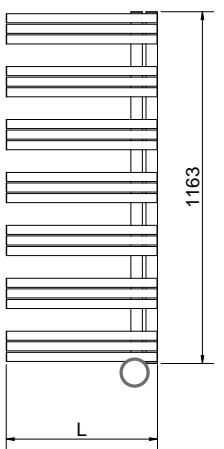

32 ELEMENTS

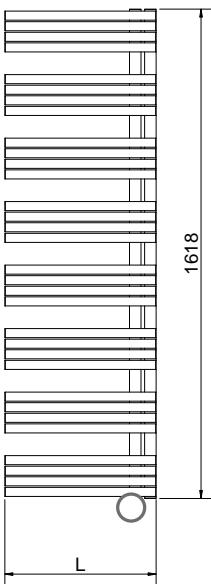

36 ELEMENTS

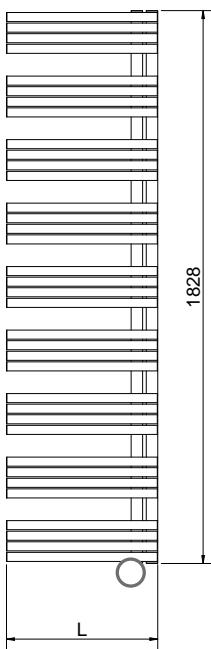


TOP DIGITAL THERMOSTAT DX

The general footprint has to be calculated considering the thermostat height.

CELINE ELECTRIC - POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Thermal output | Weight |
|---|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| KIT- Top digital thermostat DX (right) | | | | |
| 3581730400005 | 1163 | 500 | 400 | 15,5 |
| 3581730400001 | 1618 | 500 | 500 | 21,5 |
| 3581730400002 | 1828 | 500 | 600 | 24,3 |



TOP DIGITAL THERMOSTAT SX

The general footprint has to be calculated considering the thermostat height.

CELINE ELECTRIC - POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Thermal output | Weight |
|--|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| KIT- Top digital thermostat SX (left) | | | | |
| 3581730400006 | 1163 | 500 | 400 | 15,5 |
| 3581730400003 | 1618 | 500 | 500 | 21,5 |
| 3581730400004 | 1828 | 500 | 600 | 24,3 |



FUJKO

POLISHED STAINLESS STEEL



**10 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 30 mm.
Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

ACCESSORIES



Elegant reverse manual polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301082

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301081



Elegant square manual polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084


Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083




Elegant corner dx with thermostatic head polished valve kit

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301079


Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301077



Measures for Elegant reverse manual valve








Measures for valves type Cordivari Elegant Square - Manual



Measures for valves type Cordivari Elegant Corner with thermostatic head

Accessories and spare parts - see from page 366.

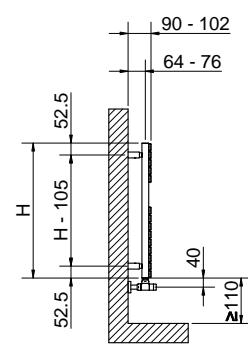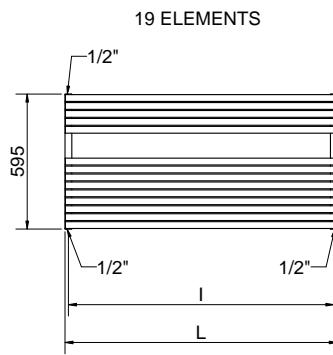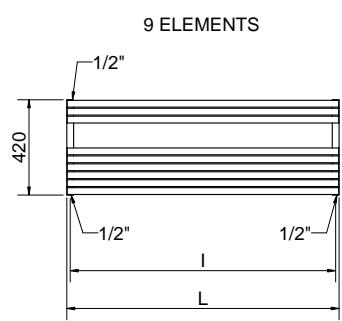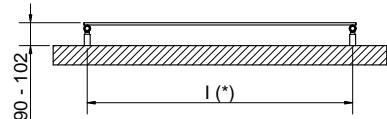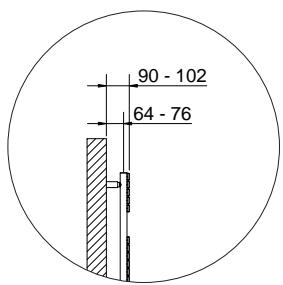

(*) The fixing kit has the same pipe centre (l) as the radiator

FUJKO POLISHED STAINLESS STEEL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|------------|--------|--------------|------------|-------------------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | l [mm] | [Kg] | [m ²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551610131001 | 420 | 1200 | 1170 | 8,5 | 0,9 | 2,7 | 327 | 176 | 1,2082 |
| 3551610131002 | | 1400 | 1370 | 9,8 | 1 | 3,1 | 395 | 211 | 1,2275 |
| 3551610131003 | 595 | 1200 | 1170 | 13,1 | 1,3 | 4,2 | 462 | 255 | 1,1656 |
| 3551610131004 | | 1400 | 1370 | 15,1 | 1,5 | 4,8 | 554 | 302 | 1,1902 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



SFERE TRITTICO

design Simone Micheli



PATENTED

**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES - STANDARD VERSION (Only for standard version):

Valves with thermostatic head
Fittings for copper pipe (\varnothing 12/14/15)
Fittings for multilayer pipe (\varnothing 16 x2)
Ready- to install pipe connection kit

FOR WALL-FIT VERSION THE VALVES MUST BE PURCHASED SEPARATELY.

PRODUCT CERTIFICATES



AWARD



PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

P. max: 5 bar

T. max: 110° C

Available for central heating systems



Connections: n° 2 x G 1/2" - n° 1 x G 1/2"



ACCESSORIES





Accessories and spare parts- see from page 371.

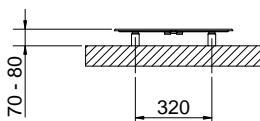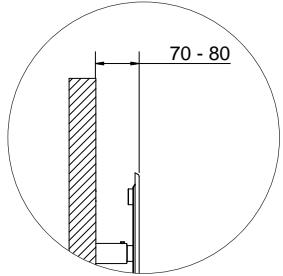


BUILT-IN CONNECTIONS FOR SFERE TRITTICO




TUTORIAL
INSTALLING
THE CONNECTION KIT

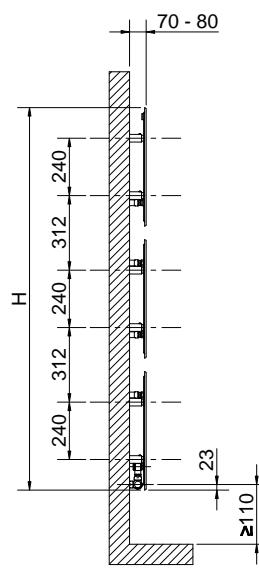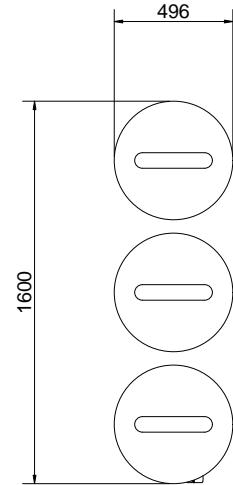

STANDARD
VERSION

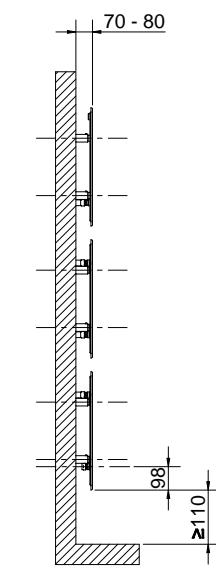

WALL-FIT VALVES
VERSION

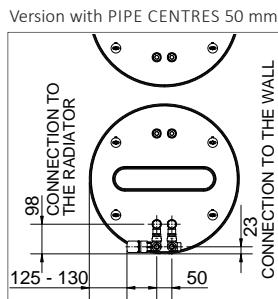

SFERE TRITTICO COMPLETE WITH WALL-FIT HYDRAULIC CONNECTION

| Art. Nr. | Diameter | Pipe Centres | A | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n | |
|-----------------------------|---------------|--------------|------|------------|---------|---------------|---------------------|-----------|------------|-------|
| | D [mm] | I [mm] | [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | | |
| STANDARD VERSION | 3540806100221 | 496 | 50 | 24 | 24,3 | 1,2 | 0,9 | 582 | 316 | 1,195 |
| VERSION FOR WALL-FIT VALVES | 3540806100226 | 496 | 50 | 93 | 24,3 | 1,2 | 0,9 | 582 | 316 | 1,195 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

Art. Nr. of the standard version, is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**; valves to be ordered separately.

SFERE TRITTICO WITHOUT WALL-FIT HYDRAULIC CONNECTION

| Art. Nr. | Diameter | Pipe Centres | A | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n | |
|-----------------------------|---------------|--------------|------|------------|---------|---------------|---------------------|-----------|------------|-------|
| | D [mm] | I [mm] | [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | | |
| STANDARD VERSION | 3540806100227 | 496 | 50 | 24 | 24,3 | 1,2 | 0,9 | 582 | 316 | 1,195 |
| VERSION FOR WALL-FIT VALVES | 3540806100228 | 496 | 50 | 93 | 24,3 | 1,2 | 0,9 | 582 | 316 | 1,195 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

Art. Nr. of the standard version, is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**; valves to be ordered separately.

WITH BUILT-IN CONNECTIONS

Art. Nr.

5102001100001

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



SFERE

design Simone Micheli



PATENTED

**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES - STANDARD VERSION (Only for standard version):

Valveand holder

Fittings for copper pipe (\varnothing 12/14/15)

Fittings for multilayer pipe (\varnothing 16 x2)

FOR WALL-FIT VERSION THE VALVES MUST BE PURCHASED SEPARATELY

PRODUCT CERTIFICATES



AWARD




SFERE WITH WALL-FIT VALVES




Wall-fit valves (OPTIONAL)






ACCESSORIES

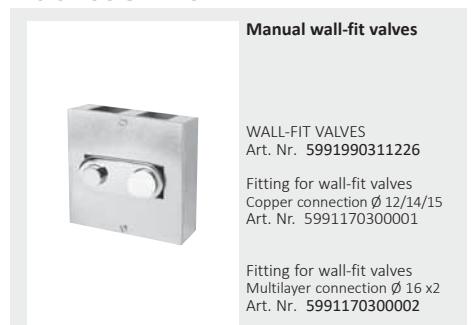

Accessories and spare parts- see from page 371.

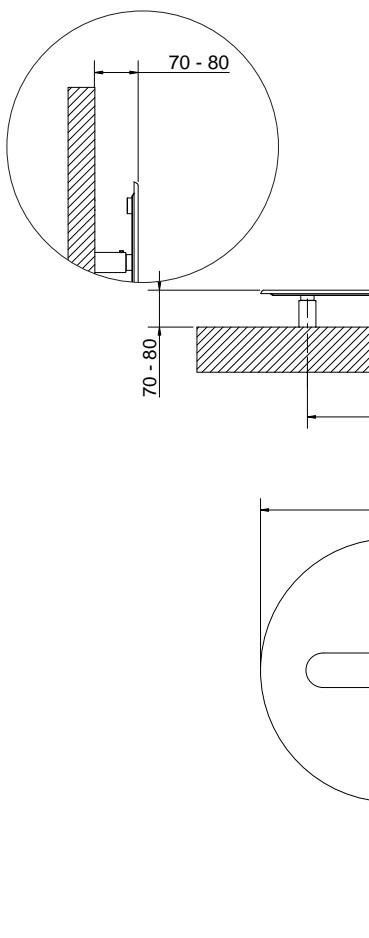

Version with PIPE CENTRES 50 mm

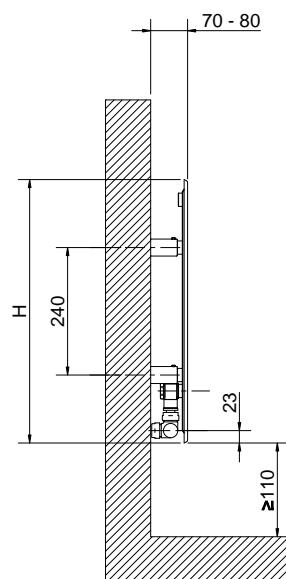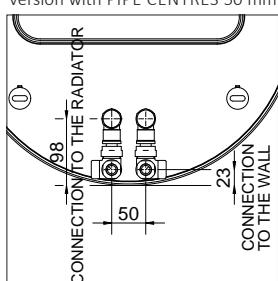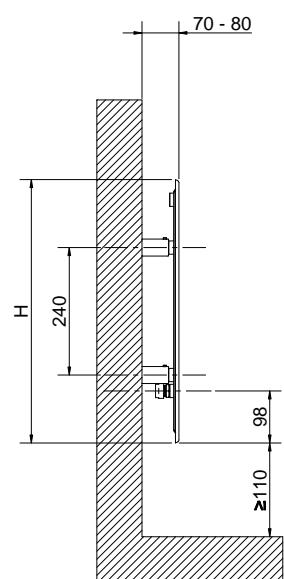STANDARD
VERSIONWALL-FIT VALVES
VERSION

SFERE

| Art. Nr. | Diameter | Pipe Centres | A | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n | |
|-----------------------------|---------------|--------------|------|------------|---------|---------------|---------------------|-----------|------------|--------|
| | D [mm] | I [mm] | [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | | |
| STANDARD VERSION | 3540806100211 | 496 | 50 | 24 | 8,1 | 0,35 | 0,3 | 194 | 105 | 1,1950 |
| VERSION FOR WALL-FIT VALVES | 3540806100212 | 496 | 50 | 24 | 8,1 | 0,35 | 0,3 | 194 | 105 | 1,1950 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

Art. Nr. of the standard version is inclusive of **VALVE AND HOLDER**.

Art. Nr. of the wall fit version includes only **2 X 1/2" CONNECTIONS**- valves to be ordered separately.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



GIULY®

design Mariano Moroni

PATENTED

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves with thermostatic head
Fittings for copper pipe (\varnothing 12/14/15)
Fittings for multilayer pipe (\varnothing 16 x2)



5 YEARS
WARRANTY

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems






Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD




product
design award




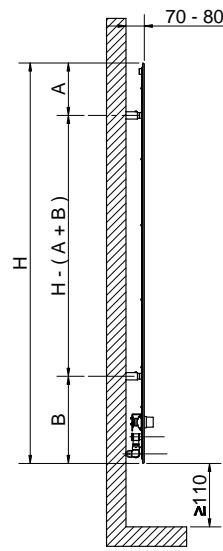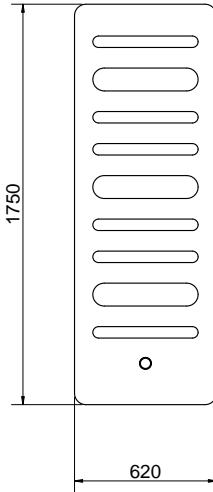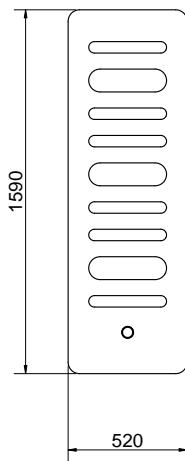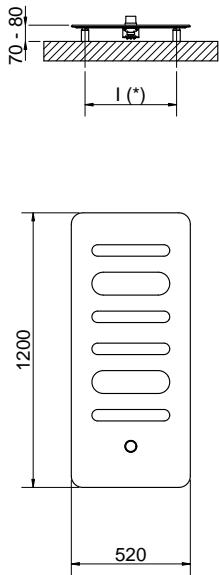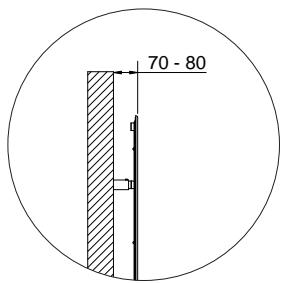

Version with PIPE CENTRES 50 mm

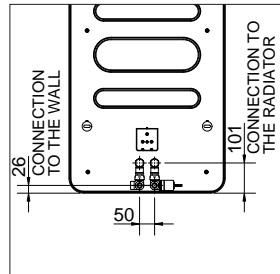

CONNECTION detail

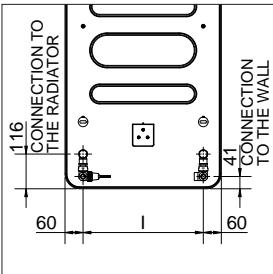

| H [mm] | A [mm] | B [mm] | l (*) [mm] |
|-------------|--------|--------|------------|
| 1200 | 218 | 222 | 400 |
| 1590 | 218 | 362 | 400 |
| 1750 | 229 | 381 | 505 |

GIULY®

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3540806100204 | 1200 | 520 | 400 | 16 | 0,9 | 0,9 | 521 | 274 | 1,2603 |
| 3540806100205 | 1590 | 520 | 400 | 20 | 1,16 | 1,16 | 714 | 377 | 1,2518 |
| 3540806100207 | 1750 | 620 | 500 | 26 | 1,5 | 1,5 | 900 | 467 | 1,2849 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of VALVE, HOLDER AND THERMOSTATIC HEAD, compliant with UNI EN215:2007 and DM 19/02/2017.

GIULY® PIPE CENTRES 50 MM

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3540806100201 | 1200 | 520 | 50 | 16 | 0,9 | 0,9 | 521 | 274 | 1,2603 |
| 3540806100202 | 1590 | 520 | 50 | 20 | 1,16 | 1,16 | 714 | 377 | 1,2518 |
| 3540806100203 | 1750 | 620 | 50 | 26 | 1,5 | 1,5 | 900 | 467 | 1,2849 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of VALVE, HOLDER AND THERMOSTATIC HEAD, compliant with UNI EN215:2007 and DM 19/02/2017.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



GIULY® SL

design Mariano Moroni



PATENTED

5 YEARS
WARRANTY

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves
Fittings for copper pipe (\varnothing 12/14/15)
Fittings for multilayer pipe (\varnothing 16 x2)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems







Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD




product
design award



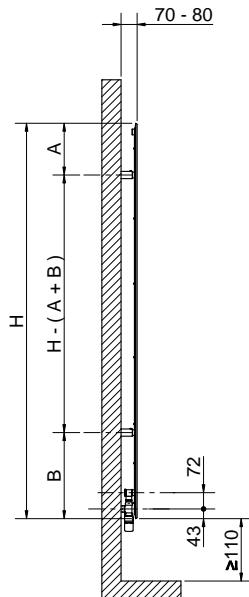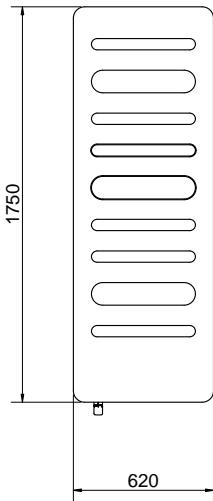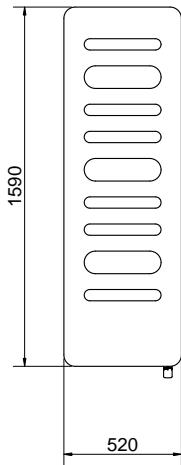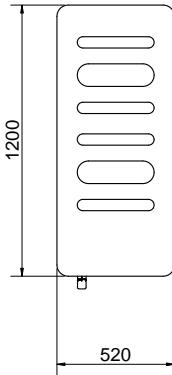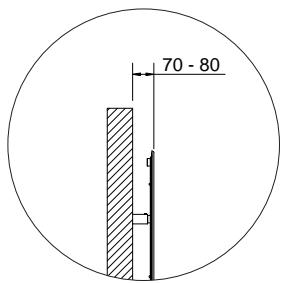

CONNECTION detail

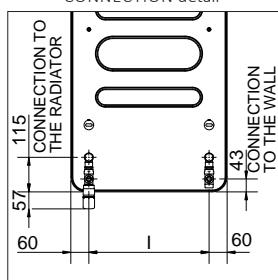

| H [mm] | A [mm] | B [mm] | I (*) [mm] |
|-------------|--------|--------|------------|
| 1200 | 218 | 222 | 400 |
| 1590 | 218 | 362 | 400 |
| 1750 | 229 | 381 | 505 |

GIULY® SL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100222 | 1200 | 520 | 400 | 16 | 0,90 | 0,90 | 521 | 274 | 1,2603 |
| 3540806100223 | 1590 | 520 | 400 | 20 | 1,16 | 1,16 | 714 | 377 | 1,2518 |
| 3540806100225 | 1750 | 620 | 500 | 26 | 1,50 | 1,50 | 900 | 467 | 1,2849 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of **VALVE AND HOLDER**.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



BADGE®

BADGE® CONTROL

design Simone Micheli

3D
TRADEMARK



**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves (STANDARD VERSION)
Valves with thermostatic head (CONTROL VERSION)
Fittings for copper pipe (\varnothing 12/14/15)
Fittings for multilayer pipe (\varnothing 16 x2)

PRODUCT CERTIFICATES



EURONORM
EN 442-1

AWARD

DESIGN PL+
WINNER


**COMFORT & DESIGN
AWARD**

**ŁAZIENKA
AWARD**

**PRIX DU DESIGN IDÉO BAIN
NOMINÉ**

HOW TO PLACE
TOWEL BAR
BADGE VERTICAL
(ACCESSORIES)

| Model | H |
|----------|-----|
| [mm] | |
| 1212x512 | 800 |
| 1755x512 | 870 |

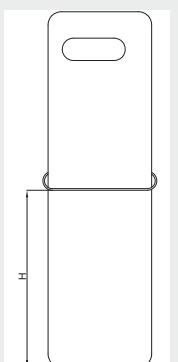

ACCESSORIES



Towel bar in polished
stainless steel (L= 570
mm)

Art. Nr. 5991990310240



Available on vertical
BADGE®

P. max: 5 bar

T. max: 110° C




Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"




STANDARD version






CONNECTION detail

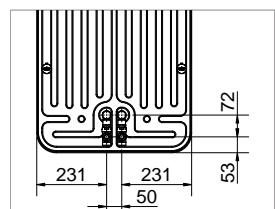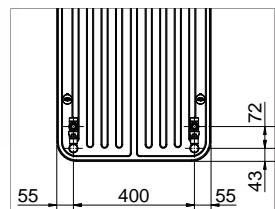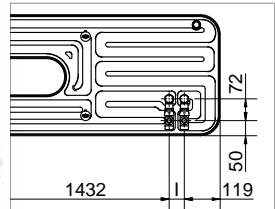

Accessories and spare parts- see from page 366.

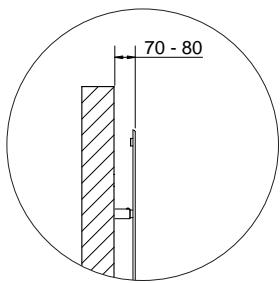

| | H [mm] | A [mm] | B [mm] | I (*) [mm] |
|-------------|--------|--------|--------|------------|
| 404 | 72 | 66 | | 1105 |
| 1212 | 105 | 205 | | 440 |
| 1755 | 278 | 278 | | 446 |

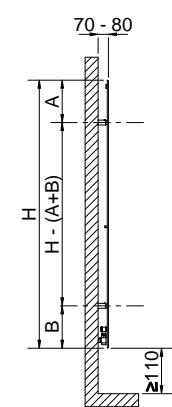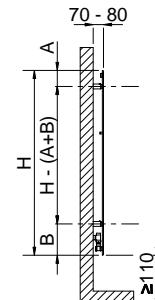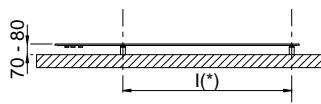




BADGE®

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100021 | 404 | 1604 | 50 | 19 | 0,96 | 1,1 | 572 | 306 | 1,2224 |
| 3540806100025 | 1212 | 512 | 400 | 20 | 1,12 | 0,8 | 567 | 301 | 1,2398 |
| 3540806100030 | 1755 | 512 | 50 | 28,5 | 1,66 | 1,2 | 795 | 436 | 1,1749 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of **VALVE AND HOLDER**.

CONTROL version

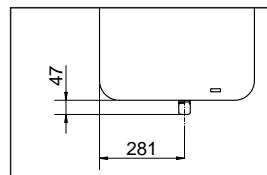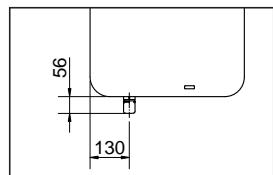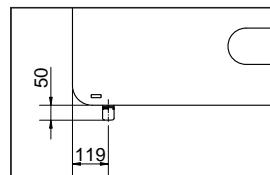

BADGE® CONTROL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100041 | 404 | 1604 | 50 | 19 | 0,96 | 1,1 | 572 | 306 | 1,2224 |
| 3540806100051 | 1212 | 512 | 250 | 20 | 1,12 | 0,8 | 567 | 301 | 1,2398 |
| 3540806100050 | 1755 | 512 | 50 | 28,5 | 1,66 | 1,2 | 795 | 436 | 1,1749 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



BADGE® ELECTRIC

design Simone Micheli



3D
TRADEMARK



page 80

EUROPEAN WARRANTY

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

COLOURS:

Radiators and accessories: standard white R01 colour. For other colours see page 388.

PRODUCT CERTIFICATES



Electrical resistors: CLASS 2

Minimum class protection: IP 44

Seasonal energy efficiency η_s : ≥38%

Wire Length: 1200 mm with Schuko plug

Electrical only: Digital Chrono-thermostat

AWARD


DESIGN PL+US
WINNER

COMFORT & DESIGN
AWARD

ŁAZIENKA
AWARD

PRIX DU DESIGN IDÉO BAIN
NOMINÉ

HOW TO PLACE ELECTRIC RADIATORS

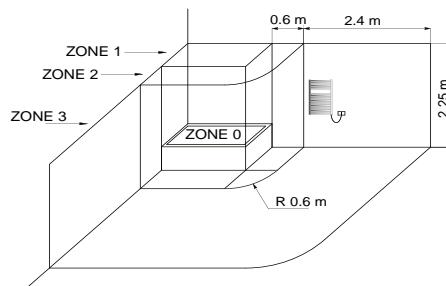

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.

All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.





The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.


ACCESSORIES



Accessories and spare parts- see from page 366.

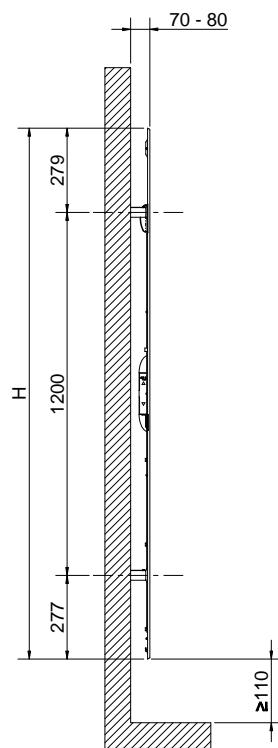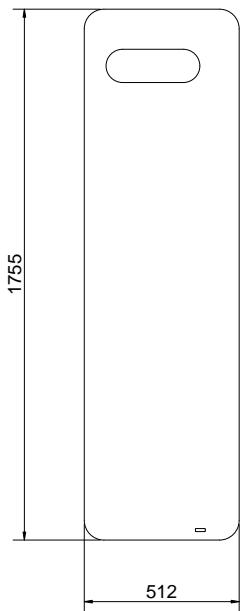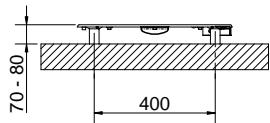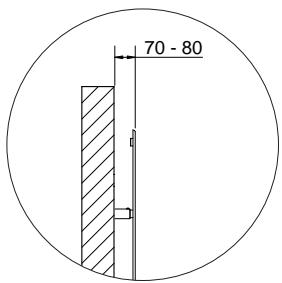

HOW TO PLACE
TOWEL BAR
BADGE VERTICAL
(ACCESSORIES)

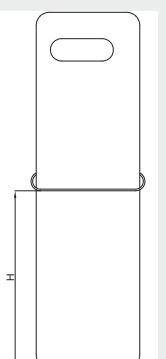


| Model | H |
|----------|------------|
| | [mm] |
| 1755x512 | 870 |

BADGE® ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|---|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| CLASS 2 - DIGITAL CHRONO-THERMOSTAT, SCHUKO PLUG, V 230 | | | | |
| 3582806100003 | 1755 | 512 | 650 | 28,5 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

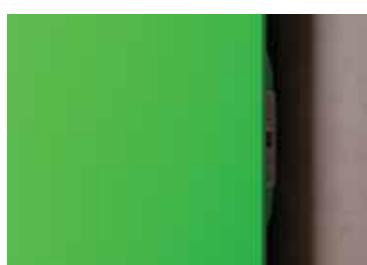

- DIGITAL THERMOSTAT WITH LCD DISPLAY
- DAILY AND WEEKLY PROGRAM SET
- POSITIONED ON THE RIGHT SIDE ONLY



HAND® HAND® CONTROL



**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves (STANDARD VERSION)

Valves with thermostatic head (CONTROL VERSION)

Fittings for copper pipe (\varnothing 12/14/15)

Fittings for multilayer pipe (\varnothing 16 x2)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.

For other colours see page 388.

PRODUCT CERTIFICATES



EURONORM
EN 442-1

P. max: 5 bar





T. max: 110° C

Available for central heating systems


Connections: n° 2 x G 1/2" - n° 1 x G 1/2"




HAND® CONTROL

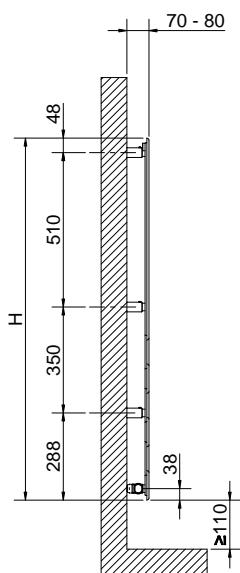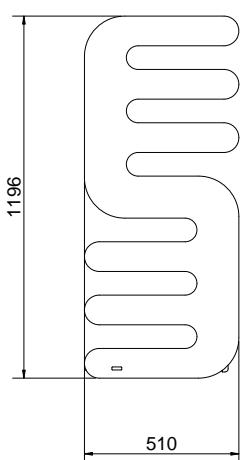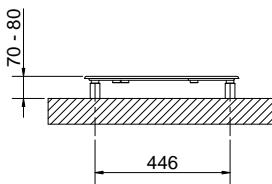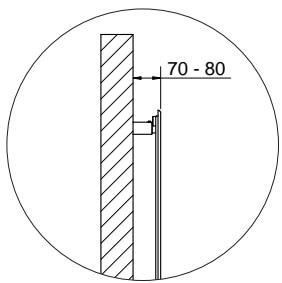

CONTROL version

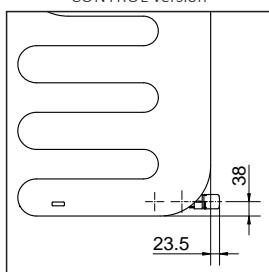

CONNECTION detail

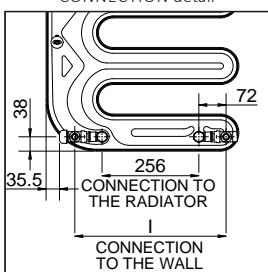

HAND®

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3540806100011 | 1200 | 514 | 400 | 15,5 | 0,76 | 1,3 | 490 | 259 | 1,2475 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. includes **VALVES AND HOLDER**.

HAND® CONTROL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3540806100016 | 1200 | 514 | 400 | 15,5 | 0,76 | 1,3 | 490 | 259 | 1,2475 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. includes **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



HAND® ELECTRIC



EUROPEAN WARRANTY

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PRODUCT CERTIFICATES



PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

Electrical resistors: CLASS 2


Minimum class protection: IP 44

Seasonal energy efficiency η_s : ≥38%

Wire Length: 1200 mm with Schuko plug

Electrical only: Digital Chrono-thermostat

HOW TO PLACE ELECTRIC RADIATORS

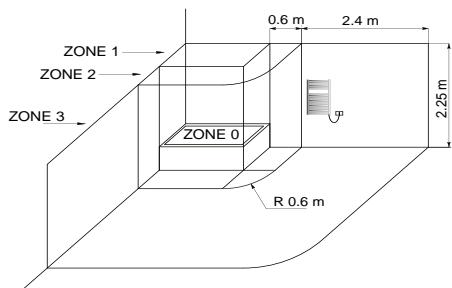

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.







All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.



- DIGITAL THERMOSTAT WITH LCD DISPLAY
- DAILY AND WEEKLY PROGRAM SET
- POSITIONED ON THE RIGHT SIDE ONLY

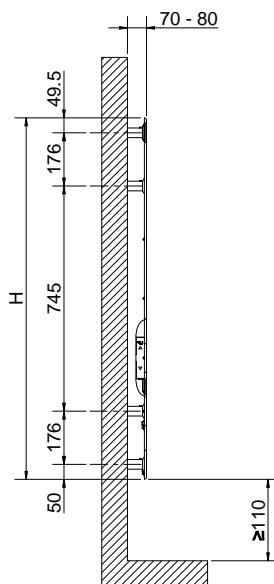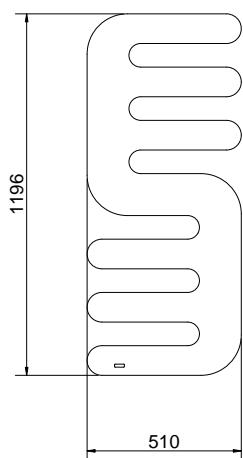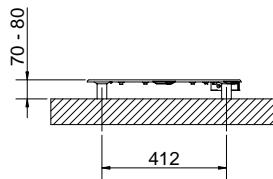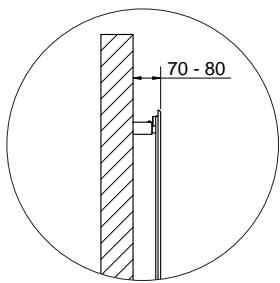

HAND® ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|---|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| CLASS 2 - DIGITAL CHRONO-THERMOSTAT, SCHUKO PLUG, V 230 | | | | |
| 3582806100201 | 1200 | 514 | 500 | 15,5 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.



E.SIGN CONTROL

PATENTED



5 YEARS
WARRANTY

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves with thermostatic head
Fittings for copper pipe (\varnothing 12/14/15)
Fittings for multilayer pipe (\varnothing 16 x2)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.



PRODUCT CERTIFICATES





AWARDS




REVERSIBLE

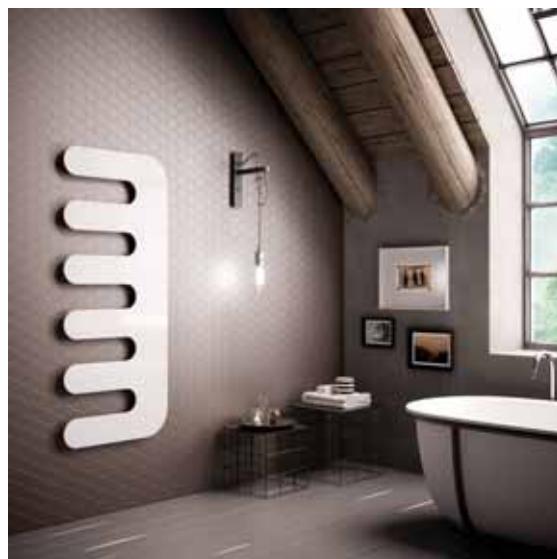


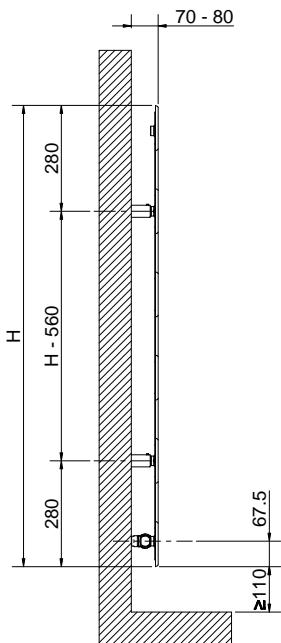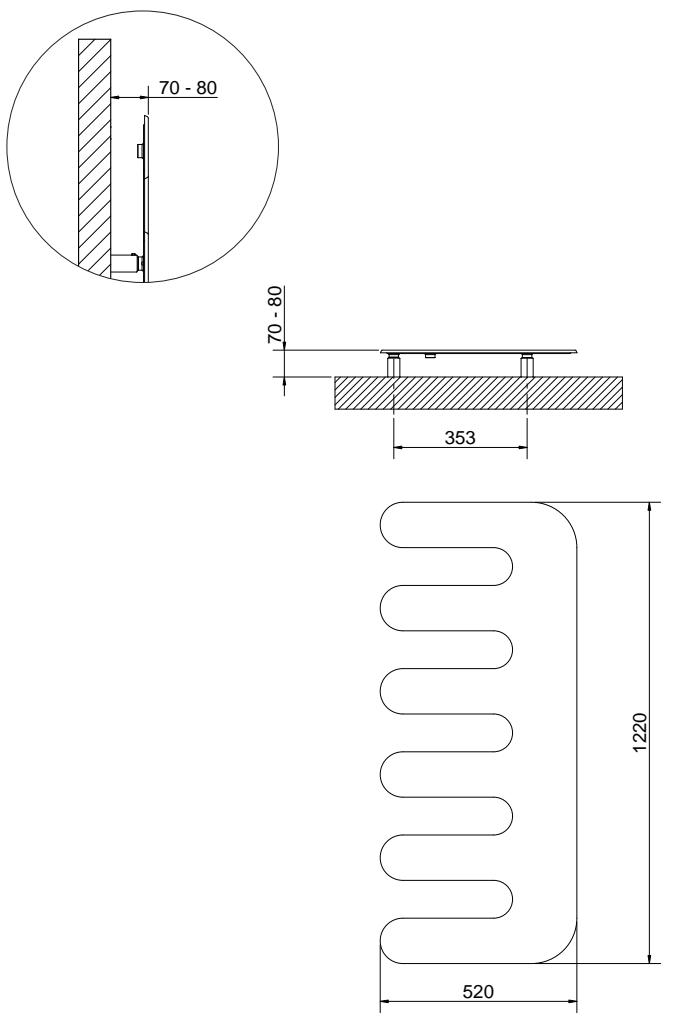

Version with PIPE CENTRES 50 mm

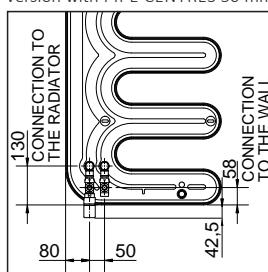

CONNECTION detail

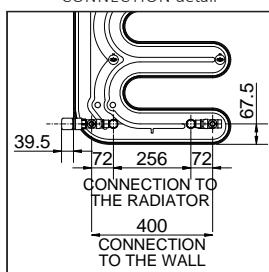

E.SIGN CONTROL

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100210 | 1220 | 520 | 400 | 16,2 | 0,9 | 1,3 | 508 | 272 | 1,2225 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

Art. Nr. includes **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

E.SIGN CONTROL - PIPE CENTRES 50 MM

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100220 | 1220 | 520 | 50 | 16,2 | 0,9 | 1,3 | 508 | 272 | 1,2225 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

Art. Nr. includes **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



MOVIE®

design Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves

Fittings for copper pipe (\varnothing 12/14/15)

Fittings for multilayer pipe (\varnothing 16 x2)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.

For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

AWARD



COMFORT & DESIGN

NOMINÉ


ACCESSORIES

| | |
|--|--|
| | <p>Liquid thermostatic head - polished</p> |
| | <p>Art. Nr. 5035270710002</p> |


Accessories and spare parts- see from page 366.

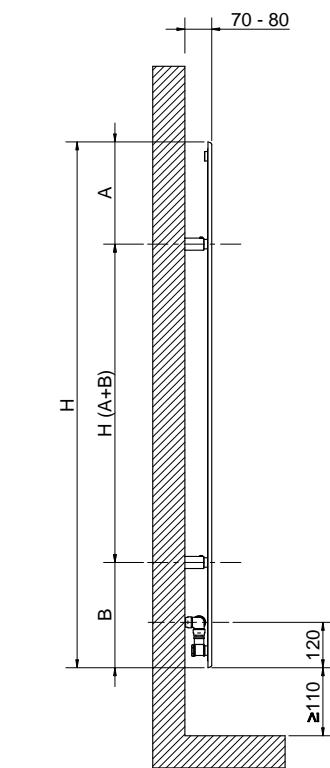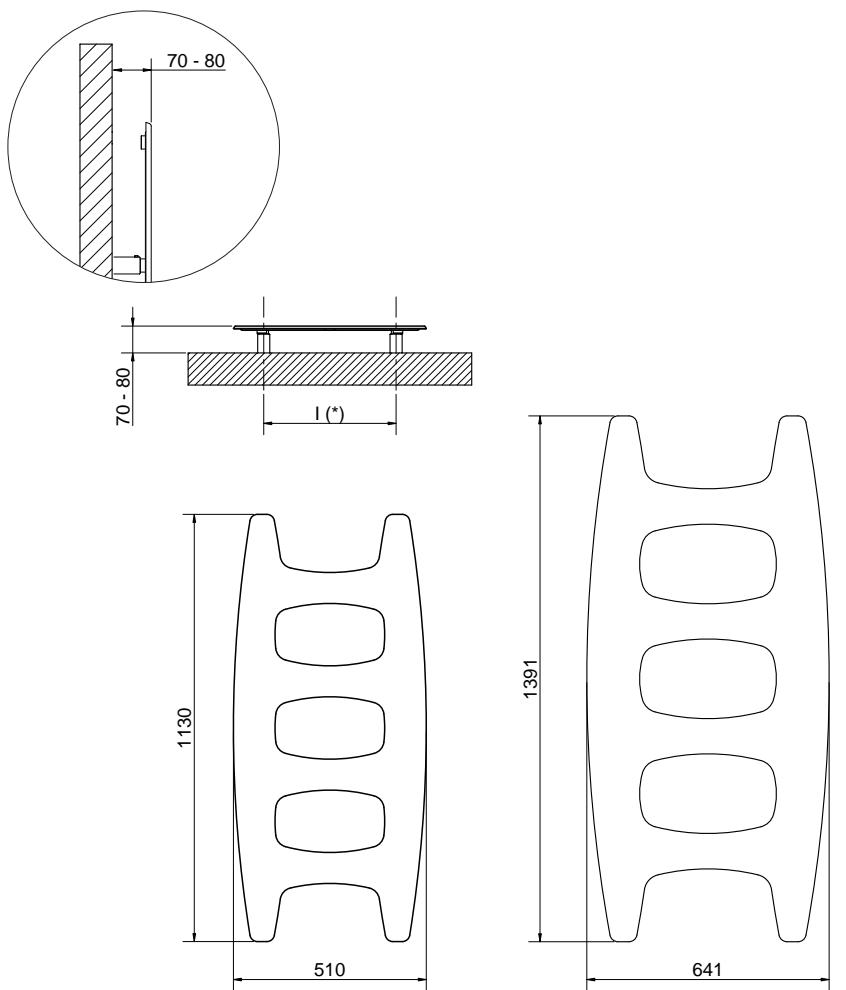

THERMOSTATIC HEAD positioning (optional)

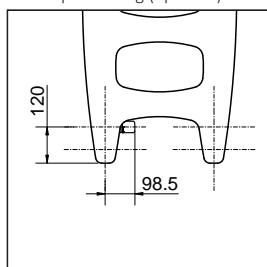

CONNECTION detail

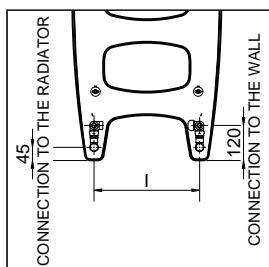

| H [mm] | A [mm] | B [mm] | I (*) [mm] |
|-------------|--------|--------|------------|
| 1130 | 240 | 235 | 350 |
| 1392 | 270 | 280 | 350 |

MOVIE®

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100002 | 1130 | 510 | 360 ÷ 400 | 15 | 0,6 | 1,1 | 385 | 209 | 1,1958 |
| 3540806100001 | 1392 | 642 | 450 | 18 | 0,92 | 1,3 | 559 | 300 | 1,2202 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of **VALVE AND HOLDER**.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



MOVIE® ELECTRIC

design Mariano Moroni



EUROPEAN WARRANTY

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PRODUCT CERTIFICATES



AWARD

COMFORT & DESIGN NOMINÉ



Electrical resistors: CLASS 2


Minimum class protection: IP 44

Seasonal energy efficiency η_s : ≥38%

Wire Length: 1200 mm with Schuko plug

Electrical only: Digital Chrono-thermostat

HOW TO PLACE ELECTRIC RADIATORS

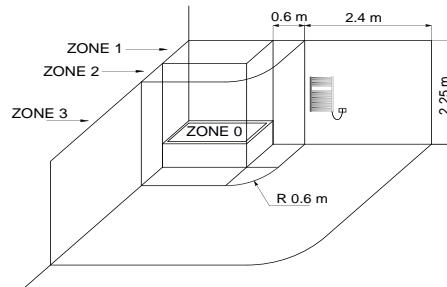

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.



- DIGITAL THERMOSTAT WITH LCD DISPLAY
- DAILY AND WEEKLY PROGRAM SET
- POSITIONED ON THE RIGHT SIDE ONLY

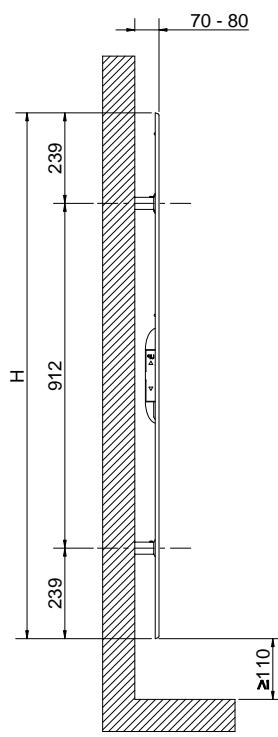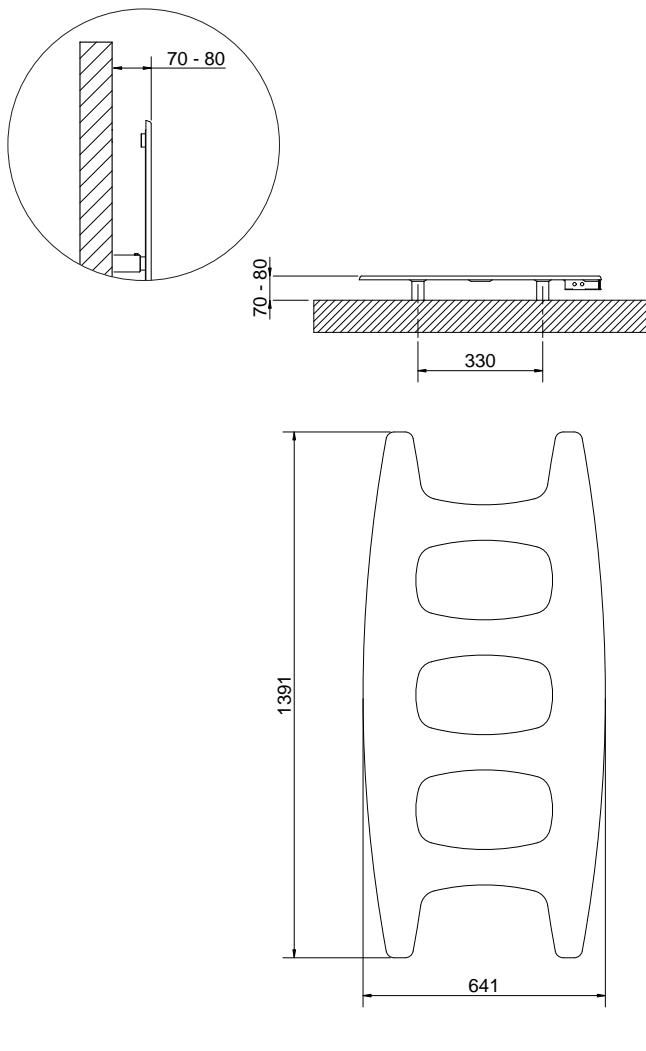

MOVIE® ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|---|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | Kg |
| CLASS 2 - DIGITAL CHRONO-THERMOSTAT, SCHUKO PLUG, V 230 | | | | |
| 3582806100101 | 1392 | 642 | 640 | 16 |

Art. Nr. are referred to white R01 colour- version. For other colours price has to be increased by 30%.

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSIONS
TECHNICAL SUPPORT



JUNGLE®

JUNGLE® CONTROL

design Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves (STANDARD VERSION)

Valves with thermostatic head (CONTROL VERSION)

Fittings for copper pipe (\varnothing 12/14/15)

Fittings for multilayer pipe (\varnothing 16 x2)

PRODUCT CERTIFICATES



EN 442-1

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.


For other colours see page 388.

P. max: 5 bar

T. max: 110° C



Available for central heating systems


Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

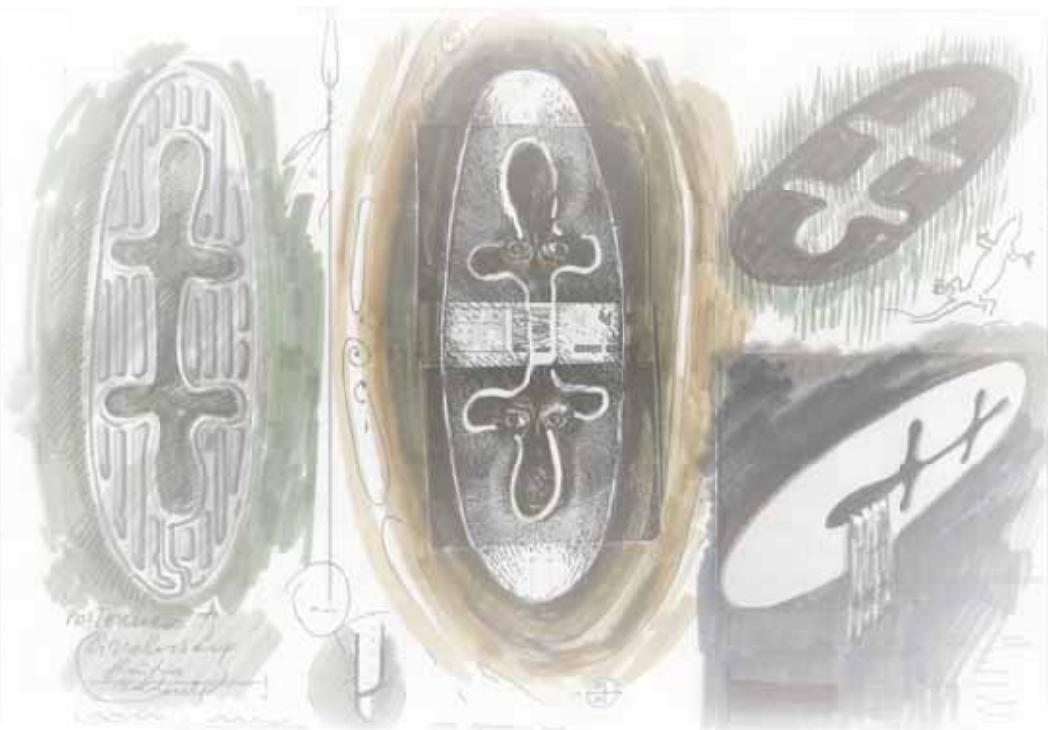

STANDARD version

CONNECTION detail

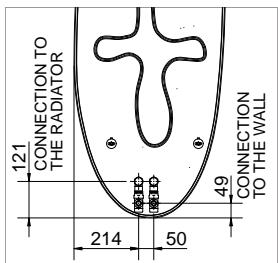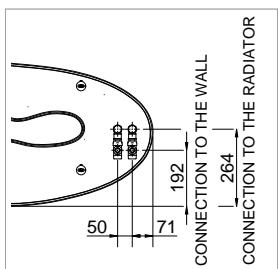


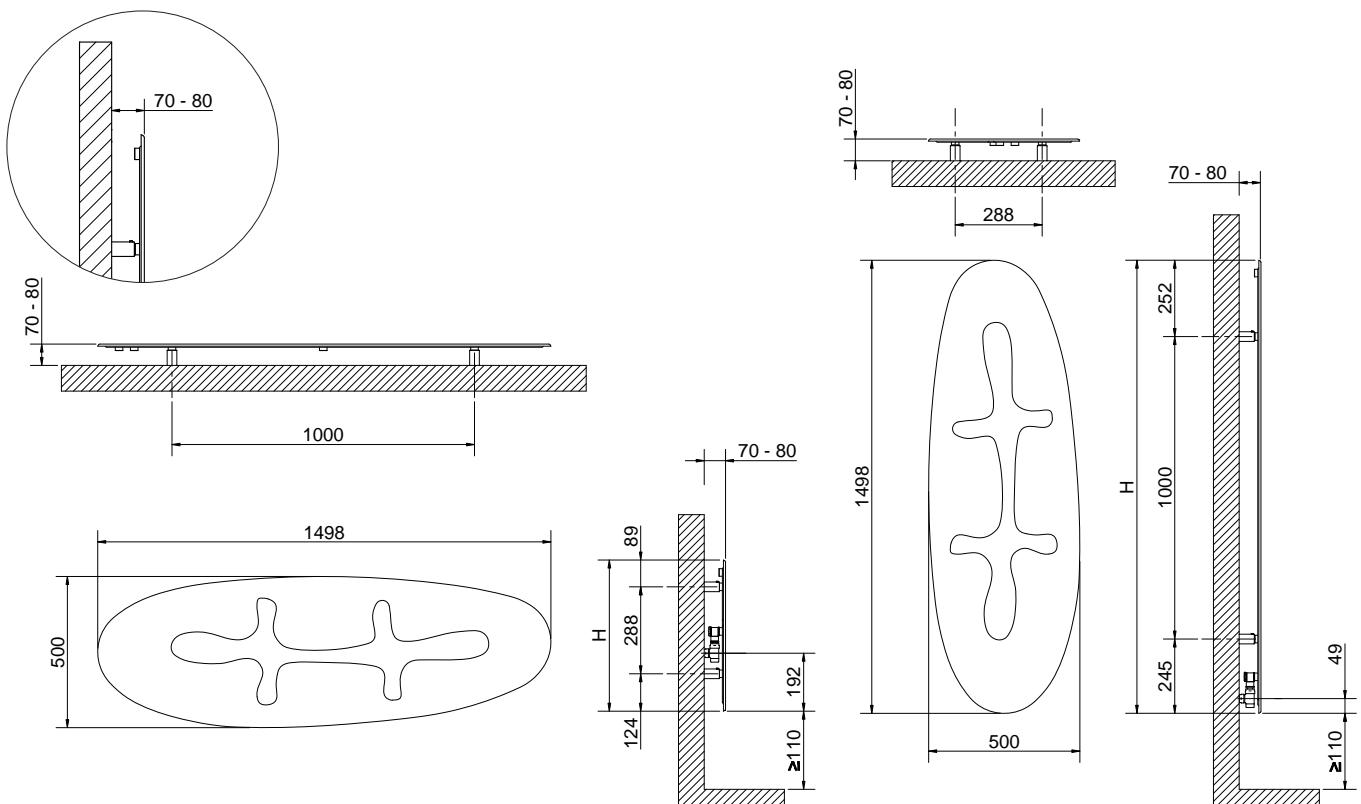
**JUNGLE®**

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100060 | 1500 | 500 | 50 | 19 | 0,92 | 1 | 557 | 296 | 1,2355 |
| 3540806100065 | 500 | 1500 | 50 | 19 | 0,92 | 1 | 573 | 310 | 1,2005 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of **VALVE AND HOLDER**.

CONTROL version

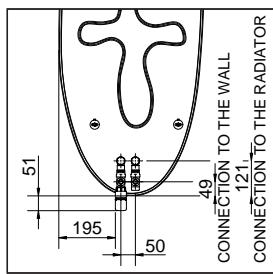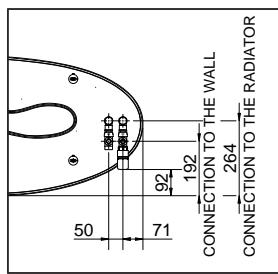**JUNGLE® CONTROL**

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| 3540806100070 | 1500 | 500 | 50 | 19 | 0,92 | 1 | 557 | 296 | 1,2355 |
| 3540806100075 | 500 | 1500 | 50 | 19 | 0,92 | 1 | 573 | 310 | 1,2005 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

Art. Nr. is inclusive of **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



TESSUTO®

design by Marco Pisati



page 102

PATENTED

5 YEARS
WARRANTY

MATERIAL:

Aluminium heating elements 150 mm.

FIXING KIT:

Brackets, air vents, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice included. The fixing kits are compliant with VDI 6034 norm, class 4.

PACKAGING:

The radiator is protected by protective corners, film in polyethylene and with a carton box.

PAINTING PROCESS:

Painted with ecological epoxy (Certificate DIN 55900-1,-2).

COLOURS:

Radiator and fixing kit: standard white colours R01. For other colours see page 388.

PRODUCT CERTIFICATES



AWARD



P. max: 6 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

Valve and holder not included from heights 550÷1000

HOW TO ORDER THE TESSUTO

ARTICLE CODE STRUCTURE

| Radiator model | Width (Elements N°) | Height H in cm | Article code of the connection/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------|----------------|--|----------------|
| AAAA | BB | CCC | DDD | EEE B |

Example

| Radiator model Example: Radiator Tessuto | Width (Elements N°) Example: 3 Elements | Height H in cm Example: 100 mm | Article code of the connection Example: connection V11 | Constant value |
|---|--|-----------------------------------|---|----------------|
| TESS | 03 | 100 | V11 | R01 B |

**EXAMPLE OF ARTICLE CODE
CREATION**

In case of a TESSUTO 452x1000 mm, with V11 connection.

The article code will be:

TESS 03 100 V11 R01 B

ACCESSORIES



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990310543


Multilayer connection Ø 16 x2
Art. Nr. 5991990310542



PIPE COVERING KIT
Available with valve


Art. Nr. 5103000000089

V1-V2-V3-V4-V5-V6




Measures for Elegant square manual valve

V7-V8



V11





HOOK LEFT
L. 156 mm
Pure White R01


Art. Nr. 5991990310688

Other accessories- page 266-267.


Accessories and spare parts- see from page 366.

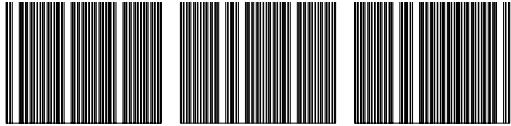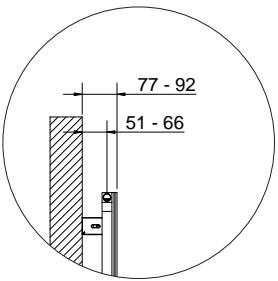**EACH RADIATOR IS UNIQUE**


Each Tessuto radiator is unique, the image is always similar to the original but the rhythm is always different, resulting in infinite rhythms and designs. The assembly of the elements involves random combinations of the motif that makes each radiator a "unique" piece different from the others.

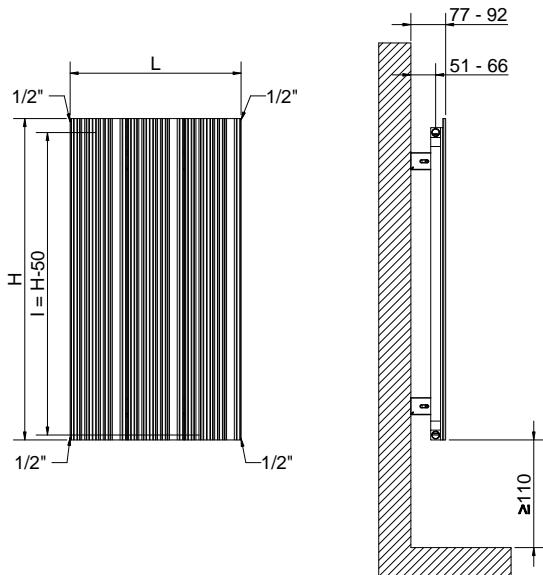

Standard connections

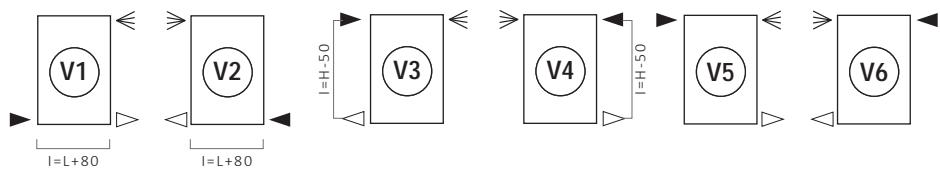

Special connections

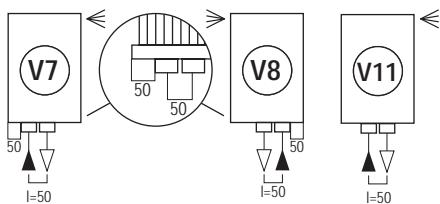

Always specify the kind of connection needed when ordering.

Legend =
 ► In ▷ Out ⇐ Airvent
 | Pipe Centres L Width □ Connection

TESSUTO®

DDD: replace with the type of connection.

| Art. Nr. | Height | Width | El. N° | Pipe Centres V3 - V4 | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n. | |
|-----------------------|--------|-------|--------|-------------------------|---------------|---------|------------------|------------------------|-----|-------------|--------|
| | | | | | | | | I | L | | |
| TESS 03 055 DDD R01 B | 550 | 550 | 3 | 452 | 500 | 7,4 | 1,0 | 0,5 | 278 | 144 | 1,2870 |
| TESS 04 055 DDD R01 B | | | 4 | 603 | 500 | 9,8 | 1,3 | 0,7 | 371 | 192 | 1,2870 |
| TESS 05 055 DDD R01 B | | | 5 | 754 | 500 | 12,3 | 1,7 | 0,9 | 464 | 241 | 1,2870 |
| TESS 06 055 DDD R01 B | | | 6 | 905 | 500 | 14,7 | 2,0 | 1,1 | 556 | 289 | 1,2870 |
| TESS 03 065 DDD R01 B | 650 | 650 | 3 | 452 | 600 | 8,6 | 1,2 | 0,6 | 320 | 165 | 1,2900 |
| TESS 04 065 DDD R01 B | | | 4 | 603 | 600 | 11,5 | 1,6 | 0,8 | 426 | 220 | 1,2900 |
| TESS 05 065 DDD R01 B | | | 5 | 754 | 600 | 14,3 | 1,9 | 1,0 | 533 | 276 | 1,2900 |
| TESS 06 065 DDD R01 B | | | 6 | 905 | 600 | 17,2 | 2,3 | 1,2 | 639 | 331 | 1,2900 |
| TESS 03 075 DDD R01 B | 750 | 750 | 3 | 452 | 700 | 9,8 | 1,3 | 0,6 | 359 | 186 | 1,2931 |
| TESS 04 075 DDD R01 B | | | 4 | 603 | 700 | 13,1 | 1,8 | 0,9 | 479 | 248 | 1,2931 |
| TESS 05 075 DDD R01 B | | | 5 | 754 | 700 | 16,4 | 2,2 | 1,1 | 599 | 310 | 1,2931 |
| TESS 06 075 DDD R01 B | | | 6 | 905 | 700 | 19,7 | 2,7 | 1,3 | 719 | 371 | 1,2931 |
| TESS 03 085 DDD R01 B | 850 | 850 | 3 | 452 | 800 | 11,1 | 1,5 | 0,7 | 398 | 206 | 1,2962 |
| TESS 04 085 DDD R01 B | | | 4 | 603 | 800 | 14,8 | 2,0 | 0,9 | 531 | 274 | 1,2962 |
| TESS 05 085 DDD R01 B | | | 5 | 754 | 800 | 18,5 | 2,5 | 1,2 | 664 | 343 | 1,2962 |
| TESS 06 085 DDD R01 B | | | 6 | 905 | 800 | 22,2 | 3,0 | 1,4 | 796 | 411 | 1,2962 |
| TESS 03 100 DDD R01 B | 1000 | 1000 | 3 | 452 | 950 | 12,9 | 1,7 | 0,8 | 455 | 234 | 1,3008 |
| TESS 04 100 DDD R01 B | | | 4 | 603 | 950 | 17,3 | 2,3 | 1,0 | 606 | 312 | 1,3008 |
| TESS 05 100 DDD R01 B | | | 5 | 754 | 950 | 21,6 | 2,9 | 1,3 | 758 | 390 | 1,3008 |
| TESS 06 100 DDD R01 B | | | 6 | 905 | 950 | 25,9 | 3,5 | 1,5 | 910 | 468 | 1,3008 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



TESSUTO®

design by Marco Pisati



PATENTED

5 YEARS
WARRANTY

MATERIAL:

Aluminium heating elements 150 mm.

FIXING KIT:

Brackets, air vents, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice included. The fixing kits are compliant with VDI 6034 norm, class 4.

PRODUCT CERTIFICATES



AWARD



HOW TO ORDER THE TESSUTO

ARTICLE CODE STRUCTURE

| Radiator model | Width (Elements N°) | Height H in cm | Article code of the connection/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------|----------------|--|----------------|
| AAAA | BB | CCC | DDD | EEE B |

Example


| Radiator model Example: Tessuto radiator | Width (Elements N°) Example: 3 elements | Height H in cm Example: 100 mm | Article code of the connection Example: connection V11 | Constant value |
|---|--|-----------------------------------|---|----------------|
| TESS | 03 | 100 | V11 | R01 B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a TESSUTO 452x1000 mm radiator, with V11 connection. The article code will be:
TESS 03 100 V11 R01 B

EACH RADIATOR IS UNIQUE

Each Tessuto radiator is unique, the image is always similar to the original but the rhythm is always different, resulting in infinite rhythms and designs. The assembly of the elements involves random combinations of the motif that makes each radiator a "unique" piece different from the others.

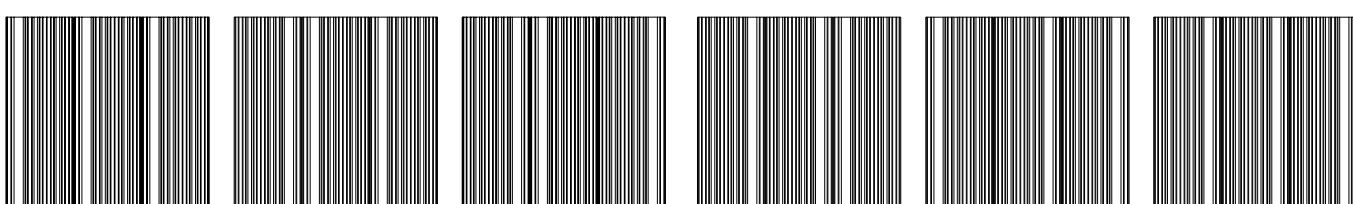

ACCESSORIES



HOOK RIGHT
L. 156 mm
Pure White R01

Art. Nr. 5991990310688



SIDE TOWEL BAR RIGHT
L. 233 mm
Pure White R01





Art. Nr. 5991990310691



HALS SIZE SHELF RIGHT
L. 233 mm
Pure White R01


Art. Nr. 5991990310694

Other accessories- page 266-267.

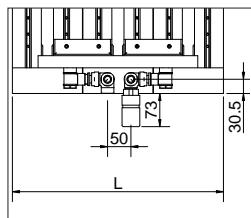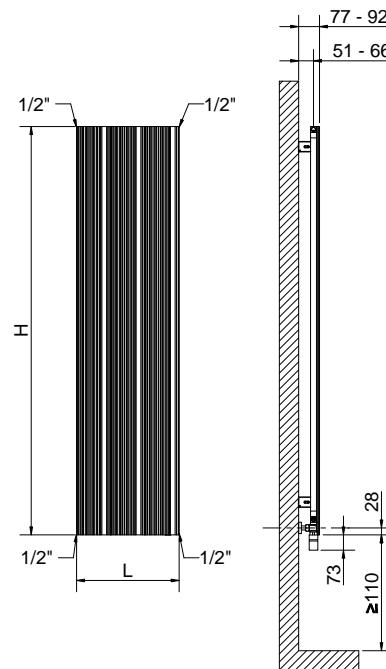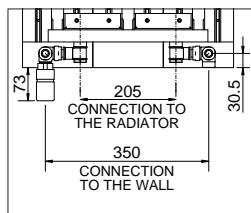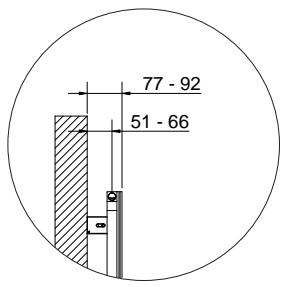


Standard connections

Always specify the kind of connection needed when ordering.

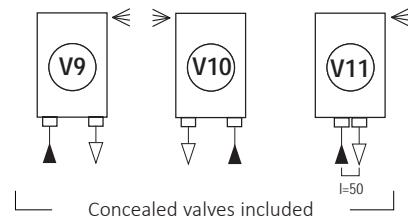

Concealed valves included

Legend = In Out Airvent Pipe Centres Width Connection

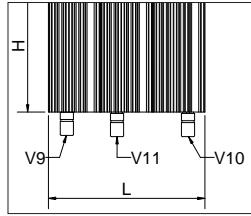

TESSUTO®

DDD: replace with the type of connection.

| Art. Nr. | Height | Width | El. N° | Pipe Centres ^(*) | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n. |
|-----------------------|--------|-------|--------|-----------------------------|------------|---------|---------------|---------------------|-----------|-------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| TESS 02 120 DDD R01 B | 301 | 2 | 200 | 9,8 | 1,4 | 0,5 | 352 | 180 | 1,3123 | |
| TESS 03 120 DDD R01 B | 452 | 3 | 350 | 14,8 | 2,0 | 0,8 | 528 | 270 | 1,3123 | |
| TESS 04 120 DDD R01 B | 603 | 4 | 500 | 19,8 | 2,7 | 1,1 | 704 | 360 | 1,3123 | |
| TESS 02 140 DDD R01 B | 301 | 2 | 200 | 11,4 | 1,6 | 0,6 | 399 | 203 | 1,3239 | |
| TESS 03 140 DDD R01 B | 452 | 3 | 350 | 17,3 | 2,4 | 0,9 | 599 | 305 | 1,3239 | |
| TESS 04 140 DDD R01 B | 603 | 4 | 500 | 23,1 | 3,2 | 1,2 | 798 | 406 | 1,3239 | |
| TESS 02 160 DDD R01 B | 301 | 2 | 200 | 13,2 | 1,8 | 0,7 | 445 | 225 | 1,3354 | |
| TESS 03 160 DDD R01 B | 452 | 3 | 350 | 19,9 | 2,7 | 1,0 | 667 | 337 | 1,3354 | |
| TESS 04 160 DDD R01 B | 603 | 4 | 500 | 26,6 | 3,6 | 1,4 | 889 | 450 | 1,3354 | |
| TESS 05 160 DDD R01 B | 754 | 5 | 650 | 33,4 | 4,5 | 1,7 | 1112 | 562 | 1,3354 | |
| TESS 02 180 DDD R01 B | 301 | 2 | 200 | 14,9 | 2,0 | 0,7 | 489 | 247 | 1,3376 | |
| TESS 03 180 DDD R01 B | 452 | 3 | 350 | 22,4 | 3,1 | 1,1 | 734 | 370 | 1,3376 | |
| TESS 04 180 DDD R01 B | 603 | 4 | 500 | 30,0 | 4,1 | 1,5 | 978 | 494 | 1,3376 | |
| TESS 05 180 DDD R01 B | 754 | 5 | 650 | 37,5 | 5,1 | 1,9 | 1223 | 617 | 1,3376 | |
| TESS 02 200 DDD R01 B | 301 | 2 | 200 | 16,5 | 2,3 | 0,8 | 532 | 268 | 1,3397 | |
| TESS 03 200 DDD R01 B | 452 | 3 | 350 | 24,9 | 3,4 | 1,2 | 798 | 403 | 1,3397 | |
| TESS 04 200 DDD R01 B | 603 | 4 | 500 | 33,3 | 4,5 | 1,7 | 1064 | 537 | 1,3397 | |
| TESS 05 200 DDD R01 B | 754 | 5 | 650 | 41,6 | 5,7 | 2,1 | 1331 | 671 | 1,3397 | |
| TESS 02 220 DDD R01 B | 301 | 2 | 200 | 18,2 | 2,5 | 0,9 | 574 | 289 | 1,3419 | |
| TESS 04 220 DDD R01 B | 452 | 3 | 350 | 27,4 | 3,7 | 1,3 | 861 | 434 | 1,3419 | |
| TESS 04 220 DDD R01 B | 603 | 4 | 500 | 36,6 | 5,0 | 1,8 | 1148 | 579 | 1,3419 | |
| TESS 05 220 DDD R01 B | 754 | 5 | 650 | 45,8 | 6,2 | 2,3 | 1436 | 724 | 1,3419 | |

Art. Nr. include VALVE KIT, HOLDER AND THERMOSTATIC HEAD, in accordance with UNI-EN 215:2014 and DM 19/02/2007.

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ

^(*)The pipe centers in the table and the pipe centers 50 refers only after valve assembly.



ACCESSORIES TESSUTO®

design by Marco Pisati




MATERIAL:

Painted carbon steel.

FIXING KIT:

The accessories are applicable only to Tessuto radiator. Versatile fixing, through lateral guides, at the desired height. Screws and tightening nuts included.


HOOK RIGHT / LEFT - L. 156 mm



Painted support Art. Nr.

RAL 9010 - R01
Pure White 5991990310688


SIDE TOWEL BAR RIGHT / LEFT - L. 233 mm

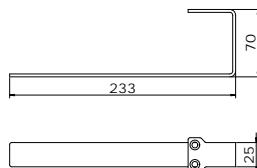

Painted support Art. Nr.

RAL 9010 - R01
Pure White 5991990310691

HALF SIZE SHELF RIGHT / LEFT L. 233 mm

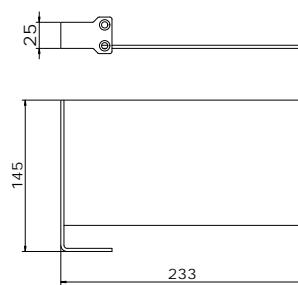

Painted support Art. Nr.

RIGHT 5991990310694
LEFT 5991990310695

Accessories with different colour from White R01 can be ordered together with radiator only and not separately. Article nr. are referred to WHITE R01 colour version. Available also coloured version with surcharge of 30%. See page 388.

ACCESSORIES TESSUTO®

design by Marco Pisati




MATERIAL:

Painted carbon steel.

FIXING KIT:

The accessories are applicable only to Tessuto radiator. Versatile fixing, through lateral guides, at the desired height. Screws and tightening nuts included.

TOWEL BAR

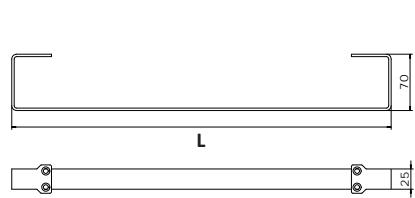

PACKAGING:


Polyethylene bag and a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Standard white colours R01. For other colours See page 388.


| Painted support | Art. Nr. |
|------------------------------|--|
| RAL 9010 - R01 Pure White | L. 468 applicable on Width 3 El. (452 mm) 5991990310689 |
| | L. 619 applicable on Width 4 El. (603 mm) 5991990310690 |

SHELF

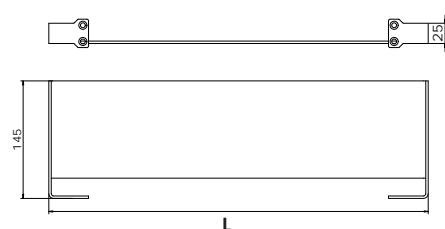

| Painted support | Art. Nr. |
|------------------------------|--|
| RAL 9010 - R01 Pure White | L. 468 applicable on Width 3 El. (452 mm) 5991990310692 |
| | L. 619 applicable on Width 4 El. (603 mm) 5991990310693 |

MULTIFUNCTIONAL SHELF

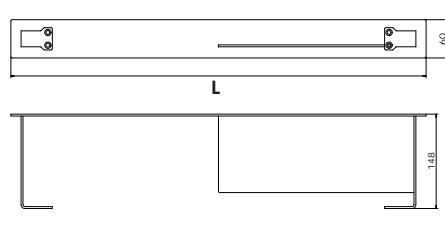

| Painted support | Art. Nr. |
|------------------------------|--|
| RAL 9010 - R01 Pure White | L. 468 applicable on Width 3 El. (452 mm) 5991990310696 |
| | L. 619 applicable on Width 4 El. (603 mm) 5991990310697 |

Accessories with different colour from White R01 can be ordered together with radiator only and not separately. Article nr. are referred to WHITE R01 colour version. Available also coloured version with surcharge of 30%. See page 388.



FRAME INOX VERTICAL



page 112

**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm.
Heating elements in painted carbon steel.
Heating plate in polished stainless steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME INOX RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | | | | | |
|----------------|-------------------------|---------------------|----------------------|--------------------------------|-------------------------|----------------------------|-----------------------------------|----------------|
| Radiator model | Example: Frame radiator | Radiator dimensions | Example: mm 464x1822 | Article code of the connection | Example: connection V09 | Article code of the finish | Example: Polished stainless steel | Constant value |
| FRST | 464 18 | V09 | X01 | B | | | | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME INOX VT 464x1822 mm radiator, with V09 connection.
The article code will be:
FRST 464 18 V09 X01 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990301076

Multilayer connection Ø 16 x2
Art. Nr. 5991990301075




Straight hanger polished for models

L. 352 (L= 404 mm)
Art. Nr. 5991990300187


L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184


L. 688 (L= 740 mm)
Art. Nr. 5991990300188

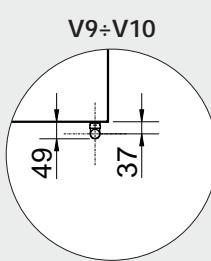

Measures for Elegant square manual valve

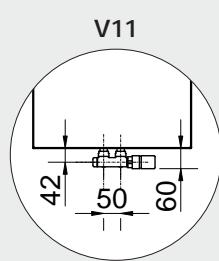

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

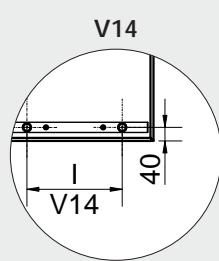

Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)



Kit 3 straight hanger polished for models



L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185



L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

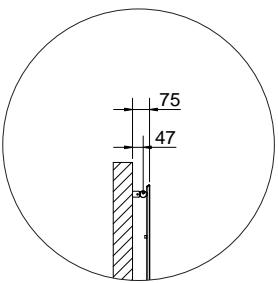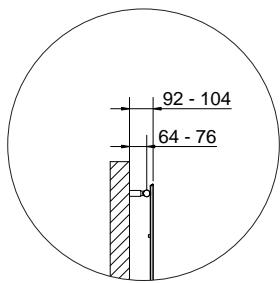V09 - V10 - V11
V12 - V13


V14

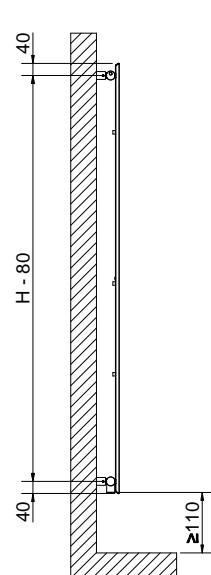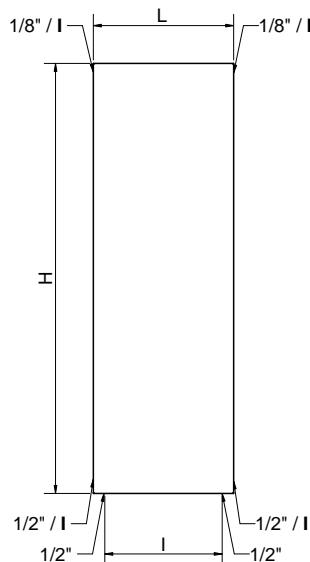POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

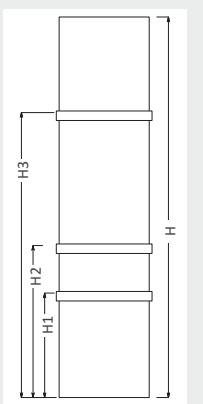

Standard connections

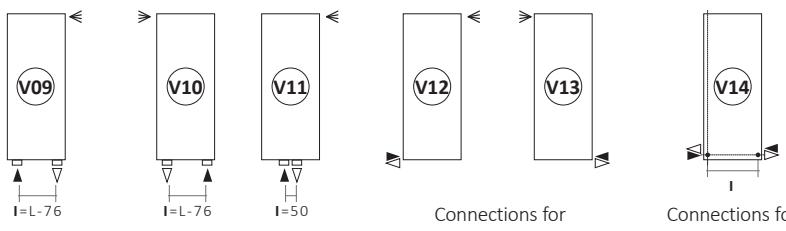

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

► In ▷ Out ≤ Airvent
 I Pipe Centres L Width □ Connection

FRAME INOX VERTICAL - POLISHED STAINLESS STEEL

DDD: replace with the type of connection.

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [kg] | Surface [m²] | Water Content [lt] | Thermal output Watt $\Delta t = 50^\circ\text{C}$ | Thermal output Watt $\Delta t = 30^\circ\text{C}$ | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|--------------------------|---|---|---------------|
| | | | I [mm] | I [mm] | [kg] | [m²] | [lt] | | | |
| FRST 352 10 DDD X01 B | 352 | 276 | 168 | 168 | 7,2 | 0,75 | 2,64 | 381 | 197 | 1,2894 |
| FRST 464 10 DDD X01 B | 464 | 388 | 280 | 280 | 9,7 | 0,98 | 3,5 | 499 | 258 | 1,2894 |
| FRST 576 10 DDD X01 B | 576 | 500 | 392 | 392 | 12 | 1,21 | 4,4 | 617 | 319 | 1,2894 |
| FRST 688 10 DDD X01 B | 688 | 612 | 504 | 504 | 14,6 | 1,44 | 5,2 | 735 | 380 | 1,2894 |
| FRST 352 12 DDD X01 B | 352 | 276 | 168 | 168 | 8,6 | 0,89 | 3,02 | 455 | 236 | 1,2881 |
| FRST 464 12 DDD X01 B | 464 | 388 | 280 | 280 | 11,4 | 1,17 | 4 | 596 | 309 | 1,2881 |
| FRST 576 12 DDD X01 B | 576 | 500 | 392 | 392 | 14 | 1,44 | 5,1 | 736 | 381 | 1,2881 |
| FRST 688 12 DDD X01 B | 688 | 612 | 504 | 504 | 17,2 | 1,72 | 6,1 | 877 | 454 | 1,2881 |
| FRST 352 14 DDD X01 B | 352 | 276 | 168 | 168 | 9,9 | 1,04 | 3,5 | 529 | 274 | 1,2867 |
| FRST 464 14 DDD X01 B | 464 | 388 | 280 | 280 | 13,2 | 1,36 | 4,6 | 692 | 359 | 1,2867 |
| FRST 576 14 DDD X01 B | 576 | 500 | 392 | 392 | 16,5 | 1,68 | 5,9 | 856 | 444 | 1,2867 |
| FRST 688 14 DDD X01 B | 688 | 612 | 504 | 504 | 19,8 | 2,00 | 7,00 | 1020 | 529 | 1,2867 |
| FRST 352 16 DDD X01 B | 352 | 276 | 168 | 168 | 11,2 | 1,16 | 3,8 | 595 | 309 | 1,2854 |
| FRST 464 16 DDD X01 B | 464 | 388 | 280 | 280 | 14,9 | 1,55 | 5,2 | 789 | 409 | 1,2854 |
| FRST 576 16 DDD X01 B | 576 | 500 | 392 | 392 | 18,6 | 1,94 | 6,8 | 976 | 506 | 1,2854 |
| FRST 352 18 DDD X01 B | 352 | 276 | 168 | 168 | 12,5 | 1,33 | 4,37 | 676 | 351 | 1,2840 |
| FRST 464 18 DDD X01 B | 464 | 388 | 280 | 280 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 |
| FRST 576 18 DDD X01 B | 576 | 500 | 392 | 392 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 |
| FRST 688 18 DDD X01 B | 688 | 612 | 504 | 504 | 25 | 2,56 | 8,7 | 1304 | 677 | 1,2840 |
| FRST 352 20 DDD X01 B | 352 | 276 | 168 | 168 | 13,5 | 1,47 | 4,85 | 750 | 390 | 1,2826 |
| FRST 464 20 DDD X01 B | 464 | 388 | 280 | 280 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 |
| FRST 576 20 DDD X01 B | 576 | 500 | 392 | 392 | 23 | 2,38 | 8 | 1222 | 635 | 1,2826 |
| FRST 688 20 DDD X01 B | 688 | 612 | 504 | 504 | 27,6 | 2,84 | 9,6 | 1447 | 751 | 1,2826 |

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t = 50^\circ\text{C}$ x (desired $\Delta t/50^\circ\text{C}$)ⁿ



FRAME INOX PLUS VERTICAL



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in polished stainless steel

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME INOX PLUS RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the finish | Constant value |
|----------------|---------------------|--------------------------------|----------------------------|----------------|
| FRPL | 464 18 | V09 | X01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME INOX PLUS VT 464x1822 mm radiator, with V09 connection.
The article code will be:
FRPL 464 18 V09 X01 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990301076

Multilayer connection Ø 16 x2
Art. Nr. 5991990301075




Straight hanger polished for models

L. 352 (L= 404 mm)
Art. Nr. 5991990300187


L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184


L. 688 (L= 740 mm)
Art. Nr. 5991990300188

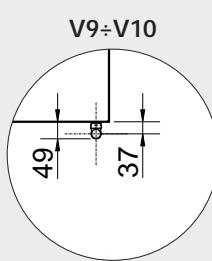

Measures for Elegant square manual valve

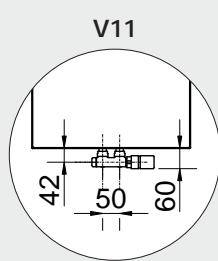

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

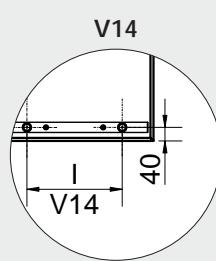

Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)



Kit 3 straight hanger polished for models



L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185



L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

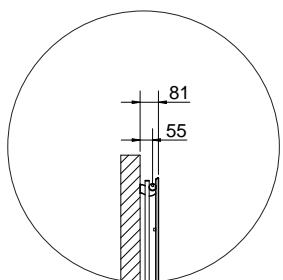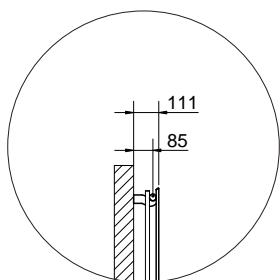V09 - V10 - V11
V12 - V13


V14

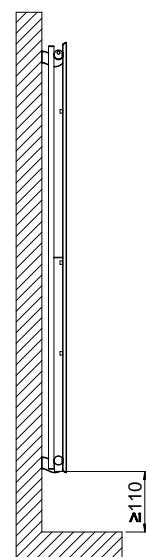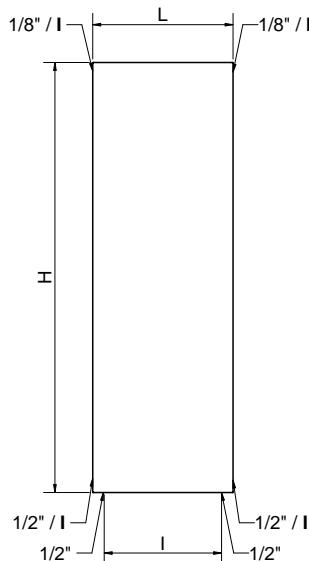POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

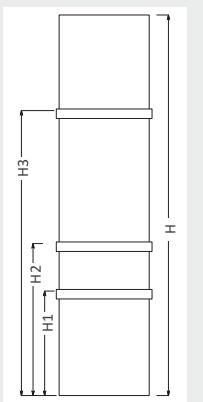

Standard connections

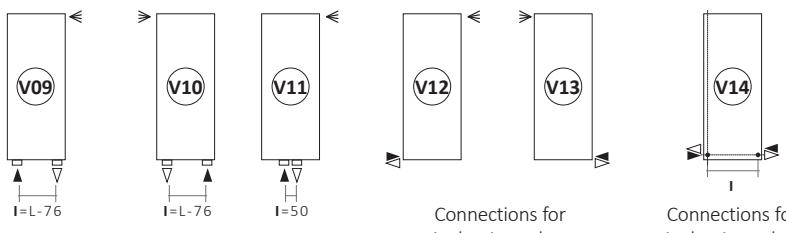Connections for
single-pipe valves.Connections for
single-pipe valves.

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

► In ▷ Out ≈ Airvent
 I Pipe Centres L Width Connection

FRAME INOX PLUS VERTICAL - POLISHED STAINLESS STEEL

DDD: replace with the type of connection.

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [kg] | Surface [m²] | Water Content [lt] | Thermal output Watt $\Delta t = 50^\circ\text{C}$ | Thermal output Watt $\Delta t = 30^\circ\text{C}$ | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|--------------------------|---|---|---------------|
| | | | I [mm] | I [mm] | | | | | | |
| FRPL 352 10 DDD X01 B | 352 | 276 | 168 | 14,3 | 1,35 | 4,5 | 580 | 296 | 1,3152 | |
| FRPL 464 10 DDD X01 B | 464 | 388 | 280 | 20,2 | 1,84 | 6,3 | 790 | 404 | 1,3152 | |
| FRPL 576 10 DDD X01 B | 576 | 500 | 392 | 25,0 | 2,32 | 7,8 | 999 | 510 | 1,3152 | |
| FRPL 688 10 DDD X01 B | 688 | 612 | 504 | 28,6 | 2,81 | 9,0 | 1209 | 618 | 1,3152 | |
| FRPL 352 12 DDD X01 B | 352 | 276 | 168 | 17,1 | 1,61 | 5,3 | 691 | 353 | 1,31355 | |
| FRPL 464 12 DDD X01 B | 464 | 388 | 280 | 24,1 | 2,19 | 7,5 | 940 | 481 | 1,31355 | |
| FRPL 576 12 DDD X01 B | 576 | 500 | 392 | 29,8 | 2,77 | 9,3 | 1190 | 608 | 1,31355 | |
| FRPL 688 12 DDD X01 B | 688 | 612 | 504 | 34,2 | 3,35 | 10,7 | 1439 | 736 | 1,31355 | |
| FRPL 352 14 DDD X01 B | 352 | 276 | 168 | 19,9 | 1,86 | 6,2 | 801 | 415 | 1,2867 | |
| FRPL 464 14 DDD X01 B | 464 | 388 | 280 | 28,0 | 2,54 | 8,8 | 1091 | 565 | 1,2867 | |
| FRPL 576 14 DDD X01 B | 576 | 500 | 392 | 34,7 | 3,21 | 10,8 | 1381 | 716 | 1,2867 | |
| FRPL 688 14 DDD X01 B | 688 | 612 | 504 | 39,7 | 3,88 | 12,4 | 1670 | 865 | 1,2867 | |
| FRPL 352 16 DDD X01 B | 352 | 276 | 168 | 23,9 | 2,17 | 7,5 | 930 | 476 | 1,3117 | |
| FRPL 464 16 DDD X01 B | 464 | 388 | 280 | 31,9 | 2,89 | 10,0 | 1241 | 635 | 1,3117 | |
| FRPL 576 16 DDD X01 B | 576 | 500 | 392 | 39,8 | 3,61 | 12,5 | 1551 | 794 | 1,3117 | |
| FRPL 352 18 DDD X01 B | 352 | 276 | 168 | 25,4 | 2,38 | 7,9 | 1022 | 523 | 1,3105 | |
| FRPL 464 18 DDD X01 B | 464 | 388 | 280 | 35,7 | 3,24 | 11,2 | 1455 | 745 | 1,3105 | |
| FRPL 576 18 DDD X01 B | 576 | 500 | 392 | 45,1 | 4,10 | 13,7 | 1819 | 931 | 1,3105 | |
| FRPL 688 18 DDD X01 B | 688 | 612 | 504 | 50,8 | 4,96 | 15,9 | 2132 | 1092 | 1,3105 | |
| FRPL 352 20 DDD X01 B | 352 | 276 | 168 | 28,2 | 2,63 | 8,8 | 1133 | 580 | 1,3093 | |
| FRPL 464 20 DDD X01 B | 464 | 388 | 280 | 39,5 | 3,59 | 12,3 | 1568 | 803 | 1,3093 | |
| FRPL 576 20 DDD X01 B | 576 | 500 | 392 | 49,9 | 4,54 | 15,0 | 1960 | 1004 | 1,3093 | |
| FRPL 688 20 DDD X01 B | 688 | 612 | 504 | 56,4 | 5,49 | 17,6 | 2363 | 1211 | 1,3093 | |

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t = 50^\circ\text{C}$ x (desired $\Delta t/50^\circ\text{C}$)ⁿ



FRAME INOX HORIZONTAL



5 YEARS
WARRANTY

MATERIAL:

Vertical collectors in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in polished stainless steel

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

HOW TO ORDER THE HORIZONTAL FRAME INOX RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | | | | | |
|----------------|-------------------------|---------------------|----------------------|--------------------------------|-------------------------|----------------------------|-----------------------------------|----------------|
| Radiator model | Example: Frame radiator | Radiator dimensions | Example: mm 464x1822 | Article code of the connection | Example: connection H01 | Article code of the finish | Example: polished stainless steel | Constant value |
| FRST | 464 18 | H01 | X01 | B | | | | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME INOX OR 464x1822 mm, with H01 connection.

The article code will be:

FRST 464 18 H01 X01 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Pipe covering kit for polished valves

Art. Nr. 5103000000044



Manual wall-fit valves


WALL-FIT VALVES
Art. Nr. 5991990311226

Fitting for wall-fit valves
Copper connection Ø 12/14/15
Art. Nr. 5991170300001

Fitting for wall-fit valves
Multilayer connection Ø 16 x2
Art. Nr. 5991170300002


Accessories and spare parts- see from page 371.

H02÷H03÷H04÷H05








Measures for Elegant square manual valve

H08




Measurements for remote valve

Accessories and spare parts- see from page 366.

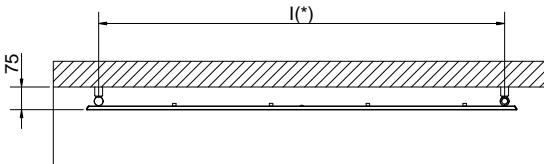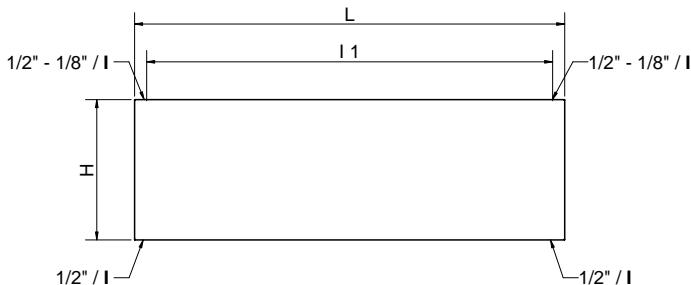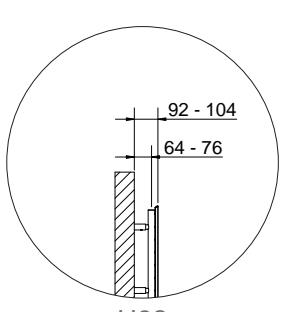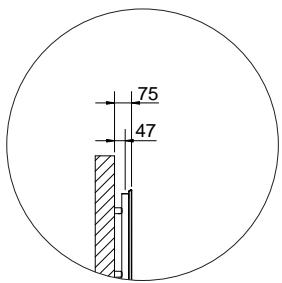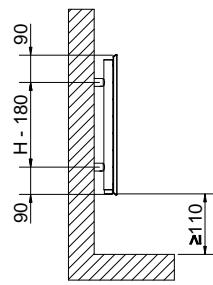

(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections

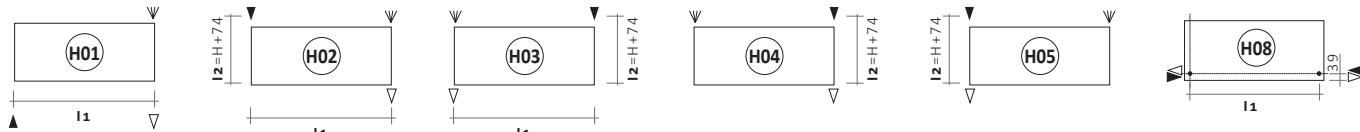

Always specify the kind of connection needed when ordering (from H1 to H8).

I2: valid only for Elegant Cordivari square valves.

Connection for wall-fit valves.

Legend = In Out Airvent **H** Height **I** Pipe Centres **L** Width Connection

FRAME INOX HORIZONTAL - POLISHED STAINLESS STEEL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | Height H [mm] | Pipe Centres (H01-H02-H03-H8) | Pipe Centres (H02-H03-H04-H5) | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt Δt = 50°C | Thermal output Watt Δt = 30°C | Exponent n |
|-----------------------|-----------------|------------------|----------------------------------|----------------------------------|--------------------|------------------------------|-----------------------|--|--|---------------|
| | | | I1 [mm] | I2 [mm] | | | | | | |
| FRST 352 10 DDD X01 B | 352 | 942 | 432 | 7,2 | 0,75 | 2,64 | 381 | 197 | 1,2894 | |
| FRST 464 10 DDD X01 B | 464 | 942 | 544 | 9,7 | 0,98 | 3,5 | 499 | 258 | 1,2894 | |
| FRST 576 10 DDD X01 B | 576 | 942 | 649 | 12,0 | 1,21 | 4,4 | 617 | 319 | 1,2894 | |
| FRST 688 10 DDD X01 B | 688 | 942 | 768 | 14,6 | 1,44 | 5,2 | 735 | 380 | 1,2894 | |
| FRST 352 12 DDD X01 B | 352 | 1142 | 432 | 8,6 | 0,89 | 3,02 | 455 | 236 | 1,2881 | |
| FRST 464 12 DDD X01 B | 464 | 1142 | 544 | 11,4 | 1,17 | 4,0 | 596 | 309 | 1,2881 | |
| FRST 576 12 DDD X01 B | 576 | 1142 | 649 | 14,0 | 1,44 | 5,1 | 736 | 381 | 1,2881 | |
| FRST 688 12 DDD X01 B | 688 | 1142 | 768 | 17,2 | 1,72 | 6,1 | 877 | 454 | 1,2881 | |
| FRST 352 14 DDD X01 B | 352 | 1342 | 432 | 9,9 | 1,04 | 3,5 | 529 | 274 | 1,2867 | |
| FRST 464 14 DDD X01 B | 464 | 1342 | 544 | 13,2 | 1,36 | 4,6 | 692 | 359 | 1,2867 | |
| FRST 576 14 DDD X01 B | 576 | 1342 | 649 | 16,5 | 1,68 | 5,9 | 856 | 444 | 1,2867 | |
| FRST 688 14 DDD X01 B | 688 | 1342 | 768 | 19,8 | 2,00 | 7,0 | 1020 | 529 | 1,2867 | |
| FRST 352 16 DDD X01 B | 352 | 1542 | 432 | 11,2 | 1,16 | 3,8 | 595 | 309 | 1,2854 | |
| FRST 464 16 DDD X01 B | 464 | 1542 | 544 | 14,9 | 1,55 | 5,2 | 789 | 409 | 1,2854 | |
| FRST 576 16 DDD X01 B | 576 | 1542 | 649 | 18,6 | 1,94 | 6,8 | 976 | 506 | 1,2854 | |
| FRST 352 18 DDD X01 B | 352 | 1742 | 432 | 12,5 | 1,33 | 4,37 | 676 | 351 | 1,2840 | |
| FRST 464 18 DDD X01 B | 464 | 1742 | 544 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 | |
| FRST 576 18 DDD X01 B | 576 | 1742 | 649 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 | |
| FRST 688 18 DDD X01 B | 688 | 1742 | 768 | 25,0 | 2,56 | 8,7 | 1304 | 677 | 1,2840 | |
| FRST 352 20 DDD X01 B | 352 | 1942 | 432 | 13,5 | 1,47 | 4,85 | 750 | 390 | 1,2826 | |
| FRST 464 20 DDD X01 B | 464 | 1942 | 544 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 | |
| FRST 576 20 DDD X01 B | 576 | 1942 | 649 | 23,0 | 2,38 | 8,0 | 1222 | 635 | 1,2826 | |
| FRST 688 20 DDD X01 B | 688 | 1942 | 768 | 27,6 | 2,84 | 9,6 | 1447 | 751 | 1,2826 | |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



FRAME INOX DECOR X03

VERTICAL

artwork Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in stainless steel with satin décor on polished background

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME INOX DECOR X03 RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|---|---|---|---|----------------|
| Radiator model Example: Frame radiator | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection V09 | Article code of the finish Example: Inox Decor X03 | Constant value |
| FRST | 464 18 | V09 | X03 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME INOX DECOR X03 VT 464x1822 mm radiator, with V09 connection.

The article code will be:

FRST 464 18 V09 X03 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990301076

Multilayer connection Ø 16 x2
Art. Nr. 5991990301075




Straight hanger polished for models

L. 352 (L= 404 mm)
Art. Nr. 5991990300187


L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184


L. 688 (L= 740 mm)
Art. Nr. 5991990300188

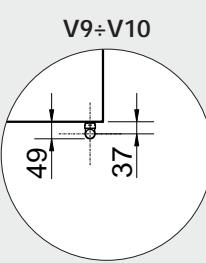

Measures for Elegant square manual valve

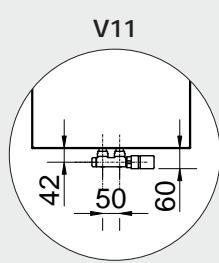

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

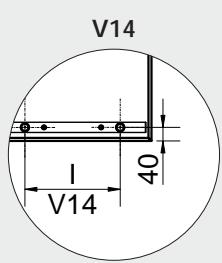

Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)



Kit 3 straight hanger polished for models



L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185



L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

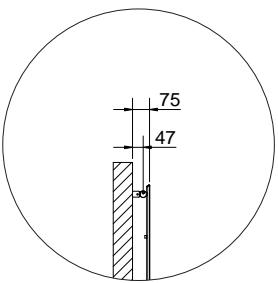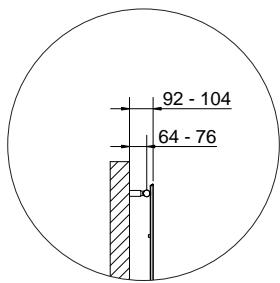V09 - V10 - V11
V12 - V13


V14

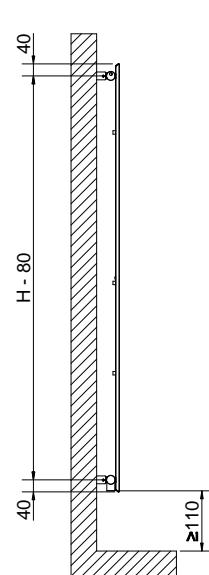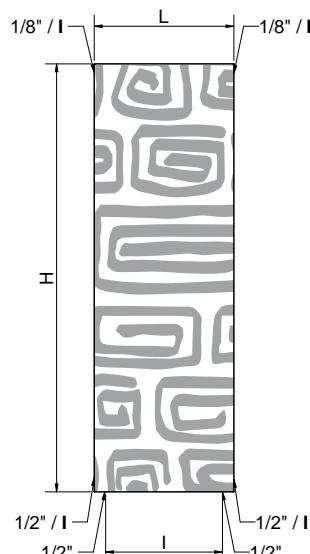POSITIONING OF
TOWEL BAR (ACCESSORIES)

| | H | H1 | H2 | H3 |
|-------------|------|-----|------|----|
| | [mm] | | | |
| 1022 | 300 | 500 | 800 | |
| 1222 | 400 | 600 | 1000 | |
| 1422 | 400 | 700 | 1200 | |
| 1622 | 500 | 800 | 1300 | |
| 1822 | 500 | 800 | 1400 | |
| 2022 | 500 | 800 | 1500 | |

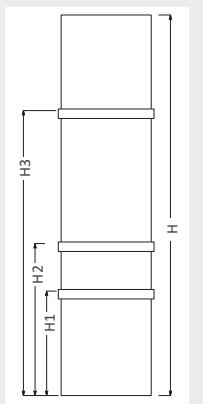

Standard connections

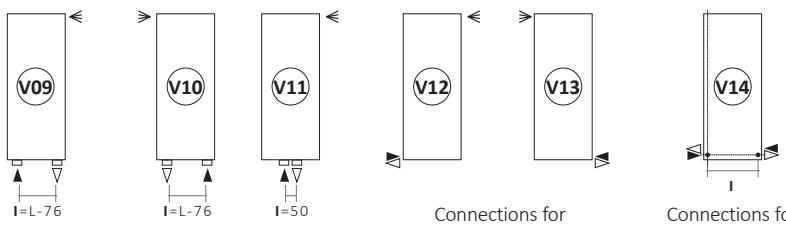

Connections for single-pipe valves.

Connections for single-pipe valves.

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

► In ▷ Out ≪ Airvent
 I Pipe Centres L Width Connection

FRAME INOX DECOR X03 VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [kg] | Surface [m²] | Water Content [lt] | Thermal output Watt $\Delta t = 50^\circ\text{C}$ | Thermal output Watt $\Delta t = 30^\circ\text{C}$ | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|--------------------------|---|---|---------------|
| | | | I [mm] | I [mm] | | | | | | |
| FRST 352 10 DDD X03 B | 352 | 276 | 168 | 7,2 | 0,75 | 2,64 | 381 | 197 | 1,2894 | |
| FRST 464 10 DDD X03 B | 464 | 388 | 280 | 9,7 | 0,98 | 3,5 | 499 | 258 | 1,2894 | |
| FRST 576 10 DDD X03 B | 576 | 500 | 392 | 12 | 1,21 | 4,4 | 617 | 319 | 1,2894 | |
| FRST 688 10 DDD X03 B | 688 | 612 | 504 | 14,6 | 1,44 | 5,2 | 735 | 380 | 1,2894 | |
| FRST 352 12 DDD X03 B | 352 | 276 | 168 | 8,6 | 0,89 | 3,02 | 455 | 236 | 1,2881 | |
| FRST 464 12 DDD X03 B | 464 | 388 | 280 | 11,4 | 1,17 | 4 | 596 | 309 | 1,2881 | |
| FRST 576 12 DDD X03 B | 576 | 500 | 392 | 14 | 1,44 | 5,1 | 736 | 381 | 1,2881 | |
| FRST 688 12 DDD X03 B | 688 | 612 | 504 | 17,2 | 1,72 | 6,1 | 877 | 454 | 1,2881 | |
| FRST 352 14 DDD X03 B | 352 | 276 | 168 | 9,9 | 1,04 | 3,5 | 529 | 274 | 1,2867 | |
| FRST 464 14 DDD X03 B | 464 | 388 | 280 | 13,2 | 1,36 | 4,6 | 692 | 359 | 1,2867 | |
| FRST 576 14 DDD X03 B | 576 | 500 | 392 | 16,5 | 1,68 | 5,9 | 856 | 444 | 1,2867 | |
| FRST 688 14 DDD X03 B | 688 | 612 | 504 | 19,8 | 2,00 | 7,00 | 1020 | 529 | 1,2867 | |
| FRST 352 16 DDD X03 B | 352 | 276 | 168 | 11,2 | 1,16 | 3,8 | 595 | 309 | 1,2854 | |
| FRST 464 16 DDD X03 B | 464 | 388 | 280 | 14,9 | 1,55 | 5,2 | 789 | 409 | 1,2854 | |
| FRST 576 16 DDD X03 B | 576 | 500 | 392 | 18,6 | 1,94 | 6,8 | 976 | 506 | 1,2854 | |
| FRST 352 18 DDD X03 B | 352 | 276 | 168 | 12,5 | 1,33 | 4,37 | 676 | 351 | 1,2840 | |
| FRST 464 18 DDD X03 B | 464 | 388 | 280 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 | |
| FRST 576 18 DDD X03 B | 576 | 500 | 392 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 | |
| FRST 688 18 DDD X03 B | 688 | 612 | 504 | 25 | 2,56 | 8,7 | 1304 | 677 | 1,2840 | |
| FRST 352 20 DDD X03 B | 352 | 276 | 168 | 13,5 | 1,47 | 4,85 | 750 | 390 | 1,2826 | |
| FRST 464 20 DDD X03 B | 464 | 388 | 280 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 | |
| FRST 576 20 DDD X03 B | 576 | 500 | 392 | 23 | 2,38 | 8 | 1222 | 635 | 1,2826 | |
| FRST 688 20 DDD X03 B | 688 | 612 | 504 | 27,6 | 2,84 | 9,6 | 1447 | 751 | 1,2826 | |

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t = 50^\circ\text{C}$ x (desired $\Delta t/50^\circ\text{C}$)ⁿ



FRAME INOX DECOR X03 PLUS VERTICAL

artwork Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with ϕ of 30 mm
Heating elements in painted carbon steel
Heating plate in stainless steel with satin décor on polished background

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME INOX PLUS DECOR X03 RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the finish | Constant value |
|----------------|---|--------------------------------|----------------------------|----------------|
| FRPL | Example: Frame radiator Plus Dimensions: mm 464x1822 | Example: connection V09 | Example: Inox Decor X03 | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a Frame INOX DECOR X03 PLUS VT 464x1822 mm radiator, with V09 connection.
The article code will be:
FRPL 464 18 V09 X03 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection ϕ 12/14/15
Art. Nr. 5991990301084

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection ϕ 12/14/15
Art. Nr. 5991990301076

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301075




Straight hanger polished for models

L. 352 (L= 404 mm)
Art. Nr. 5991990300187


L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184


L. 688 (L= 740 mm)
Art. Nr. 5991990300188

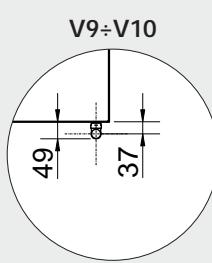

Measures for Elegant square manual valve

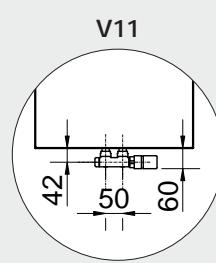

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

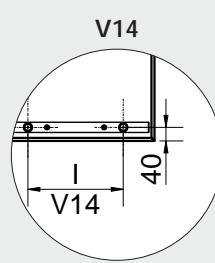

Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)



Kit 3 straight hanger polished for models



L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185



L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

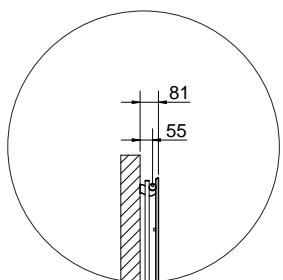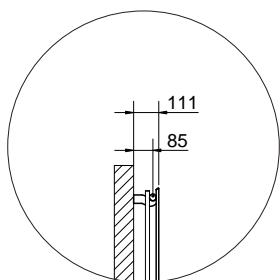V09 - V10 - V11
V12 - V13


V14

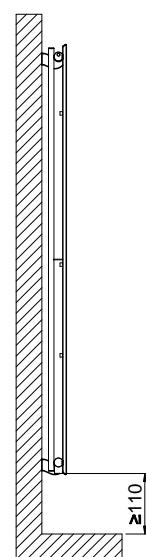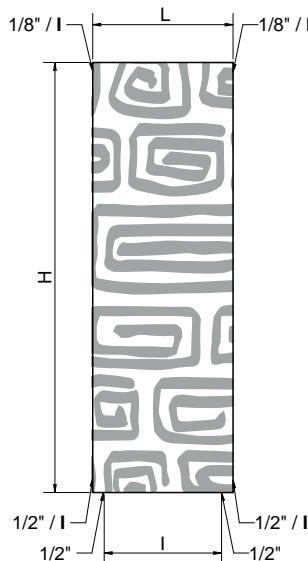POSITIONING OF
TOWEL BAR (ACCESSORIES)

| | H | H1 | H2 | H3 |
|-------------|------|-----|------|----|
| | [mm] | | | |
| 1022 | 300 | 500 | 800 | |
| 1222 | 400 | 600 | 1000 | |
| 1422 | 400 | 700 | 1200 | |
| 1622 | 500 | 800 | 1300 | |
| 1822 | 500 | 800 | 1400 | |
| 2022 | 500 | 800 | 1500 | |

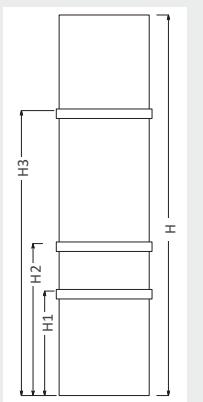

Standard connections

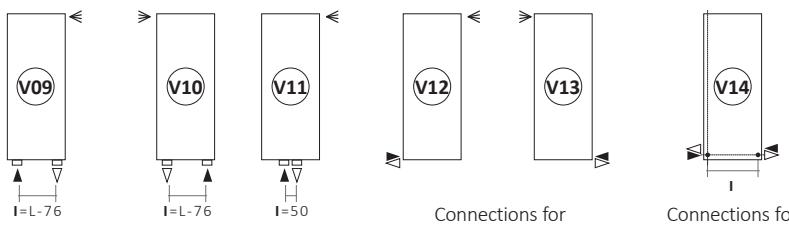

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

| | | |
|----------------|---------|--------------|
| ► In | ▷ Out | ≤ Airvent |
| I Pipe Centres | L Width | □ Connection |

FRAME INOX DECOR X03 PLUS VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [Kg] | Surface [m²] | Water Content [l/t] | Thermal output Watt $\Delta t = 50^\circ\text{C}$ | Thermal output Watt $\Delta t = 30^\circ\text{C}$ | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|---------------------------|---|---|---------------|
| | | | I [mm] | I [mm] | | | | | | |
| FRPL 352 10 DDD X03 B | 352 | 276 | 168 | 14,3 | 1,35 | 4,5 | 580 | 296 | 1,3152 | |
| FRPL 464 10 DDD X03 B | 464 | 388 | 280 | 20,2 | 1,84 | 6,3 | 790 | 404 | 1,3152 | |
| FRPL 576 10 DDD X03 B | 576 | 500 | 392 | 25,0 | 2,32 | 7,8 | 999 | 510 | 1,3152 | |
| FRPL 688 10 DDD X03 B | 688 | 612 | 504 | 28,6 | 2,81 | 9,0 | 1209 | 618 | 1,3152 | |
| FRPL 352 12 DDD X03 B | 352 | 276 | 168 | 17,1 | 1,61 | 5,3 | 691 | 353 | 1,31355 | |
| FRPL 464 12 DDD X03 B | 464 | 388 | 280 | 24,1 | 2,19 | 7,5 | 940 | 481 | 1,31355 | |
| FRPL 576 12 DDD X03 B | 576 | 500 | 392 | 29,8 | 2,77 | 9,3 | 1190 | 608 | 1,31355 | |
| FRPL 688 12 DDD X03 B | 688 | 612 | 504 | 34,2 | 3,35 | 10,7 | 1439 | 736 | 1,31355 | |
| FRPL 352 14 DDD X03 B | 352 | 276 | 168 | 19,9 | 1,86 | 6,2 | 801 | 415 | 1,2867 | |
| FRPL 464 14 DDD X03 B | 464 | 388 | 280 | 28,0 | 2,54 | 8,8 | 1091 | 565 | 1,2867 | |
| FRPL 576 14 DDD X03 B | 576 | 500 | 392 | 34,7 | 3,21 | 10,8 | 1381 | 716 | 1,2867 | |
| FRPL 688 14 DDD X03 B | 688 | 612 | 504 | 39,7 | 3,88 | 12,4 | 1670 | 865 | 1,2867 | |
| FRPL 352 16 DDD X03 B | 352 | 276 | 168 | 23,9 | 2,17 | 7,5 | 930 | 476 | 1,3117 | |
| FRPL 464 16 DDD X03 B | 464 | 388 | 280 | 31,9 | 2,89 | 10,0 | 1241 | 635 | 1,3117 | |
| FRPL 576 16 DDD X03 B | 576 | 500 | 392 | 39,8 | 3,61 | 12,5 | 1551 | 794 | 1,3117 | |
| FRPL 352 18 DDD X03 B | 352 | 276 | 168 | 25,4 | 2,38 | 7,9 | 1022 | 523 | 1,3105 | |
| FRPL 464 18 DDD X03 B | 464 | 388 | 280 | 35,7 | 3,24 | 11,2 | 1455 | 745 | 1,3105 | |
| FRPL 576 18 DDD X03 B | 576 | 500 | 392 | 45,1 | 4,10 | 13,7 | 1819 | 931 | 1,3105 | |
| FRPL 688 18 DDD X03 B | 688 | 612 | 504 | 50,8 | 4,96 | 15,9 | 2132 | 1092 | 1,3105 | |
| FRPL 352 20 DDD X03 B | 352 | 276 | 168 | 28,2 | 2,63 | 8,8 | 1133 | 580 | 1,3093 | |
| FRPL 464 20 DDD X03 B | 464 | 388 | 280 | 39,5 | 3,59 | 12,3 | 1568 | 803 | 1,3093 | |
| FRPL 576 20 DDD X03 B | 576 | 500 | 392 | 49,9 | 4,54 | 15,0 | 1960 | 1004 | 1,3093 | |
| FRPL 688 20 DDD X03 B | 688 | 612 | 504 | 56,4 | 5,49 | 17,6 | 2363 | 1211 | 1,3093 | |

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t = 50^\circ\text{C}$ x (desired $\Delta t/50^\circ\text{C}$)ⁿ



FRAME INOX DECOR X04

VERTICAL

artwork Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with ϕ of 30 mm
Heating elements in painted carbon steel
Heating plate in stainless steel with satin décor on polished background

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME INOX DECOR X04 RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|---|---|---|---|----------------|
| Radiator model Example: Frame radiator | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection V09 | Article code of the finish Example: Inox Decor X04 | Constant value |
| FRST | 464 18 | V09 | X04 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME INOX DECOR X04 VT 464x1822 mm radiator, with V09 connection.

The article code will be:

FRST 464 18 V09 X04 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection ϕ 12/14/15
Art. Nr. 5991990301084

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection ϕ 12/14/15
Art. Nr. 5991990301076

Multilayer connection ϕ 16 x2
Art. Nr. 5991990301075




Straight hanger polished for models

L. 352 (L= 404 mm)
Art. Nr. 5991990300187


L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184


L. 688 (L= 740 mm)
Art. Nr. 5991990300188

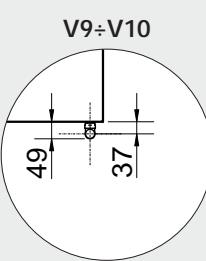

Measures for Elegant square manual valve

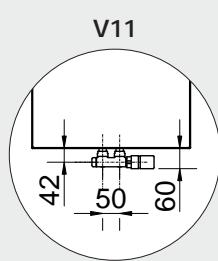

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

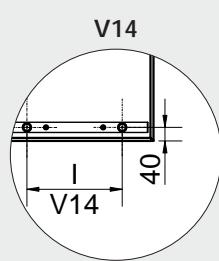

Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)



Kit 3 straight hanger polished for models



L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185



L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

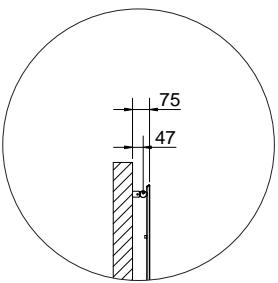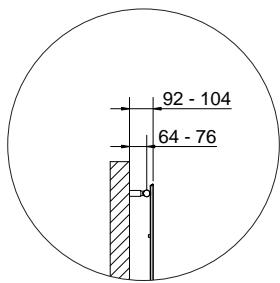V09 - V10 - V11
V12 - V13


V14

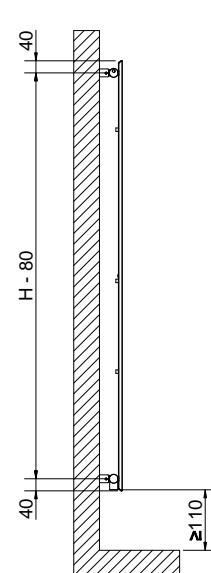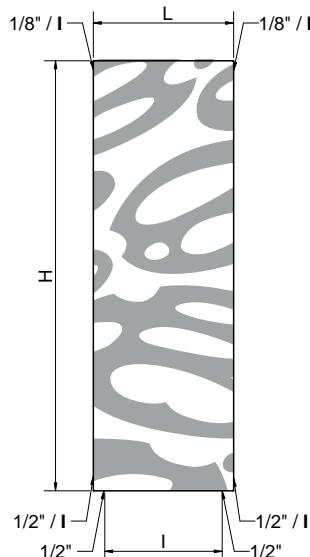POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

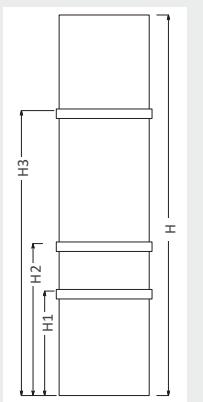

Standard connections

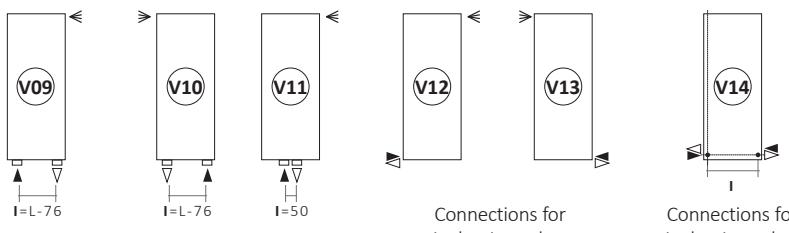

Connections for single-pipe valves.

Connections for single-pipe valves.

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

► In ▷ Out ≪ Airvent
 I Pipe Centres L Width Connection

FRAME INOX DECOR X04 VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [kg] | Surface [m²] | Water Content [lt] | Thermal output Watt $\Delta t = 50^\circ\text{C}$ | $\Delta t = 30^\circ\text{C}$ | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|--------------------------|---|-------------------------------|---------------|
| | | | I [mm] | I [mm] | | | | | | |
| FRST 352 10 DDD X04 B | 352 | 276 | 168 | 7,2 | 0,75 | 2,64 | 381 | 197 | 1,2894 | |
| FRST 464 10 DDD X04 B | 464 | 388 | 280 | 9,7 | 0,98 | 3,5 | 499 | 258 | 1,2894 | |
| FRST 576 10 DDD X04 B | 576 | 500 | 392 | 12 | 1,21 | 4,4 | 617 | 319 | 1,2894 | |
| FRST 688 10 DDD X04 B | 688 | 612 | 504 | 14,6 | 1,44 | 5,2 | 735 | 380 | 1,2894 | |
| FRST 352 12 DDD X04 B | 352 | 276 | 168 | 8,6 | 0,89 | 3,02 | 455 | 236 | 1,2881 | |
| FRST 464 12 DDD X04 B | 464 | 388 | 280 | 11,4 | 1,17 | 4 | 596 | 309 | 1,2881 | |
| FRST 576 12 DDD X04 B | 576 | 500 | 392 | 14 | 1,44 | 5,1 | 736 | 381 | 1,2881 | |
| FRST 688 12 DDD X04 B | 688 | 612 | 504 | 17,2 | 1,72 | 6,1 | 877 | 454 | 1,2881 | |
| FRST 352 14 DDD X04 B | 352 | 276 | 168 | 9,9 | 1,04 | 3,5 | 529 | 274 | 1,2867 | |
| FRST 464 14 DDD X04 B | 464 | 388 | 280 | 13,2 | 1,36 | 4,6 | 692 | 359 | 1,2867 | |
| FRST 576 14 DDD X04 B | 576 | 500 | 392 | 16,5 | 1,68 | 5,9 | 856 | 444 | 1,2867 | |
| FRST 688 14 DDD X04 B | 688 | 612 | 504 | 19,8 | 2,00 | 7,00 | 1020 | 529 | 1,2867 | |
| FRST 352 16 DDD X04 B | 352 | 276 | 168 | 11,2 | 1,16 | 3,8 | 595 | 309 | 1,2854 | |
| FRST 464 16 DDD X04 B | 464 | 388 | 280 | 14,9 | 1,55 | 5,2 | 789 | 409 | 1,2854 | |
| FRST 576 16 DDD X04 B | 576 | 500 | 392 | 18,6 | 1,94 | 6,8 | 976 | 506 | 1,2854 | |
| FRST 352 18 DDD X04 B | 352 | 276 | 168 | 12,5 | 1,33 | 4,37 | 676 | 351 | 1,2840 | |
| FRST 464 18 DDD X04 B | 464 | 388 | 280 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 | |
| FRST 576 18 DDD X04 B | 576 | 500 | 392 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 | |
| FRST 688 18 DDD X04 B | 688 | 612 | 504 | 25 | 2,56 | 8,7 | 1304 | 677 | 1,2840 | |
| FRST 352 20 DDD X04 B | 352 | 276 | 168 | 13,5 | 1,47 | 4,85 | 750 | 390 | 1,2826 | |
| FRST 464 20 DDD X04 B | 464 | 388 | 280 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 | |
| FRST 576 20 DDD X04 B | 576 | 500 | 392 | 23 | 2,38 | 8 | 1222 | 635 | 1,2826 | |
| FRST 688 20 DDD X04 B | 688 | 612 | 504 | 27,6 | 2,84 | 9,6 | 1447 | 751 | 1,2826 | |

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t = 50^\circ\text{C}$ x (desired $\Delta t/50^\circ\text{C}$)ⁿ



FRAME INOX DECOR X04 PLUS VERTICAL

artwork Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in stainless steel with satin décor on polished background

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing. Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME INOX PLUS DECOR X04 RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/finish | Constant value |
|----------------|---------------------|--------------------------------|-----------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the finish | Constant value |
|----------------|---------------------|--------------------------------|----------------------------|----------------|
| FRPL | 464 18 | V09 | X04 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME INOX PLUS DECOR VT 464x1822 mm radiator, with V09 connection.

The article code will be:

FRPL 464 18 V09 X04 B

ACCESSORIES



Elegant square manual polished valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990301084

Multilayer connection Ø 16 x2
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990301076

Multilayer connection Ø 16 x2
Art. Nr. 5991990301075




Straight hanger polished for models

L. 352 (L= 404 mm)
Art. Nr. 5991990300187


L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184


L. 688 (L= 740 mm)
Art. Nr. 5991990300188

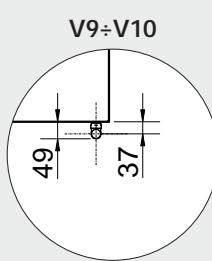

Measures for Elegant square manual valve

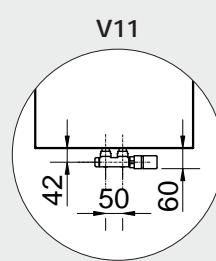

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

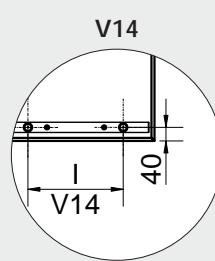

Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)



Kit 3 straight hanger polished for models



L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185



L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

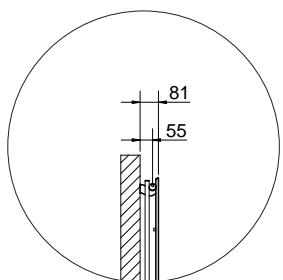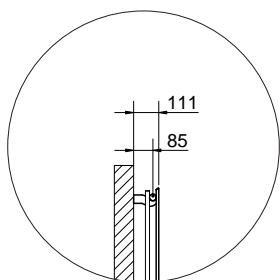V09 - V10 - V11
V12 - V13


V14

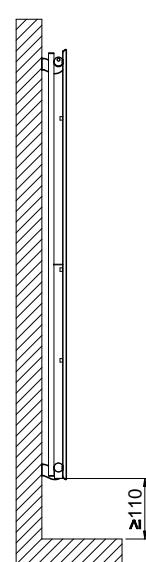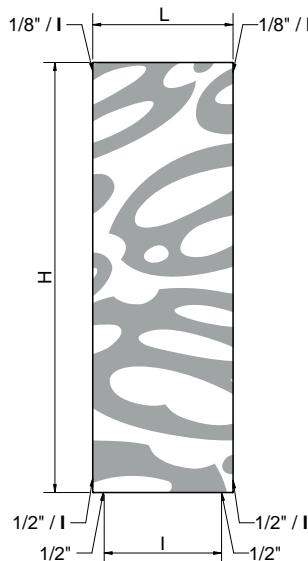POSITIONING OF
TOWEL BAR (ACCESSORIES)

| | H | H1 | H2 | H3 |
|-------------|------|-----|------|----|
| | [mm] | | | |
| 1022 | 300 | 500 | 800 | |
| 1222 | 400 | 600 | 1000 | |
| 1422 | 400 | 700 | 1200 | |
| 1622 | 500 | 800 | 1300 | |
| 1822 | 500 | 800 | 1400 | |
| 2022 | 500 | 800 | 1500 | |

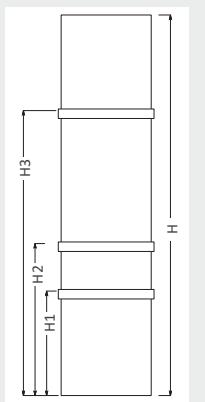

Standard connections

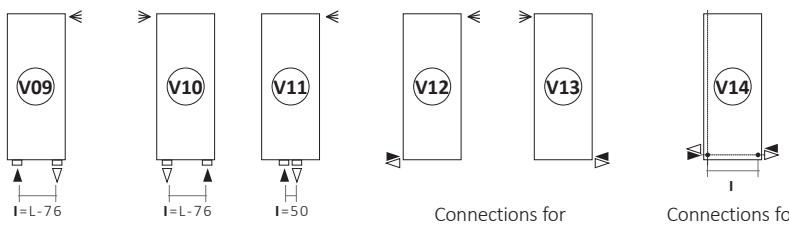

Connections for single-pipe valves.

Connections for single-pipe valves.

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

► In ▷ Out ≪ Airvent
 █ Pipe Centres L Width □ Connection

FRAME INOX DECOR X04 PLUS VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [Kg] | Surface [m²] | Water Content [l/t] | Thermal output Watt $\Delta t = 50^\circ\text{C}$ | Thermal output Watt $\Delta t = 30^\circ\text{C}$ | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|---------------------------|---|---|---------------|
| | | | I [mm] | I [mm] | | | | | | |
| FRPL 352 10 DDD X04 B | 352 | 276 | 168 | 14,3 | 1,35 | 4,5 | 580 | 296 | 1,3152 | |
| FRPL 464 10 DDD X04 B | 464 | 388 | 280 | 20,2 | 1,84 | 6,3 | 790 | 404 | 1,3152 | |
| FRPL 576 10 DDD X04 B | 576 | 500 | 392 | 25,0 | 2,32 | 7,8 | 999 | 510 | 1,3152 | |
| FRPL 688 10 DDD X04 B | 688 | 612 | 504 | 28,6 | 2,81 | 9,0 | 1209 | 618 | 1,3152 | |
| FRPL 352 12 DDD X04 B | 352 | 276 | 168 | 17,1 | 1,61 | 5,3 | 691 | 353 | 1,31355 | |
| FRPL 464 12 DDD X04 B | 464 | 388 | 280 | 24,1 | 2,19 | 7,5 | 940 | 481 | 1,31355 | |
| FRPL 576 12 DDD X04 B | 576 | 500 | 392 | 29,8 | 2,77 | 9,3 | 1190 | 608 | 1,31355 | |
| FRPL 688 12 DDD X04 B | 688 | 612 | 504 | 34,2 | 3,35 | 10,7 | 1439 | 736 | 1,31355 | |
| FRPL 352 14 DDD X04 B | 352 | 276 | 168 | 19,9 | 1,86 | 6,2 | 801 | 415 | 1,2867 | |
| FRPL 464 14 DDD X04 B | 464 | 388 | 280 | 28,0 | 2,54 | 8,8 | 1091 | 565 | 1,2867 | |
| FRPL 576 14 DDD X04 B | 576 | 500 | 392 | 34,7 | 3,21 | 10,8 | 1381 | 716 | 1,2867 | |
| FRPL 688 14 DDD X04 B | 688 | 612 | 504 | 39,7 | 3,88 | 12,4 | 1670 | 865 | 1,2867 | |
| FRPL 352 16 DDD X04 B | 352 | 276 | 168 | 23,9 | 2,17 | 7,5 | 930 | 476 | 1,3117 | |
| FRPL 464 16 DDD X04 B | 464 | 388 | 280 | 31,9 | 2,89 | 10,0 | 1241 | 635 | 1,3117 | |
| FRPL 576 16 DDD X04 B | 576 | 500 | 392 | 39,8 | 3,61 | 12,5 | 1551 | 794 | 1,3117 | |
| FRPL 352 18 DDD X04 B | 352 | 276 | 168 | 25,4 | 2,38 | 7,9 | 1022 | 523 | 1,3105 | |
| FRPL 464 18 DDD X04 B | 464 | 388 | 280 | 35,7 | 3,24 | 11,2 | 1455 | 745 | 1,3105 | |
| FRPL 576 18 DDD X04 B | 576 | 500 | 392 | 45,1 | 4,10 | 13,7 | 1819 | 931 | 1,3105 | |
| FRPL 688 18 DDD X04 B | 688 | 612 | 504 | 50,8 | 4,96 | 15,9 | 2132 | 1092 | 1,3105 | |
| FRPL 352 20 DDD X04 B | 352 | 276 | 168 | 28,2 | 2,63 | 8,8 | 1133 | 580 | 1,3093 | |
| FRPL 464 20 DDD X04 B | 464 | 388 | 280 | 39,5 | 3,59 | 12,3 | 1568 | 803 | 1,3093 | |
| FRPL 576 20 DDD X04 B | 576 | 500 | 392 | 49,9 | 4,54 | 15,0 | 1960 | 1004 | 1,3093 | |
| FRPL 688 20 DDD X04 B | 688 | 612 | 504 | 56,4 | 5,49 | 17,6 | 2363 | 1211 | 1,3093 | |

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t = 50^\circ\text{C}$ x (desired $\Delta t/50^\circ\text{C}$)ⁿ



FRAME VERTICAL



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in painted carbon steel

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------|--------------------------------|---|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|---|---|---|--|----------------|
| Radiator model Example: Frame radiator | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection V09 | Article code of the finish Example: White color R01 | Constant value |
| FRST | 464 18 | V09 | R01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME VT 464x1822 mm radiator, with V09 connection.
The article code will be:
FRST 464 18 V09 R01 B

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242



KIT 3 Towel bars PAINTED for models

L. 352 (L= 404 mm)
Art. Nr. 5991990310569

L. 464 (L= 516 mm)
Art. Nr. 5991990310570

L. 576 (L= 628 mm)
Art. Nr. 5991990310571

L. 688 (L= 740 mm)
Art. Nr. 5991990310572

LYNEA ACCESSORIES by Marco Pisati

Others accessories Lynea from page 290.



Towel bar left
L. 274 mm

H30 Green Apple

Art. Nr. 5991990332190



Hook
L. 180 mm x H. 270 mm

H30 Green Apple

Art. Nr. 5991990310604





Wood shelf
L. 286 mm



Oak Moka Textured

Art. Nr. 5991990500014


Accessories and spare parts - see from page 366.

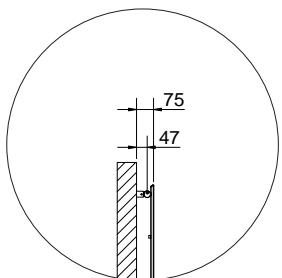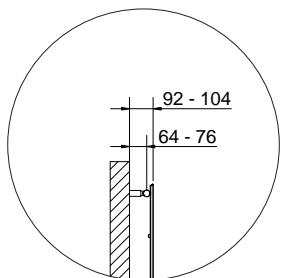V09 - V10 - V11
V12 - V13


V14

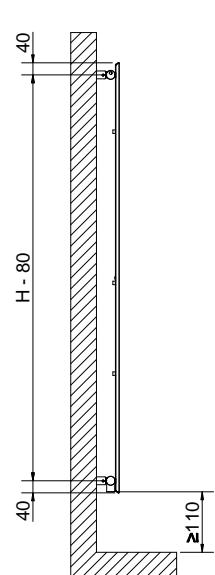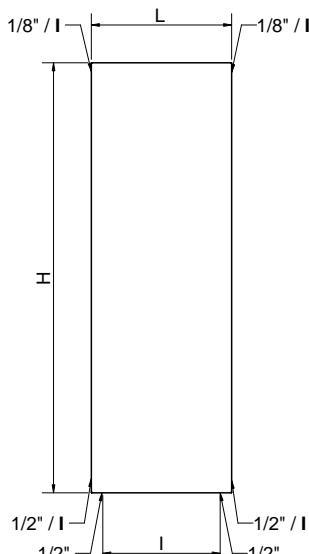POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

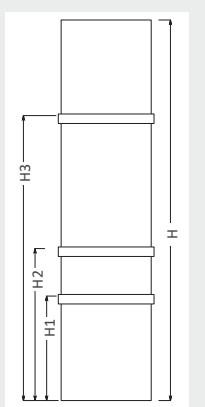

Standard connections

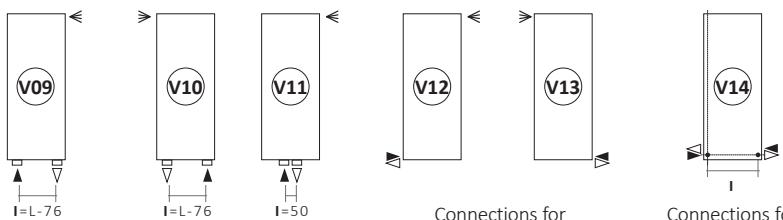

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

| | | |
|----------------|---------|--------------|
| ► In | ▷ Out | ≤ Airvent |
| I Pipe Centres | L Width | □ Connection |

FRAME VERTICAL

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight [Kg] | Surface [m²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|------------------|-----------------|----------------------------|-----------------------|-----------------------|-----------------|--------------------------|------------------------|--------|---------------|
| | | | I [mm] | I [mm] | Δt = 50°C | Δt = 30°C | Δt = 50°C | | | |
| FRST 352 10 DDD R01 B | 352 | 276 | 168 | 7,2 | 0,75 | 2,64 | 381 | 197 | 1,2894 | |
| FRST 464 10 DDD R01 B | 464 | 388 | 280 | 9,7 | 0,98 | 3,5 | 499 | 258 | 1,2894 | |
| FRST 576 10 DDD R01 B | 576 | 500 | 392 | 12 | 1,21 | 4,4 | 617 | 319 | 1,2894 | |
| FRST 688 10 DDD R01 B | 688 | 612 | 504 | 14,6 | 1,44 | 5,2 | 735 | 380 | 1,2894 | |
| FRST 352 12 DDD R01 B | 352 | 276 | 168 | 8,6 | 0,89 | 3,02 | 455 | 236 | 1,2881 | |
| FRST 464 12 DDD R01 B | 464 | 388 | 280 | 11,4 | 1,17 | 4 | 596 | 309 | 1,2881 | |
| FRST 576 12 DDD R01 B | 576 | 500 | 392 | 14 | 1,44 | 5,1 | 736 | 381 | 1,2881 | |
| FRST 688 12 DDD R01 B | 688 | 612 | 504 | 17,2 | 1,72 | 6,1 | 877 | 454 | 1,2881 | |
| FRST 352 14 DDD R01 B | 352 | 276 | 168 | 9,9 | 1,04 | 3,5 | 529 | 274 | 1,2867 | |
| FRST 464 14 DDD R01 B | 464 | 388 | 280 | 13,2 | 1,36 | 4,6 | 692 | 359 | 1,2867 | |
| FRST 576 14 DDD R01 B | 576 | 500 | 392 | 16,5 | 1,68 | 5,9 | 856 | 444 | 1,2867 | |
| FRST 688 14 DDD R01 B | 688 | 612 | 504 | 19,8 | 2,00 | 7,00 | 1020 | 529 | 1,2867 | |
| FRST 352 16 DDD R01 B | 352 | 276 | 168 | 11,2 | 1,16 | 3,8 | 595 | 309 | 1,2854 | |
| FRST 464 16 DDD R01 B | 464 | 388 | 280 | 14,9 | 1,55 | 5,2 | 789 | 409 | 1,2854 | |
| FRST 576 16 DDD R01 B | 576 | 500 | 392 | 18,6 | 1,94 | 6,8 | 976 | 506 | 1,2854 | |
| FRST 352 18 DDD R01 B | 352 | 276 | 168 | 12,5 | 1,33 | 4,37 | 676 | 351 | 1,2840 | |
| FRST 464 18 DDD R01 B | 464 | 388 | 280 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 | |
| FRST 576 18 DDD R01 B | 576 | 500 | 392 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 | |
| FRST 688 18 DDD R01 B | 688 | 612 | 504 | 25 | 2,56 | 8,7 | 1304 | 677 | 1,2840 | |
| FRST 352 20 DDD R01 B | 352 | 276 | 168 | 13,5 | 1,47 | 4,85 | 750 | 390 | 1,2826 | |
| FRST 464 20 DDD R01 B | 464 | 388 | 280 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 | |
| FRST 576 20 DDD R01 B | 576 | 500 | 392 | 23 | 2,38 | 8 | 1222 | 635 | 1,2826 | |
| FRST 688 20 DDD R01 B | 688 | 612 | 504 | 27,6 | 2,84 | 9,6 | 1447 | 751 | 1,2826 | |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



FRAME PLUS VERTICAL



page 121

5 YEARS WARRANTY

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in painted carbon steel

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME PLUS RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------|--------------------------------|---|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|--|---|---|--|----------------|
| Radiator model Example: Frame radiator Plus | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection V09 | Article code of the finish Example: White color R01 | Constant value |
| FRPL | 464 18 | V09 | R01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME PLUS VT 464x1822 mm radiator, with V09 connection.
The article code will be:
FRPL 464 18 V09 R01 B

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Towel bar painted for models

L. 352 (L= 404 mm)

Art. Nr. 5991990310565

L. 464 (L= 516 mm)


Art. Nr. 5991990310566

L. 576 (L= 628 mm)

Art. Nr. 5991990310567

L. 688 (L= 740 mm)

Art. Nr. 5991990310568

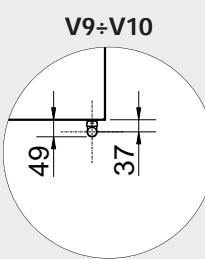

Measures for Elegant square manual valve



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242



Kit 3 straight hanger polished for models

L. 352 (L= 404 mm)

Art. Nr. 5991990300189

L. 464 (L= 516 mm)

Art. Nr. 5991990300185



L. 576 (L= 628 mm)

Art. Nr. 5991990300186



L. 688 (L= 740 mm)

Art. Nr. 5991990300190


Accessories and spare parts - see from page 366.

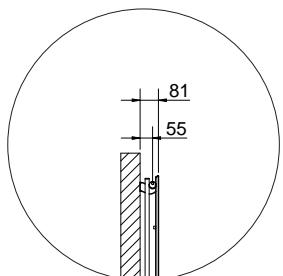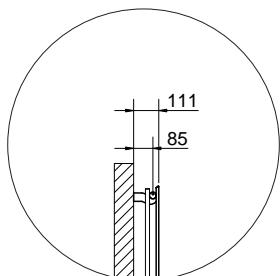V09 - V10 - V11
V12 - V13


V14

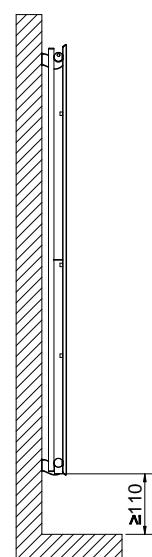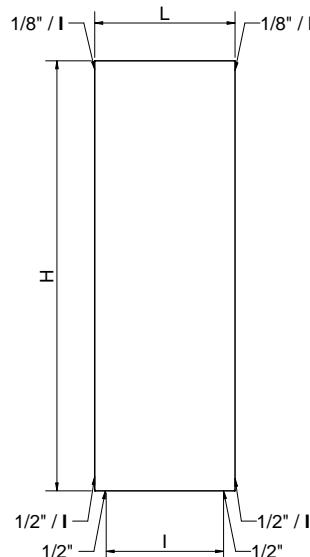POSITIONING OF
TOWEL BAR (ACCESSORIES)

| | H | H1 | H2 | H3 |
|-------------|------|-----|------|----|
| | [mm] | | | |
| 1022 | 300 | 500 | 800 | |
| 1222 | 400 | 600 | 1000 | |
| 1422 | 400 | 700 | 1200 | |
| 1622 | 500 | 800 | 1300 | |
| 1822 | 500 | 800 | 1400 | |
| 2022 | 500 | 800 | 1500 | |

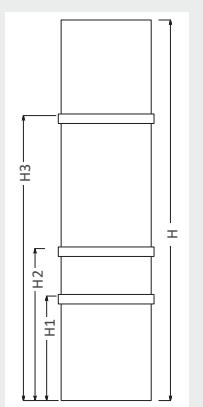

Standard connections

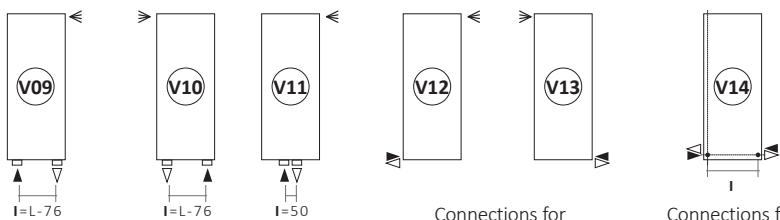

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

| | | |
|----------------|---------|--------------|
| ► In | ▷ Out | ≤ Airvent |
| ▀ Pipe Centres | ▀ Width | ▀ Connection |

DDD: replace with the type of connection.

FRAME PLUS VERTICAL

| Art. Nr. | Height | Width | Pipe Centres | Pipe Centres | Dry | Surface | Water Content | Thermal output | Exponent n |
|-----------------------|-------------|-------|--------------|--------------|--------|---------|---------------|----------------|------------|
| | | | (V09- V10) | (V14) | Weight | | | Watt | |
| FRPL 352 10 DDD R01 B | 1022 | 352 | 276 | 168 | 14,3 | 1,35 | 4,5 | 580 | 296 |
| FRPL 464 10 DDD R01 B | | 464 | 388 | 280 | 20,2 | 1,84 | 6,3 | 790 | 404 |
| FRPL 576 10 DDD R01 B | | 576 | 500 | 392 | 25,0 | 2,32 | 7,8 | 999 | 510 |
| FRPL 688 10 DDD R01 B | | 688 | 612 | 504 | 28,6 | 2,81 | 9,0 | 1209 | 618 |
| FRPL 352 12 DDD R01 B | 1222 | 352 | 276 | 168 | 17,1 | 1,61 | 5,3 | 691 | 353 |
| FRPL 464 12 DDD R01 B | | 464 | 388 | 280 | 24,1 | 2,19 | 7,5 | 940 | 481 |
| FRPL 576 12 DDD R01 B | | 576 | 500 | 392 | 29,8 | 2,77 | 9,3 | 1190 | 608 |
| FRPL 688 12 DDD R01 B | | 688 | 612 | 504 | 34,2 | 3,35 | 10,7 | 1439 | 736 |
| FRPL 352 14 DDD R01 B | 1422 | 352 | 276 | 168 | 19,9 | 1,86 | 6,2 | 801 | 415 |
| FRPL 464 14 DDD R01 B | | 464 | 388 | 280 | 28,0 | 2,54 | 8,8 | 1091 | 565 |
| FRPL 576 14 DDD R01 B | | 576 | 500 | 392 | 34,7 | 3,21 | 10,8 | 1381 | 716 |
| FRPL 688 14 DDD R01 B | | 688 | 612 | 504 | 39,7 | 3,88 | 12,4 | 1670 | 865 |
| FRPL 352 16 DDD R01 B | 1622 | 352 | 276 | 168 | 23,9 | 2,17 | 7,5 | 930 | 476 |
| FRPL 464 16 DDD R01 B | | 464 | 388 | 280 | 31,9 | 2,89 | 10,0 | 1241 | 635 |
| FRPL 576 16 DDD R01 B | | 576 | 500 | 392 | 39,8 | 3,61 | 12,5 | 1551 | 794 |
| FRPL 688 16 DDD R01 B | | 688 | 612 | 504 | 25,4 | 2,38 | 7,9 | 1022 | 523 |
| FRPL 352 18 DDD R01 B | 1822 | 352 | 276 | 168 | 35,7 | 3,24 | 11,2 | 1455 | 745 |
| FRPL 464 18 DDD R01 B | | 464 | 388 | 280 | 45,1 | 4,10 | 13,7 | 1819 | 931 |
| FRPL 576 18 DDD R01 B | | 576 | 500 | 392 | 50,8 | 4,96 | 15,9 | 2132 | 1092 |
| FRPL 688 18 DDD R01 B | | 688 | 612 | 504 | 28,2 | 2,63 | 8,8 | 1133 | 580 |
| FRPL 352 20 DDD R01 B | 2022 | 352 | 276 | 168 | 39,5 | 3,59 | 12,3 | 1568 | 803 |
| FRPL 464 20 DDD R01 B | | 464 | 388 | 280 | 49,9 | 4,54 | 15,0 | 1960 | 1004 |
| FRPL 576 20 DDD R01 B | | 576 | 500 | 392 | 56,4 | 5,49 | 17,6 | 2363 | 1211 |
| FRPL 688 20 DDD R01 B | | 688 | 612 | 504 | 26,3 | 3,33 | 10,0 | 13093 | 13093 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired $\Delta t/50$)^n



FRAME HORIZONTAL



page 122

**5 YEARS
WARRANTY**

MATERIAL:

Vertical collectors in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in painted carbon steel

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

HOW TO ORDER THE HORIZONTAL FRAME

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------|--------------------------------|---|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|---|---|---|--|----------------|
| Radiator model Example: Frame radiator | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection H01 | Article code of the finish Example: White color R01 | Constant value |
| FRST | 464 18 | H01 | R01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME OR white 464x1822 mm, with H01 connection.

The article code will be:

FRST 464 18 H01 R01 B

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552

FRAME HORIZONTAL with wall-fit thermostatic valve



Manual wall-fit valves

WALL-FIT VALVES
Art. Nr. 5991990311226

Fitting for wall-fit valves
Copper connection Ø 12/14/15
Art. Nr. 5991170300001



Fitting for wall-fit valves
Multilayer connection Ø 16 x2
Art. Nr. 5991170300002

LYNEA ACCESSORIES

by Marco Pisati

Others accessories Lynea from page 290.

Accessories and spare parts- see from page 371.



Wood TOP SHELF L. 800 mm

Whitened oak

Art. Nr. 5991990500031



Wood BOTTOM SHELF L. 800 mm

Whitened oak


Art. Nr. 5991990500034

Adjustable shelves

Accessories and spare parts- see from page 366.

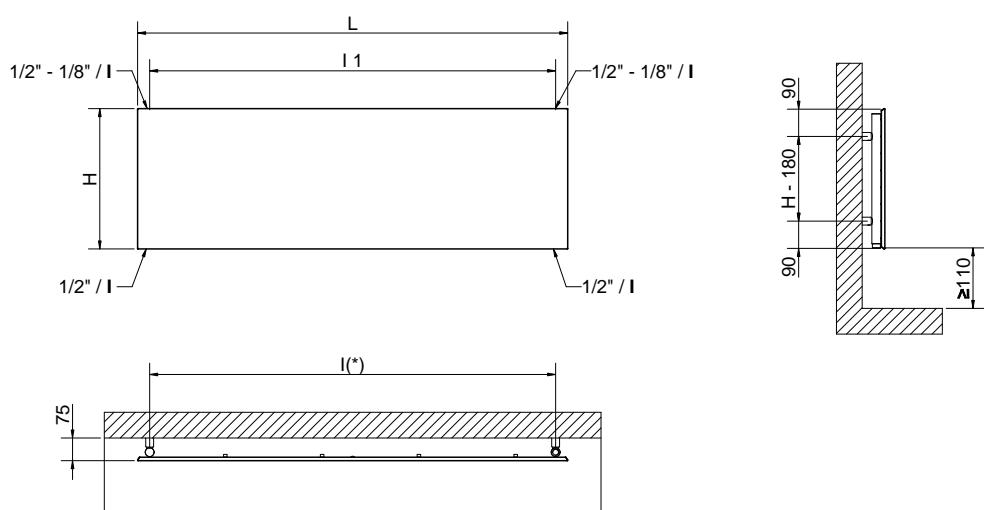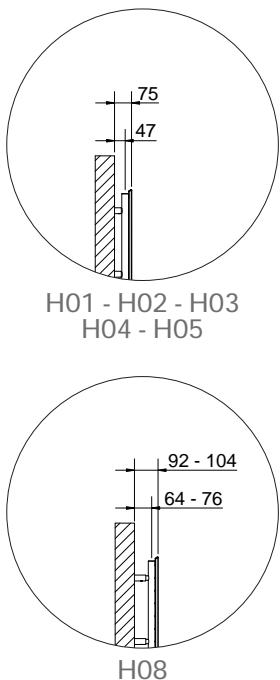

Standard connections

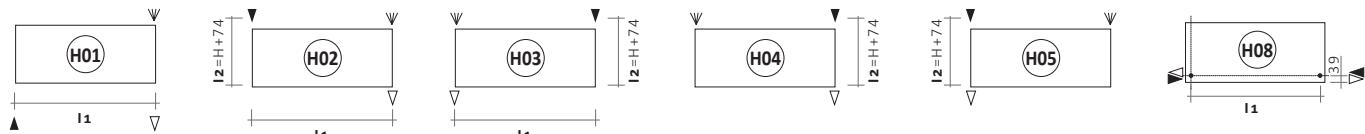

Always specify the kind of connection needed when ordering (from H1 to H8).

I2: valid only for Elegant Cordivari square valves.

Legend = ► In ▷ Out ⇐ Airvent H Height | Pipe Centres L Width □ Connection

FRAME HORIZONTAL

| Art. Nr. | Width | Height | Pipe Centres | | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|-----------------------|-------------|--------|------------------|------------------|------------|---------|---------------|---------------------|-----------|------------|
| | | | (H01-H02-H03-H8) | (H02-H03-H04-H5) | | | | Δt = 50°C | Δt = 30°C | |
| FRST 352 10 DDD R01 B | | 352 | 942 | 432 | 7,2 | 0,75 | 2,64 | 381 | 197 | 1,2894 |
| FRST 464 10 DDD R01 B | 1022 | 464 | 942 | 544 | 9,7 | 0,98 | 3,5 | 499 | 258 | 1,2894 |
| FRST 576 10 DDD R01 B | | 576 | 942 | 649 | 12,0 | 1,21 | 4,4 | 617 | 319 | 1,2894 |
| FRST 688 10 DDD R01 B | | 688 | 942 | 768 | 14,6 | 1,44 | 5,2 | 735 | 380 | 1,2894 |
| FRST 352 12 DDD R01 B | | 352 | 1142 | 432 | 8,6 | 0,89 | 3,02 | 455 | 236 | 1,2881 |
| FRST 464 12 DDD R01 B | 1222 | 464 | 1142 | 544 | 11,4 | 1,17 | 4,0 | 596 | 309 | 1,2881 |
| FRST 576 12 DDD R01 B | | 576 | 1142 | 649 | 14,0 | 1,44 | 5,1 | 736 | 381 | 1,2881 |
| FRST 688 12 DDD R01 B | | 688 | 1142 | 768 | 17,2 | 1,72 | 6,1 | 877 | 454 | 1,2881 |
| FRST 352 14 DDD R01 B | | 352 | 1342 | 432 | 9,9 | 1,04 | 3,5 | 529 | 274 | 1,2867 |
| FRST 464 14 DDD R01 B | 1422 | 464 | 1342 | 544 | 13,2 | 1,36 | 4,6 | 692 | 359 | 1,2867 |
| FRST 576 14 DDD R01 B | | 576 | 1342 | 649 | 16,5 | 1,68 | 5,9 | 856 | 444 | 1,2867 |
| FRST 688 14 DDD R01 B | | 688 | 1342 | 768 | 19,8 | 2,00 | 7,0 | 1020 | 529 | 1,2867 |
| FRST 352 16 DDD R01 B | | 352 | 1542 | 432 | 11,2 | 1,16 | 3,8 | 595 | 309 | 1,2854 |
| FRST 464 16 DDD R01 B | 1622 | 464 | 1542 | 544 | 14,9 | 1,55 | 5,2 | 789 | 409 | 1,2854 |
| FRST 576 16 DDD R01 B | | 576 | 1542 | 649 | 18,6 | 1,94 | 6,8 | 976 | 506 | 1,2854 |
| FRST 352 18 DDD R01 B | | 352 | 1742 | 432 | 12,5 | 1,33 | 4,37 | 676 | 351 | 1,2840 |
| FRST 464 18 DDD R01 B | 1822 | 464 | 1742 | 544 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 |
| FRST 576 18 DDD R01 B | | 576 | 1742 | 649 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 |
| FRST 688 18 DDD R01 B | | 688 | 1742 | 768 | 25,0 | 2,56 | 8,7 | 1304 | 677 | 1,2840 |
| FRST 352 20 DDD R01 B | | 352 | 1942 | 432 | 13,5 | 1,47 | 4,85 | 750 | 390 | 1,2826 |
| FRST 464 20 DDD R01 B | 2022 | 464 | 1942 | 544 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 |
| FRST 576 20 DDD R01 B | | 576 | 1942 | 649 | 23,0 | 2,38 | 8,0 | 1222 | 635 | 1,2826 |
| FRST 688 20 DDD R01 B | | 688 | 1942 | 768 | 27,6 | 2,84 | 9,6 | 1447 | 751 | 1,2826 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



FRAME MAX VERTICAL



page 124

**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in painted carbon steel

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE VERTICAL FRAME MAX RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Article code of the colour/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------|--------------------------------|---|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|---|---|---|--|----------------|
| Radiator model Example: Frame radiator Max | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection V11 | Article code of the finish Example: White color R01 | Constant value |
| FRMX | 464 18 | V11 | R01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME MAX 464x1822 mm, with V11 connection.

The article code will be:

FRMX 464 18 V11 R01 B

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990310543


Multilayer connection Ø 16 x2
Art. Nr. 5991990310542



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242

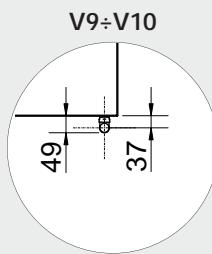

V9÷V10

Measures for Elegant square manual valve



Pipe covering kit for polished valves

Art. Nr. 5103000000044



Towel bar painted for models
L. 352 (L= 404 mm)
Art. Nr. 5991990310565

L. 464 (L= 516 mm)
Art. Nr. 5991990310566





L. 576 (L= 628 mm)
Art. Nr. 5991990310567

L. 688 (L= 740 mm)
Art. Nr. 5991990310568

Accessories and spare parts - see from page 366.

POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

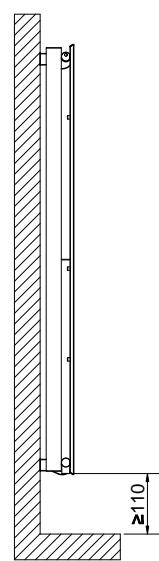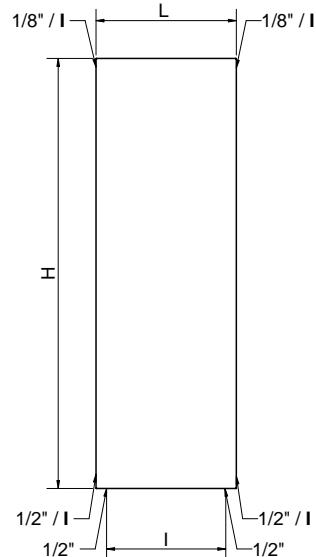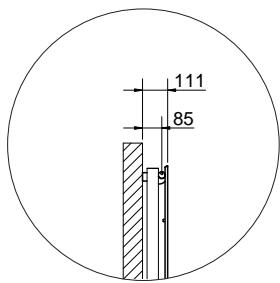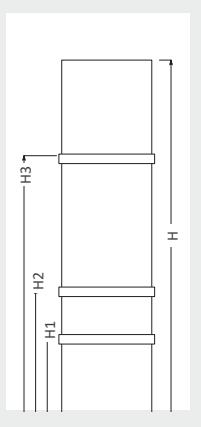


SIDE COVER FRAME MAX

| Art. Nr. | Height H [mm] |
|---------------|------------------|
| 5103000000130 | 1022 |
| 5103000000131 | 1222 |
| 5103000000132 | 1422 |
| 5103000000133 | 1622 |
| 5103000000134 | 1822 |
| 5103000000135 | 2022 |



Art. Nr. are referred to WHITE R01 colour version.
For other colours price has to be increased by 30%.

Standard connections

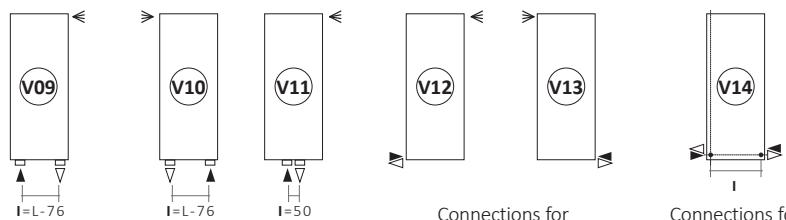Connections for
single-pipe valves.Connections for
single-pipe valves.

Always specify the kind of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =
 ► In ▷ Out ≪ Airvent
 ┌ Pipe Centres ─ Width ─ Connection

DDD: replace with the type of connection.

FRAME MAX VERTICAL

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres | | Dry Weight [Kg] | Surface [m²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|------------------|-----------------|--------------|-------|-----------------------|-----------------|--------------------------|------------------------|-----------|---------------|
| | | | (V09- V10) | (V14) | | | | Δt = 50°C | Δt = 30°C | |
| FRMX 352 10 DDD R01 B | 352 | 282 | 168 | 18,2 | 2,238 | 7,8 | 811 | 413 | 1,31970 | |
| FRMX 464 10 DDD R01 B | 464 | 394 | 280 | 24,2 | 2,984 | 10,4 | 1081 | 551 | 1,31970 | |
| FRMX 576 10 DDD R01 B | 576 | 506 | 392 | 30,2 | 3,73 | 13,0 | 1352 | 689 | 1,31970 | |
| FRMX 688 10 DDD R01 B | 688 | 618 | 504 | 36,2 | 4,476 | 15,5 | 1622 | 827 | 1,31970 | |
| FRMX 352 12 DDD R01 B | 352 | 282 | 168 | 23,5 | 2,67 | 9,0 | 948 | 483 | 1,31910 | |
| FRMX 464 12 DDD R01 B | 464 | 394 | 280 | 31,3 | 3,56 | 11,9 | 1265 | 645 | 1,31910 | |
| FRMX 576 12 DDD R01 B | 576 | 506 | 392 | 39,0 | 4,45 | 14,9 | 1581 | 806 | 1,31910 | |
| FRMX 688 12 DDD R01 B | 688 | 618 | 504 | 46,7 | 5,34 | 17,9 | 1897 | 967 | 1,31910 | |
| FRMX 352 14 DDD R01 B | 352 | 282 | 168 | 28,9 | 3,102 | 10,1 | 1082 | 552 | 1,31850 | |
| FRMX 464 14 DDD R01 B | 464 | 394 | 280 | 38,3 | 4,136 | 13,5 | 1443 | 736 | 1,31850 | |
| FRMX 576 14 DDD R01 B | 576 | 506 | 392 | 47,8 | 5,17 | 16,9 | 1804 | 920 | 1,31850 | |
| FRMX 688 14 DDD R01 B | 688 | 618 | 504 | 57,3 | 6,204 | 20,3 | 2164 | 1104 | 1,31850 | |
| FRMX 352 16 DDD R01 B | 352 | 282 | 168 | 34,2 | 3,534 | 11,3 | 1213 | 619 | 1,31790 | |
| FRMX 464 16 DDD R01 B | 464 | 394 | 280 | 45,4 | 4,712 | 15,1 | 1617 | 825 | 1,31790 | |
| FRMX 576 16 DDD R01 B | 576 | 506 | 392 | 56,6 | 5,89 | 18,9 | 2021 | 1031 | 1,31790 | |
| FRMX 352 18 DDD R01 B | 352 | 282 | 168 | 39,5 | 3,966 | 12,5 | 1341 | 677 | 1,33750 | |
| FRMX 464 18 DDD R01 B | 464 | 394 | 280 | 52,4 | 5,288 | 16,7 | 1788 | 902 | 1,33810 | |
| FRMX 576 18 DDD R01 B | 576 | 506 | 392 | 65,4 | 6,61 | 20,8 | 2234 | 1128 | 1,33810 | |
| FRMX 688 18 DDD R01 B | 688 | 618 | 504 | 78,4 | 7,932 | 25,0 | 2681 | 1354 | 1,33810 | |
| FRMX 352 20 DDD R01 B | 352 | 282 | 168 | 44,8 | 4,398 | 13,7 | 1466 | 748 | 1,31670 | |
| FRMX 464 20 DDD R01 B | 464 | 394 | 280 | 59,5 | 5,864 | 18,3 | 1955 | 998 | 1,31670 | |
| FRMX 576 20 DDD R01 B | 576 | 506 | 392 | 74,2 | 7,33 | 22,8 | 2443 | 1247 | 1,31670 | |
| FRMX 688 20 DDD R01 B | 688 | 618 | 504 | 88,9 | 8,796 | 27,4 | 2932 | 1496 | 1,31670 | |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n

TOWEL BAR

Kit includes:

- n° 1 towel bar LEFT
- n° 1 towel bar RIGHT



| COLOUR | Art. Nr. |
|--------|---------------|
| F20 | 5991990310617 |
| R40 | 5991990310618 |
| R27 | 5991990310619 |
| R13 | 5991990310620 |
| R16 | 5991990310621 |
| R05 | 5991990310622 |
| H30 | 5991990310623 |
| T01 | 5991990310678 |
| T11 | 5991990310679 |

TOWEL BAR - HOOK

Kit includes:

- n° 1 towel bar LEFT
- n° 1 Hook



| COLOUR | Art. Nr. |
|--------|---------------|
| F20 | 5991990310624 |
| R40 | 5991990310625 |
| R27 | 5991990310626 |
| R13 | 5991990310627 |
| R16 | 5991990310628 |
| R05 | 5991990310629 |
| H30 | 5991990310630 |
| T01 | 5991990310680 |
| T11 | 5991990310681 |

COLOURS

TOWEL BAR | HOOK



F20
MILKY



RAL 1013 - R40
PEARL WHITE



R27
METAL GREY



RAL 9005 - R13
JET BLACK



RAL 2004 - R16
PURE ORANGE



RAL 1021 - R05
YELLOW RAPE



H30
GREEN APPLE



T01
MATT BLACK



T11
MATT WHITE

Please refer to Cordivari Colours chart, in order to see the real colour.

WOOD SHELVES

Kit includes:

- n° 1 wood shelf L. 286
- n° 1 wood shelf L. 692

Available only for vertical Frame radiator L 464 mm



| WOOD FINISHINGS | Art. Nr. |
|--------------------|---------------|
| OAK MOKA TEXTURED | 5991990500035 |
| OAK WHITE TEXTURED | 5991990500036 |
| WHITENED OAK | 5991990500037 |

WOOD SHELVES

Kit includes:

- n° 1 TOP wood shelf L 800
- n° 1 BOTTOM wood shelf L 800

Available only for horizontal Frame radiator



| WOOD FINISHINGS | Art. Nr. |
|--------------------|---------------|
| OAK MOKA TEXTURED | 5991990500038 |
| OAK WHITE TEXTURED | 5991990500039 |
| WHITENED OAK | 5991990500040 |

WOOD FINISHINGS

SHELVES



OAK MOKA TEXTURED



OAK WHITE TEXTURED



WHITENED OAK

INOX STYLE

EXTRASLIM®

NEO DESIGN



CLASSIC LINE

GRAPHIC PICTURE

ACCESSIONS
TECHNICAL SUPPORT

TOWEL BAR LEFT - L. 274 mm



Materiale: painted mild steel - Available for all vertical Frame radiators

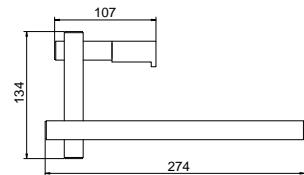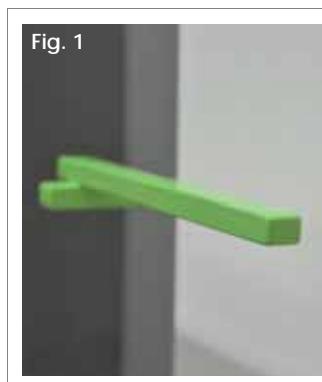

| COLOUR | Art. Nr. |
|--------|---------------|
| F20 | 5991990332214 |
| R40 | 5991990332215 |
| R27 | 5991990332216 |
| R13 | 5991990332217 |
| R16 | 5991990332638 |
| R05 | 5991990332219 |
| H30 | 5991990332190 |
| T01 | 5991990333639 |
| T11 | 5991990333343 |

TOWEL BAR DX - L. 274 mm



Materiale: painted mild steel - Available for all vertical Frame radiators

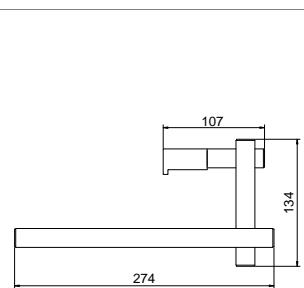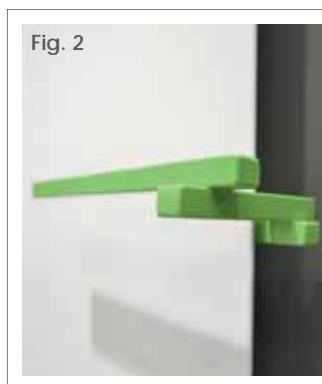

| COLOUR | Art. Nr. |
|--------|---------------|
| F20 | 5991990332220 |
| R40 | 5991990332221 |
| R27 | 5991990332222 |
| R13 | 5991990332223 |
| R16 | 5991990333687 |
| R05 | 5991990332225 |
| H30 | 5991990332191 |
| T01 | 5991990333640 |
| T11 | 5991990333345 |

HOOK - L. 180 X H. 270 mm

Materiale: painted mild steel - Available for all vertical Frame radiators

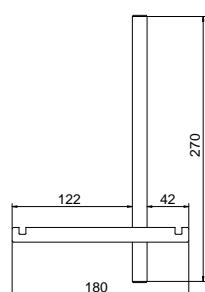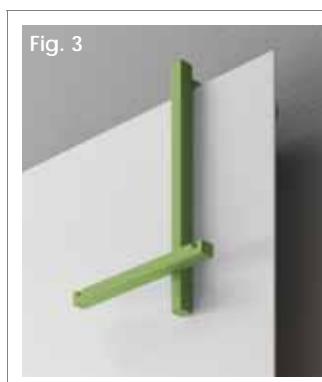


| COLOUR | Art. Nr. |
|--------|---------------|
| F20 | 5991990310601 |
| R40 | 5991990310606 |
| R27 | 5991990310605 |
| R13 | 5991990310603 |
| R16 | 5991990310602 |
| R05 | 5991990310615 |
| H30 | 5991990310604 |
| T01 | 5991990310453 |
| T11 | 5991990310445 |

93-106



HOW TO PLACE
TOWEL BAR

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |



SX - LEFT

DX - RIGHT

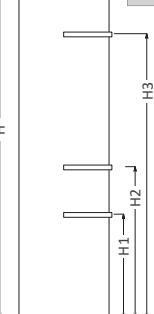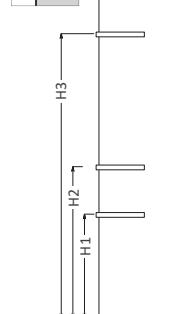

93-106

HOW TO PLACE HOOK



Hook regolabile


NOTICE: Positioning sketches are referred to the different fitting options for each singol product.

WOOD SHELF - L. 286 mm

Available for all vertical Frame radiators



Fig. 4




| WOOD FINISHINGS | Art. Nr. |
|-----------------|---------------|
| | 5991990500014 |
| | 5991990500015 |
| | 5991990500016 |


WOOD SHELF

L. 692 mm Available only for vertical Frame radiator L. 464 mm / L. 807 mm Available only for vertical Frame radiator L. 564 mm



Fig. 5

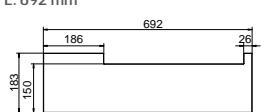

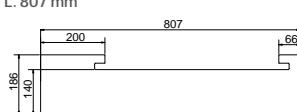


| WOOD FINISHINGS | Art. Nr. L. 692 mm | Art. Nr. L. 807 mm |
|-----------------|-----------------------|-----------------------|
| | 5991990500026 | 5991990500047 |
| | 5991990500027 | 5991990500048 |
| | 5991990500028 | 5991990500049 |

TOP/BOTTOM WOOD SHELF - L. 800 mm

Available for horizontal Frame radiators



Fig. 6

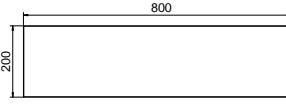



Adjustable shelves

| WOOD FINISHINGS | Art. Nr. TOP SHELF | Art. Nr. BOTTOM SHELF |
|-----------------|-----------------------|--------------------------|
| | 5991990500029 | 5991990500032 |
| | 5991990500030 | 5991990500033 |
| | 5991990500031 | 5991990500034 |


HOW TO PLACE SHELF L. 286 mm

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

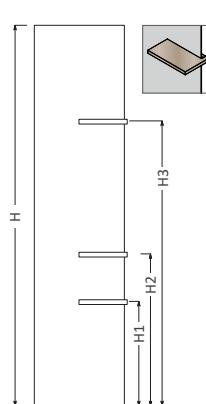

HOW TO PLACE SHELF L. 692 mm - L. 807

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1022 | 300 | 500 | 800 |
| 1222 | 400 | 600 | 1000 |
| 1422 | 400 | 700 | 1200 |
| 1622 | 500 | 800 | 1300 |
| 1822 | 500 | 800 | 1400 |
| 2022 | 500 | 800 | 1500 |

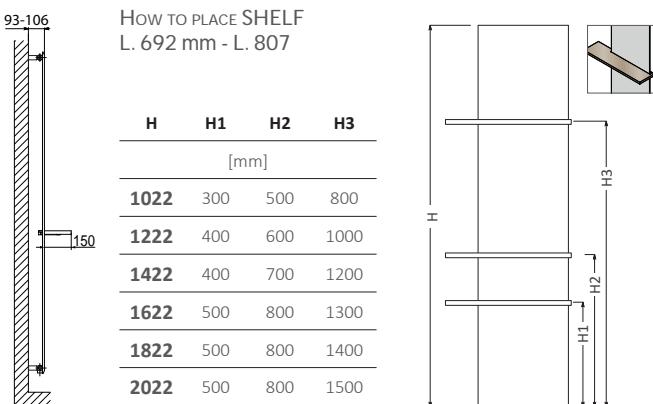

Notice: Positioning sketches are referred to the different fitting options for each single product.



FRAME INOX ELECTRIC



EUROPEAN WARRANTY

MATERIAL:

Horizontal collector in painted carbon steel with ϕ of 30 mm
Heating elements in painted carbon steel
Heating plate in polished stainless steel
Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



Electrical resistors: CLASS 1


Minimum class protection: IP 44

Seasonal energy efficiency η_s : $\geq 38\%$

Wire Length: 1200 mm with Schuko plug

Electrical only: with digital thermostat and remote control

HOW TO PLACE ELECTRIC RADIATORS

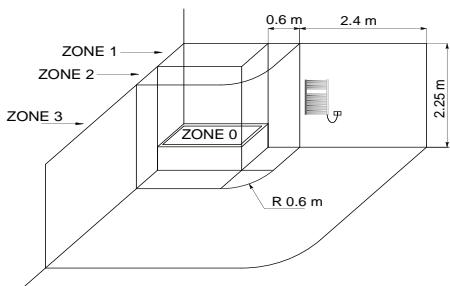

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

INCLUDED



Remote control for top digital thermostat

MAIN FEATURES AND FUNCTIONS:
CRONO: function of chrono-thermostat with daily or weekly programming with two temperature levels (Comfort/Eco)
COMFORT: Possibility of setting your own desired temperature for time slot for higher comfort
ECO: Possibility of keeping the temperature constant with lower power consumption. Useful for energy saving when the room is not occupied.
ANTI-FREEZE: Useful if the room is not used for long periods
TIMER/FORCED MARCH: Useful to heat rapidly the room and dry towels thanks to 2h of forced march at max. Power.
CHILD SAFETY LOCK: special purpose lock of the display panel so to avoid any accidental alteration
REMOTE CONTROL: The digital thermostat is equipped with an infrared remote control, useful to manage all the aforementioned functions.

ACCESSORIES










**TOWEL BAR
POLISHED FOR MODELS
FRAME ELECTRIC - FRAME
BLOWER**

L. 502 (L= 560 mm)
Art. Nr. 5991990300191

L. 552 (L= 610 mm)
Art. Nr. 5991990300192

Accessories and spare parts - see from page 366.

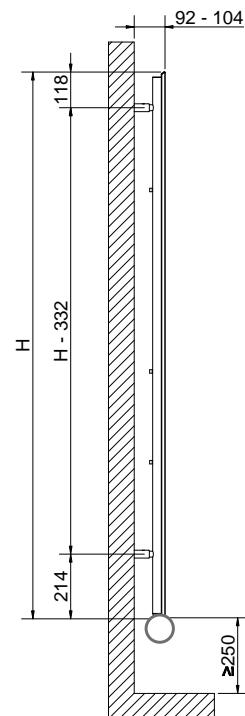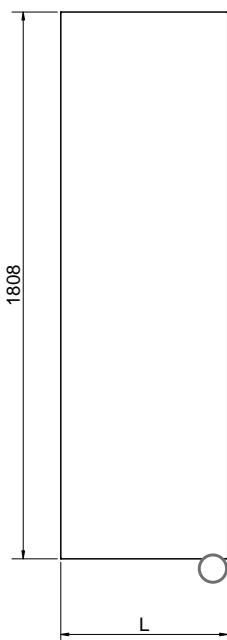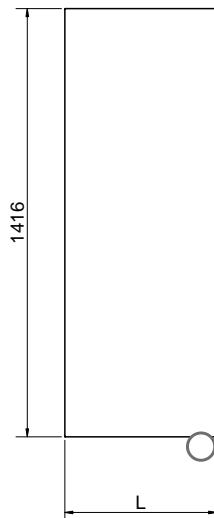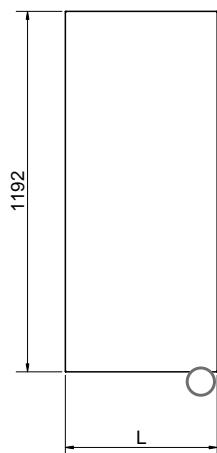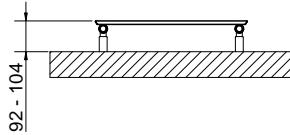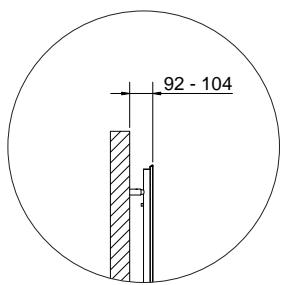


TOP DIGITAL THERMOSTAT

The general footprint has to be calculated considering the thermostat height.

POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1192 | 430 | 630 | 1030 |
| 1416 | 430 | 730 | 1230 |
| 1808 | 530 | 830 | 1230 |

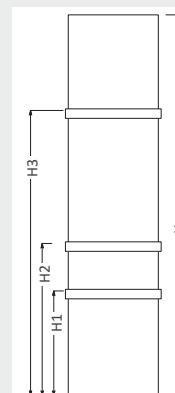

FRAME INOX ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|--------------------------|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | [Kg] |
| KIT - Digital thermostat | | | | |
| 3605550400001 | 1192 | 502 | 700 | 23 |
| 3605550400002 | 1416 | 502 | 900 | 26 |
| 3605550400003 | 1416 | 552 | 1000 | 29 |
| 3605550400004 | 1808 | 552 | 1200 | 37 |



FRAME ELECTRIC



MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
 Heating elements in painted carbon steel
 Heating plate in painted carbon steel
 Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
 The kit is certified by TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
 Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

COLOURS:

Radiators and accessories: standard white R01 colour.
 For other colours see page 388.

EUROPEAN WARRANTY

PRODUCT CERTIFICATES



Electrical resistors: CLASS 1


Minimum class protection: IP 44

Seasonal energy efficiency η_s : ≥38%

Wire Length: 1200 mm with Schuko plug

Electrical only: with digital thermostat and remote control

HOW TO PLACE ELECTRIC RADIATORS

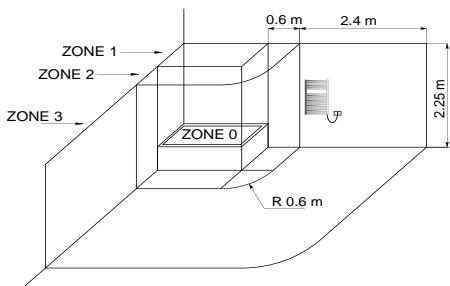

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

INCLUDED



Remote control for top digital thermostat

MAIN FEATURES AND FUNCTIONS:

CRONO: function of chrono-thermostat with daily or weekly programming with two temperature levels (Comfort/Eco)
 COMFORT: Possibility of setting your own desired temperature for time slot for higher comfort
 ECO: Possibility of keeping the temperature constant with lower power consumption. Useful for energy saving when the room is not occupied.
 ANTI-FREEZE: Useful if the room is not used for long periods.
 TIMER/FORCED MARCH: Useful to heat rapidly the room and dry towels thanks to 2h of forced march at max. Power.
 CHILD SAFETY LOCK: special purpose lock of the display panel so to avoid any accidental alteration
 REMOTE CONTROL: The digital thermostat is equipped with an infrared remote control, useful to manage all the aforementioned functions.

ACCESSORIES





TOWEL BAR PAINTED
 FOR MODELS FRAME
 ELECTRIC - FRAME
 BLOWER

L. 502 (L= 560 mm)
 Art. Nr. 5991990310664


L. 552 (L= 610 mm)
 Art. Nr. 5991990310665

Accessories and spare parts - see from page 366.

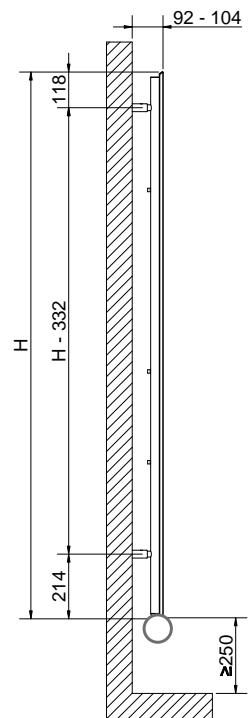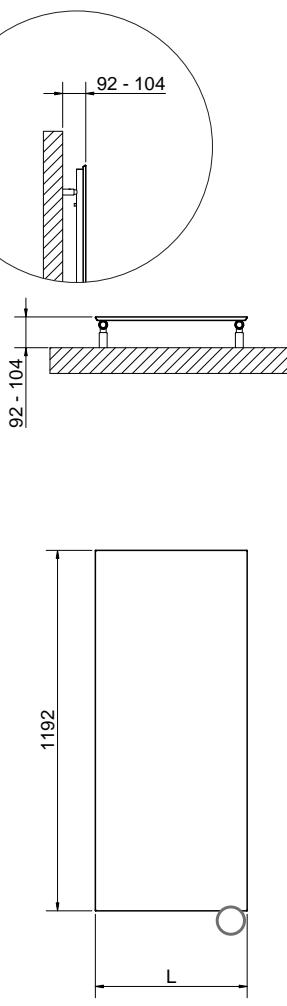


POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1192 | 430 | 630 | 1030 |
| 1416 | 430 | 730 | 1230 |
| 1808 | 530 | 830 | 1230 |

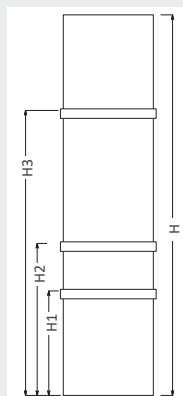

TOP DIGITAL THERMOSTAT



The general footprint has to be calculated considering the thermostat height.

FRAME ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|--------------------------|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | [Kg] |
| KIT - DIGITAL THERMOSTAT | | | | |
| 3605556100001 | 1192 | 502 | 700 | 23 |
| 3605556100002 | 1416 | 502 | 900 | 26 |
| 3605556100003 | 1416 | 552 | 1000 | 29 |
| 3605556100004 | 1808 | 552 | 1200 | 37 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.



FRAME INOX BLOWER



EUROPEAN WARRANTY

MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in polished stainless steel
Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

ELECTRIC MODULE FOR VENTILATED FUNCTION:

Power 1000 Watt - 230 V 50 Hz | ON/OFF Switch | Setting the temperature:
+10°C to +30°C.

PRODUCT CERTIFICATES



PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

Electrical resistors: CLASS 2

Minimum class protection: IP 24

Seasonal energy efficiency η_s : ≥38%

Wire Length: 800 mm with Schuko plug

Available electric resistances: with BLOWER electric module for the ventilated function



ELECTRIC MODULE FOR VENTILATED FUNCTION:

- Ultra-discrete: The controller on the back of the radiator is aesthetically invisible
- Excellent ergonomic settings
- "Intelligent" electronic control: stable and accurate temperature throughout the year
- Energy saving package
- Super comfort mode (automatic boost): instantaneous heating, the hot air blower allows an automatic and rapid increase of the ambient temperature, following ECO, Antifreeze or Standby periods
- Reduced thickness behind the radiator
- Active memory: time and settings are saved by the EEPROM if the main electricity supply is interrupted.

The "Blower" electric fan module is supplied in grey color.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

ACCESSORIES

Wireless remote control




Remote control of "BLOWER" ventilated functioning

Art. Nr. 5150990000011

TOWEL BAR







POLISHED FOR MODELS
FRAME ELECTRIC - FRAME
BLOWER




L. 502 (L= 560 mm)
Art. Nr. 5991990300191

L. 552 (L= 610 mm)
Art. Nr. 5991990300192

Accessories and spare parts- see from page 366.

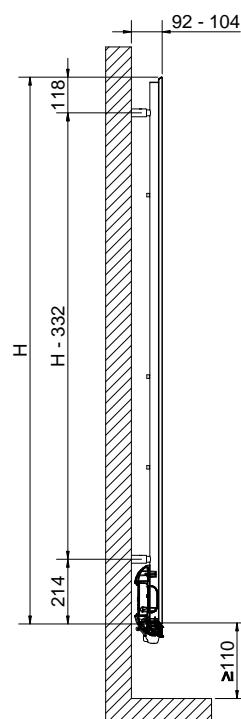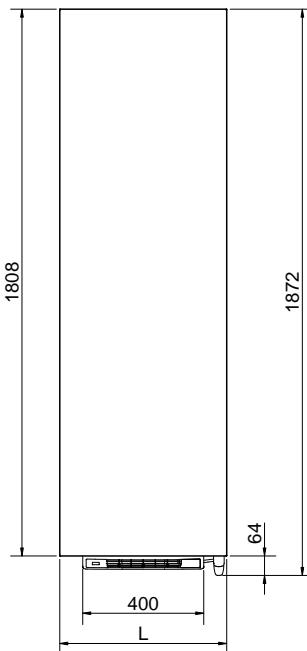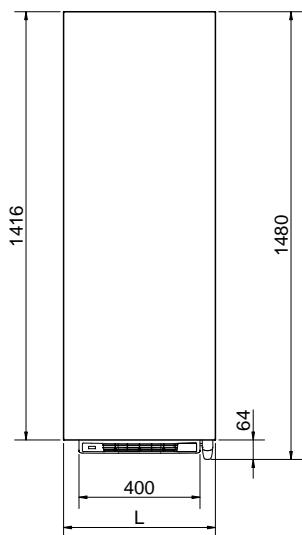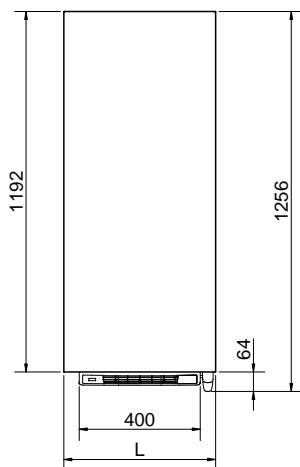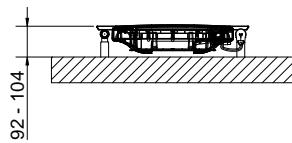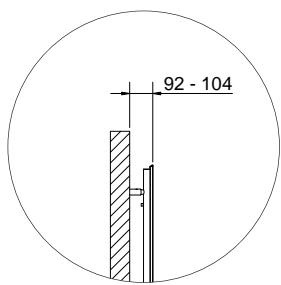


HOW TO PLACE ELECTRIC RADIATORS

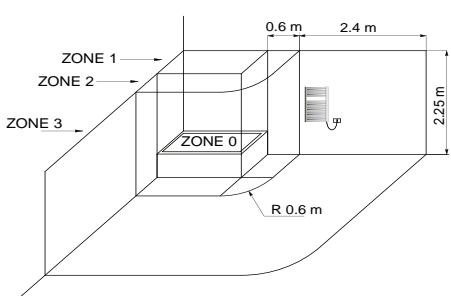

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.

POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1192 | 430 | 630 | 1030 |
| 1416 | 430 | 730 | 1230 |
| 1808 | 530 | 830 | 1230 |

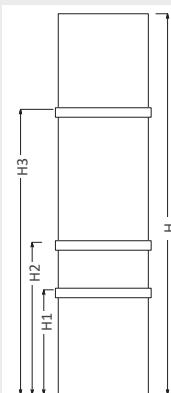

FRAME INOX BLOWER

| Art. Nr. | Height | Width | Output | BLOWER Output | Weight |
|---------------|-------------|--------|--------|---------------|--------|
| | H [mm] | L [mm] | Watt | Watt | [Kg] |
| 3605550401001 | 1192 | 502 | 750 | 1000 | 27 |
| 3605550401002 | 1416 | 502 | 900 | 1000 | 31 |
| 3605550401003 | 1416 | 552 | 1000 | 1000 | 33 |
| 3605550401004 | 1808 | 552 | 1200 | 1000 | 41 |



FRAME BLOWER



MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
 Heating elements in painted carbon steel
 Heating plate in painted carbon steel
 Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
 The kit is certified from TÜV in compliance with VDI 6036-class 4.

ELECTRIC MODULE FOR VENTILATED FUNCTION:

Power 1000 Watt - 230 V 50 Hz | ON/OFF Switch | Setting the temperature:
 +10°C to +30°C.

PRODUCT CERTIFICATES



PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
 Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

COLOURS:

Radiators and accessories: standard white R01 colour.
 For other colours see page 388.

Electrical resistors: CLASS 2

Minimum class protection: IP 24

Seasonal energy efficiency η_s : ≥38%

Wire Length: 800 mm with Schuko plug

Available electric resistances: with BLOWER electric module for the ventilated function



ELECTRIC MODULE FOR VENTILATED FUNCTION:

- Ultra-discrete: The controller on the back of the radiator is aesthetically invisible
- Excellent ergonomic settings
- "Intelligent" electronic control: stable and accurate temperature throughout the year
- Energy saving package
- Super comfort mode (automatic boost): instantaneous heating, the hot air blower allows an automatic and rapid increase of the ambient temperature, following ECO, Antifreeze or Standby periods
- Reduced thickness behind the radiator
- Active memory: time and settings are saved by the EEPROM if the main electricity supply is interrupted.

For radiators realized in a color other than the standard white, The "Blower" electric fan module is supplied in grey color.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

ACCESSORIES



Wireless remote control

Remote control of "BLOWER" ventilated functioning

Art. Nr. 5150990000011









TOWEL BAR PAINTED
FOR MODELS FRAME
ELECTRIC - FRAME
BLOWER


L. 502 (L= 560 mm)
Art. Nr. 5991990310664

L. 552 (L= 610 mm)
Art. Nr. 5991990310665

Accessories and spare parts- see from page 366.

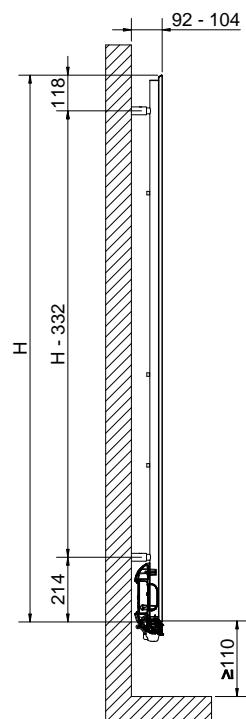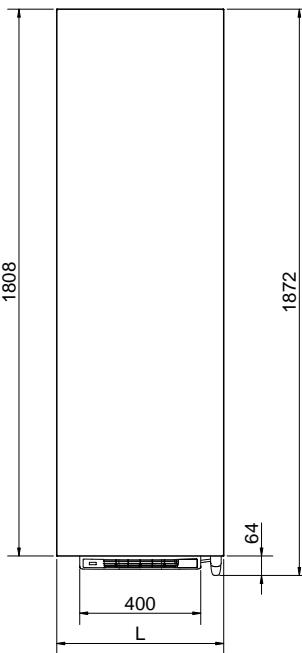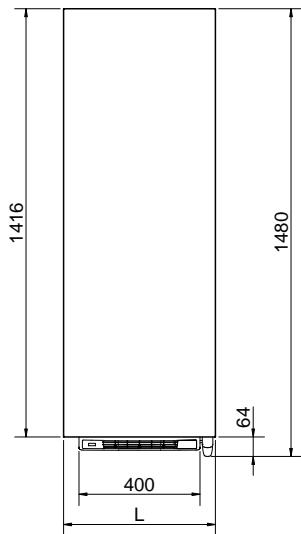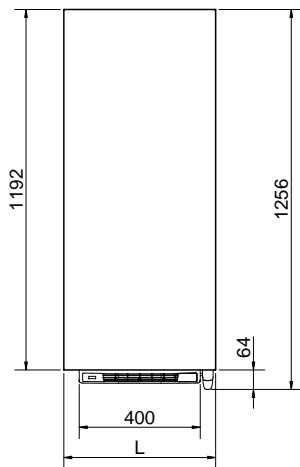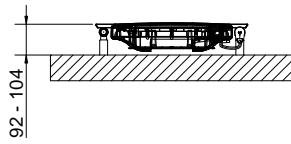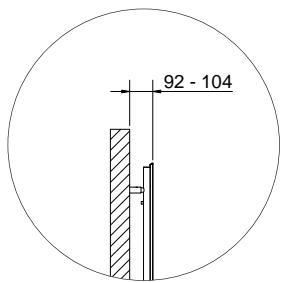

HOW TO PLACE ELECTRIC RADIATORS

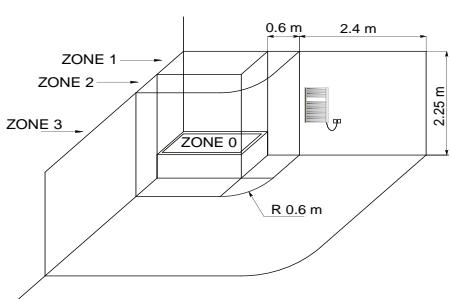


The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.

POSITIONING OF
TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1192 | 430 | 630 | 1030 |
| 1416 | 430 | 730 | 1230 |
| 1808 | 530 | 830 | 1230 |

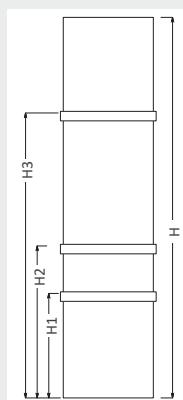

FRAME BLOWER

| Art. Nr. | Height | Width | Output | BLOWER Output | Weight |
|----------------------|-------------|--------|--------|---------------|--------|
| | H [mm] | L [mm] | Watt | Watt | [Kg] |
| 3605556101001 | 1192 | 502 | 750 | 1000 | 27 |
| 3605556101002 | 1416 | 502 | 900 | 1000 | 31 |
| 3605556101003 | 1416 | 552 | 1000 | 1000 | 33 |
| 3605556101004 | 1808 | 552 | 1200 | 1000 | 41 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.



FRAME INOX BLOWER DUAL ENERGY



MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in polished stainless steel
Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

EUROPEAN WARRANTY

ELECTRIC MODULE FOR VENTILATED FUNCTION:

Power 1000 Watt - 230 V 50 Hz | ON/OFF Switch | Setting the temperature: +10°C to +30°C.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

Heating plate is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.

PRODUCT CERTIFICATES



P. Max: 5 bar

T. Max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

Electrical resistors: CLASS 2

Minimum class protection: IP 24

Seasonal energy efficiency η_s : ≥38%

Wire Length: 800 mm with Schuko plug

Available electric resistances: with BLOWER electric module for the ventilated function



MIXED OPERATION FRAME BLOWER

An essential geometric shape that satisfies the tastes of the most contemporary design, is supported by the performances of a very powerful bathroom radiator and a fan heater integrated into the radiator but totally independent from its main function. In fact, a Blower module is integrated into the traditional Frame radiator, which allows to quickly heat even medium / large rooms, for maximum comfort, even when the main heating system is off. This possibility of use is ideal in mid-seasons or whenever extra comfort is desired for the bathroom.

The "Blower" electric fan module is supplied in grey color.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.







The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.


ACCESSORIES

| | | |
|--|---|---|
|  <p>Wireless remote control Art. Nr. 5150990000011</p> |  <p>Elegant square manual polished valve kit Copper connection Ø 12/14/15 Art. Nr. 5991990301084 Multilayer connection Ø 16 x2 Art. Nr. 5991990301083</p> |  <p>Elegant square valve with polished thermostatic head Copper connection Ø 12/14/15 Art. Nr. 5991990301072 Multilayer connection Ø 16 x2 Art. Nr. 5991990301071</p> |
|--|---|---|

Accessories and spare parts- see from page 366.

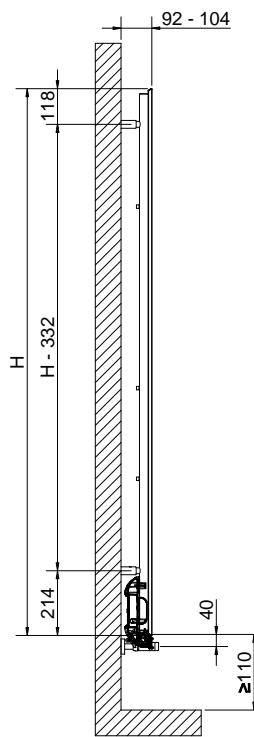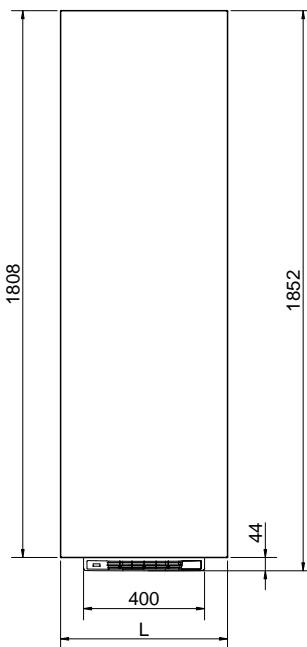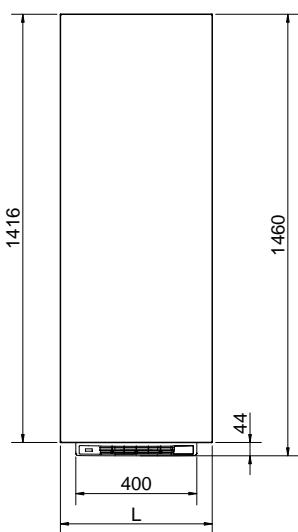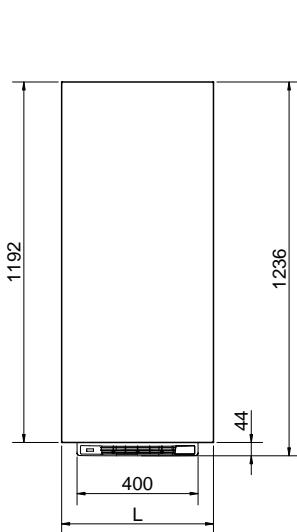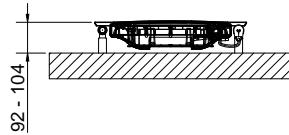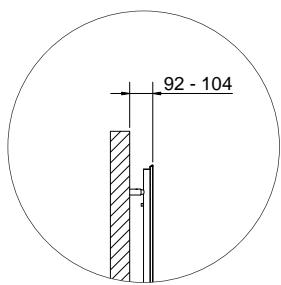

HOW TO PLACE ELECTRIC RADIATORS

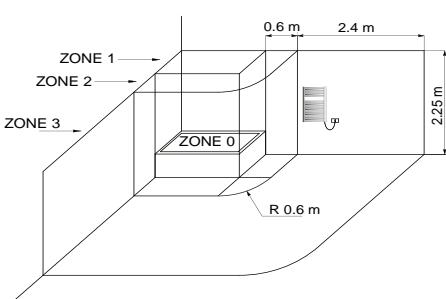


The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.

POSITIONING OF TOWEL BAR (ACCESSORIES)

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1192 | 430 | 630 | 1030 |
| 1416 | 430 | 730 | 1230 |
| 1808 | 530 | 830 | 1230 |

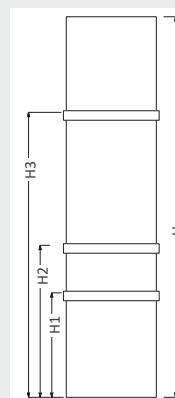

FRAME INOX BLOWER DUAL ENERGY

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n | Output BLOWER Watt |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|--------------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | | |
| 3605550401015 | 1192 | 502 | 450 | 22,1 | 1,4 | 5 | 615 | 326 | 1,2422 | 1000 |
| 3605550401016 | 1416 | 502 | 450 | 29,4 | 1,6 | 6 | 723 | 383 | 1,2433 | 1000 |
| 3605550401017 | 1416 | 552 | 500 | 31,2 | 1,8 | 6,5 | 799 | 423 | 1,2433 | 1000 |
| 3605550401018 | 1808 | 552 | 500 | 38,7 | 2,3 | 7,7 | 1007 | 533 | 1,2452 | 1000 |

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



FRAME BLOWER DUAL ENERGY



MATERIAL:

Horizontal collector in painted carbon steel with Ø of 30 mm
Heating elements in painted carbon steel
Heating plate in painted carbon steel
Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

ELECTRIC MODULE FOR VENTILATED FUNCTION:

Power 1000 Watt - 230 V 50 Hz | ON/OFF Switch | Setting the temperature:
+10°C to +30°C.

PRODUCT CERTIFICATES



PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

P. Max: 5 bar

T. Max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

Electrical resistors: CLASS 2

Minimum class protection: IP 24

Seasonal energy efficiency η_s : ≥38%

Wire Length: 800 mm with Schuko plug

Available electric resistances: with BLOWER electric module for the ventilated function



MIXED OPERATION FRAME BLOWER

An essential geometric shape that satisfies the tastes of the most contemporary design, is supported by the performances of a very powerful bathroom radiator and a fan heater integrated into the radiator but totally independent from its main function. In fact, a Blower module is integrated into the traditional Frame radiator, which allows to quickly heat even medium / large rooms, for maximum comfort, even when the main heating system is off. This possibility of use is ideal in mid-seasons or whenever extra comfort is desired for the bathroom.

For radiators realized in a color other than the standard white, The "Blower" electric fan module is supplied in grey color.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.







The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.


ACCESSORIES

| | | |
|---|---|--|
| Wireless remote control Art. Nr. 5150990000011 | Elegant square manual valve kit painted pure white R01 Copper connection Ø 12/14/15 Art. Nr. 5991990310553 Multilayer connection Ø 16 x2 Art. Nr. 5991990310552 | Elegant square with thermostatic head valve kit, painted pure white R01 Copper connection Ø 12/14/15 Art. Nr. 5991990310539 Multilayer connection Ø 16 x2 Art. Nr. 5991990310538 |
|---|---|--|


Accessories and spare parts- see from page 366.

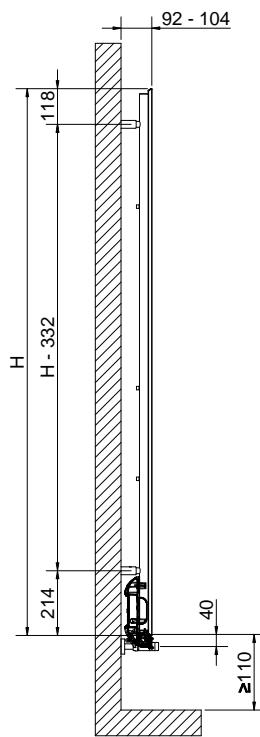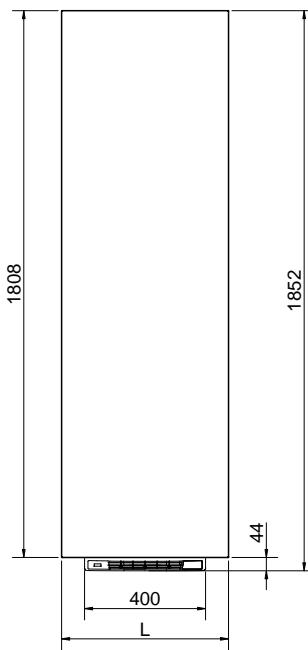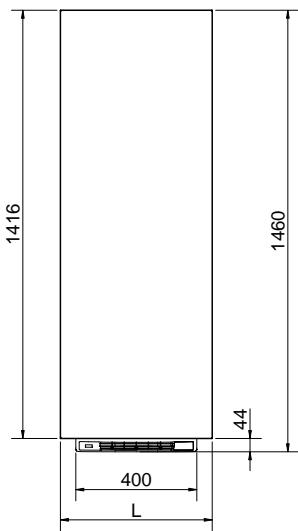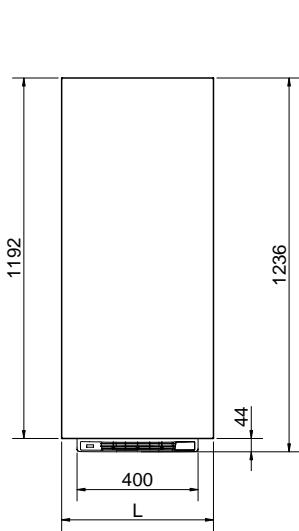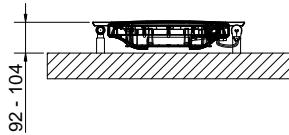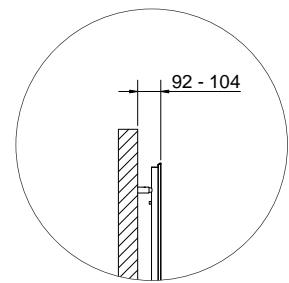

POSITIONING OF TOWEL BAR (ACCESSORIES)

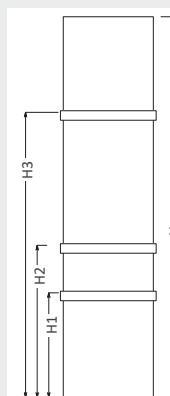

HOW TO PLACE ELECTRIC RADIATORS

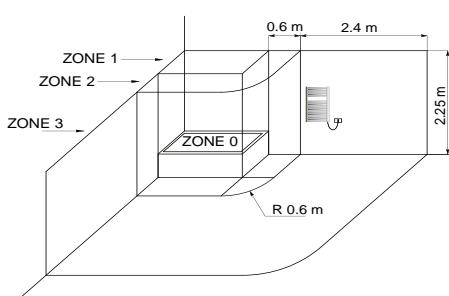

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.

| H | H1 | H2 | H3 |
|-------------|-----|-----|------|
| [mm] | | | |
| 1192 | 430 | 630 | 1030 |
| 1416 | 430 | 730 | 1230 |
| 1808 | 530 | 830 | 1230 |

FRAME BLOWER DUAL ENERGY

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n | Output BLOWER Watt |
|---------------|-------------|--------|--------------|------------|---------|---------------|-------------------------------|-------------------------------|------------|--------------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | $\Delta t = 50^\circ\text{C}$ | $\Delta t = 30^\circ\text{C}$ | | |
| 3605556101015 | 1192 | 502 | 450 | 22,1 | 1,4 | 5 | 615 | 326 | 1,2422 | 1000 |
| 3605556101016 | 1416 | 502 | 450 | 29,4 | 1,6 | 6 | 723 | 383 | 1,2433 | 1000 |
| 3605556101017 | 1416 | 552 | 500 | 31,2 | 1,8 | 6,5 | 799 | 423 | 1,2433 | 1000 |
| 3605556101018 | 1808 | 552 | 500 | 38,7 | 2,3 | 7,7 | 1007 | 533 | 1,2452 | 1000 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^\circ\text{C} \times (\text{desired } \Delta t / 50)^\text{n}$



ANDREA

PATENTED



5 YEARS
WARRANTY

MATERIAL:

Vertical collector in painted carbon steel 90x30 mm.
Horizontal heating elements in painted carbon steel 50x20 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PRODUCT CERTIFICATES



AWARD



ACCESSORIES



Elegant square manual valve kit painted pure white R01
Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01
Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Pipe covering kit for Pipe Centres 50 mm - valves polished
Art. Nr. 5103000000057



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01
Copper connection Ø 12/14/15
Art. Nr. 5991990311243









Multilayer connection Ø 16 x2
Art. Nr. 5991990311242



Tinta valve pipe centres 50 mm with thermostatic head left - with pipe covering kit - pure white R01
Copper connection Ø 12/14/15
Art. Nr. 5991990311245

Multilayer connection Ø 16 x2
Art. Nr. 5991990311244

Accessories and spare parts- see from page 366.

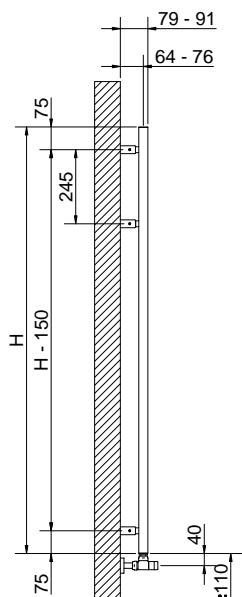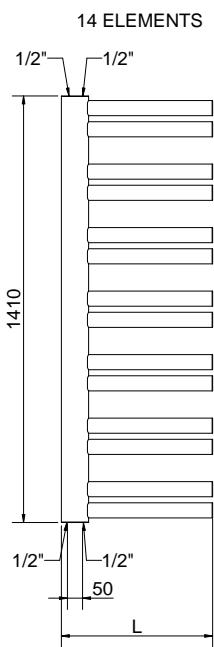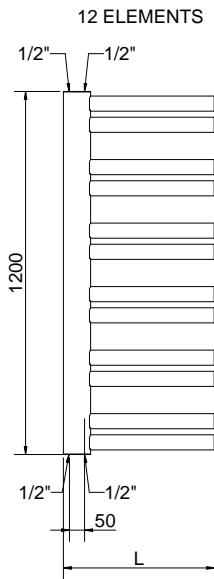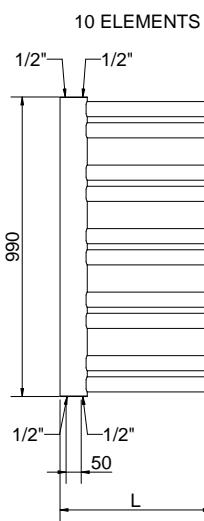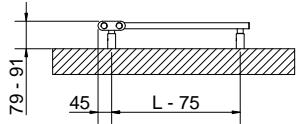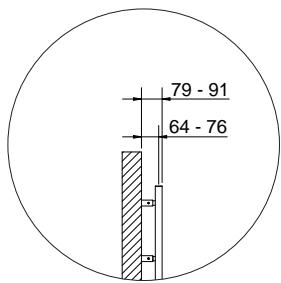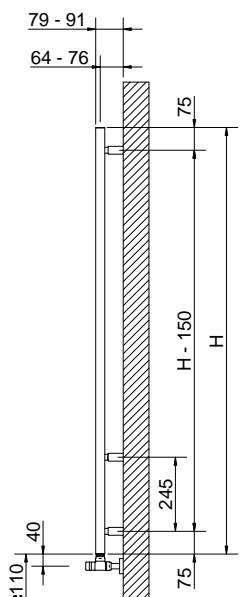SIDE VIEW
RIGHT VERSIONSIDE VIEW
LEFT VERSION

ANDREA

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | |
| 3551776100001 | 990 | 500 | 50 | 10,2 | 0,8 | 5,5 | 390 | 209 |
| 3551776100002 | 1200 | 500 | 50 | 12,2 | 0,9 | 6,7 | 439 | 239 |
| 3551776100003 | 1410 | 500 | 50 | 14,3 | 1,0 | 7,8 | 489 | 269 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



ANDREA ELECTRIC



PATENTED

MATERIAL:

Vertical collector in painted carbon steel 90x30 mm
Horizontal heating elements in painted carbon steel 50x20 mm
Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.


PRODUCT CERTIFICATES



AWARD



HOW TO PLACE ELECTRIC RADIATORS

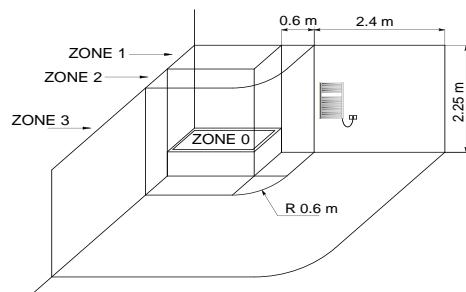

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.



INCLUDED




Remote control for top digital thermostat

MAIN FEATURES AND FUNCTIONS:


CRONO: function of chrono-thermostat with daily or weekly programming with two temperature levels (Comfort/Eco)
COMFORT: Possibility of setting your own desired temperature for time slot for higher comfort
ECO: Possibility of keeping the temperature constant with lower power consumption. Useful for energy saving when the room is not occupied.
ANTI-FREEZE: Useful if the room is not used for long periods
TIMER/FORCED MARCH: Useful to heat rapidly the room and dry towels thanks to 2h of forced march at max. Power.
CHILD SAFETY LOCK: special purpose lock of the display panel so to avoid any accidental alteration
REMOTE CONTROL: The digital thermostat is equipped with an infrared remote control, useful to manage all the aforementioned functions.

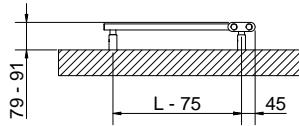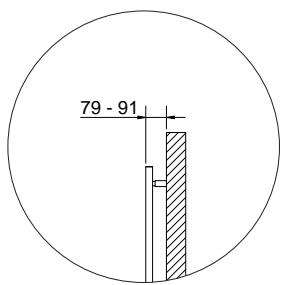




10 ELEMENTS

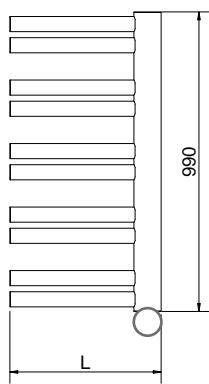

12 ELEMENTS

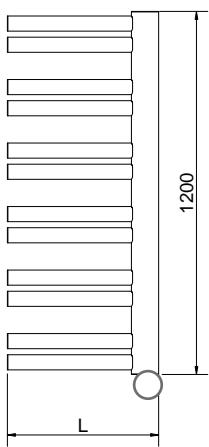

14 ELEMENTS

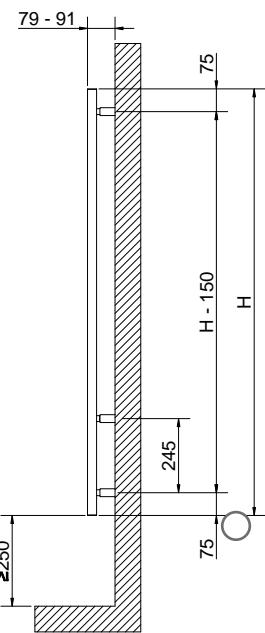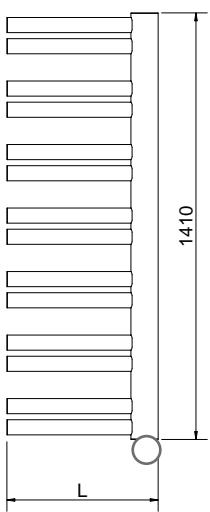

TOP DIGITAL THERMOSTAT

The general footprint has to be calculated considering the thermostat height.

ANDREA ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|-------------------------|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | [Kg] |
| KIT- Digital thermostat | | | | |
| 3581776100001 | 990 | 500 | 500 | 17 |
| 3581776100002 | 1200 | 500 | 600 | 20 |
| 3581776100003 | 1410 | 500 | 700 | 23 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.



JACKY

PATENTED



page 152

**5 YEARS
WARRANTY**

MATERIAL:

Vertical collector in painted carbon steel 90x30 mm.
Horizontal heating elements in painted carbon steel 50x20 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PRODUCT CERTIFICATES



PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.


P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242





Tinta valve pipe centres 50 mm with thermostatic head left - with pipe covering kit - pure white R01


Copper connection Ø 12/14/15
Art. Nr. 5991990311245

Multilayer connection Ø 16 x2
Art. Nr. 5991990311244


Accessories and spare parts- see from page 366.

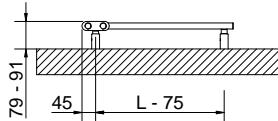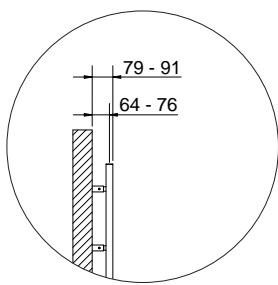





15 ELEMENTS

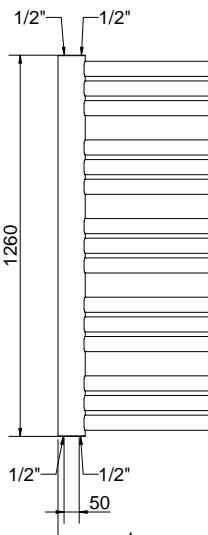

18 ELEMENTS

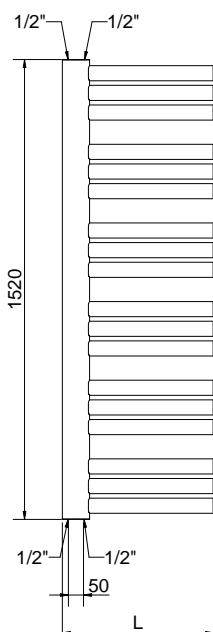

21 ELEMENTS

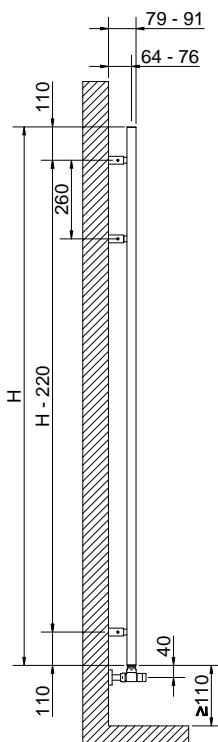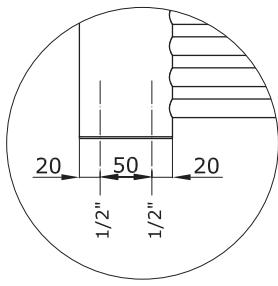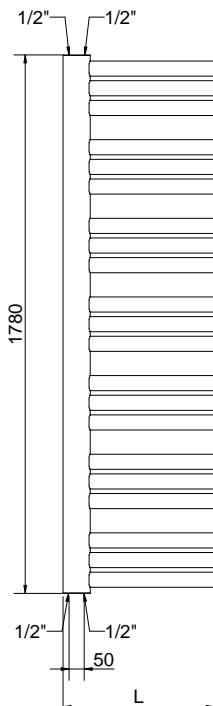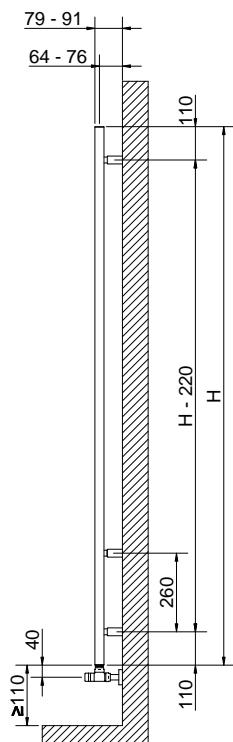SIDE VIEW
RIGHT VERSIONSIDE VIEW
LEFT VERSION

JACKY

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551776101001 | 1260 | 500 | 50 | 14,4 | 1,1 | 7,8 | 566 | 306 | 1,2030 |
| 3551776101002 | 1520 | 500 | 50 | 17,3 | 1,3 | 9,4 | 654 | 352 | 1,2133 |
| 3551776101003 | 1780 | 500 | 50 | 20,2 | 1,5 | 11,0 | 741 | 397 | 1,2233 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



PATENTED

EUROPEAN
WARRANTY

MATERIAL:

Vertical collector in painted carbon steel 90x30 mm
Horizontal heating elements in painted carbon steel 50x20 mm
Glycolate water

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

PRODUCT CERTIFICATES



Electrical resistors: CLASS 1


Minimum class protection: IP 44

Seasonal energy efficiency η_s : $\geq 38\%$

Wire Length: 1200 mm with Schuko plug

Electrical only: with digital thermostat and remote control

HOW TO PLACE ELECTRIC RADIATORS

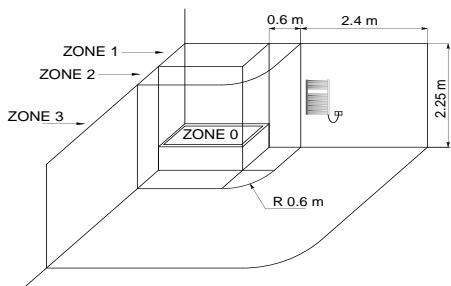

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%.

The seasonal energy efficiency of ambient heating (η_s) is expressed with the ratio between the demand of ambient heating supplied by a heating appliance and the annual energy consumption required to meet this demand, expressed as percentage. The Cordivari ErP is in line with the new Ecodesign directives, which are characterized by a great efficiency combined with the maximum attention to energy saving. In particular the radiators are at least equipped with: electronic temperature control; open window sensor; weekly program timer.

Thanks to the new fully programmable digital thermostats and sensors present on the radiators, now the new Cordivari ErP electric radiators, heat, efficiency and energy saving are the best allies of your comfort.

INCLUDED



Remote control for top digital thermostat

MAIN FEATURES AND FUNCTIONS:

CRONO: function of chrono-thermostat with daily or weekly programming with two temperature levels (Comfort/Eco)

COMFORT: Possibility of setting your own desired temperature for time slot for higher comfort



ECO: Possibility of keeping the temperature constant with lower power consumption. Useful for energy saving when the room is not occupied.

ANTI-FREEZE: Useful if the room is not used for long periods


TIMER/FORCED MARCH: Useful to heat rapidly the room and dry towels thanks to 2h of forced march at max. Power.

CHILD SAFETY LOCK: special purpose lock of the display panel so to avoid any accidental alteration


REMOTE CONTROL: The digital thermostat is equipped with an infrared remote control, useful to manage all the aforementioned functions.

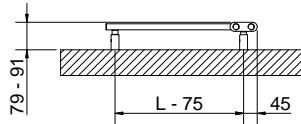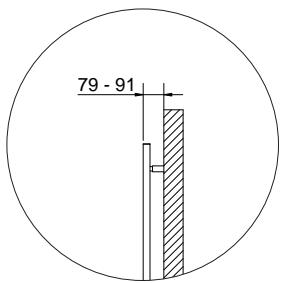




12 ELEMENTS

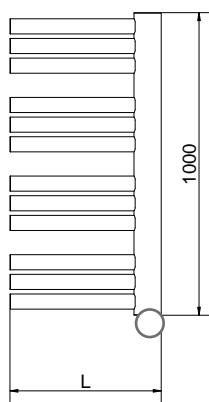

15 ELEMENTS

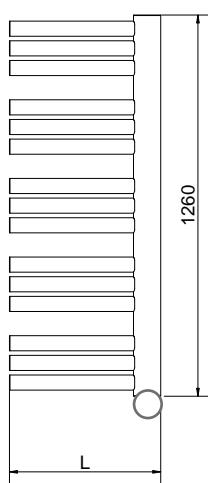

21 ELEMENTS

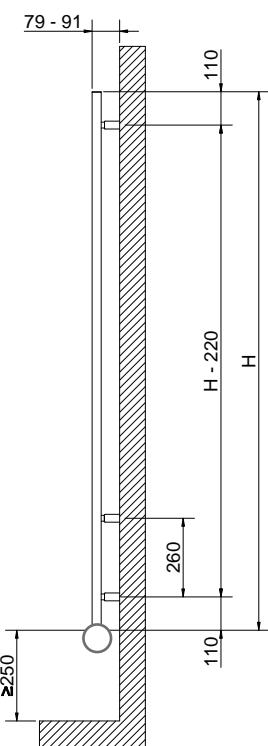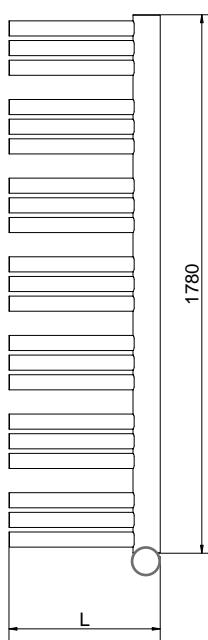

TOP DIGITAL THERMOSTAT

The general footprint has to be calculated considering the thermostat height.

JACKY ELECTRIC

| Art. Nr. | Height | Width | Thermal output | Weight |
|--------------------------|-------------|--------|----------------|--------|
| | H [mm] | L [mm] | Watt | [Kg] |
| KIT - Digital thermostat | | | | |
| 3581776100021 | 990 | 500 | 500 | 16 |
| 3581776100022 | 1260 | 500 | 600 | 23 |
| 3581776100023 | 1780 | 500 | 900 | 32 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.



YARA



page 156

PATENTED

**5 YEARS
WARRANTY**

MATERIAL:

Vertical collector in painted carbon steel 90x30 mm.
Horizontal heating elements in painted carbon steel Ø 18 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PRODUCT CERTIFICATES



PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.

P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

AWARD



ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242
















Tinta valve pipe centres 50 mm with thermostatic head left - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311245


Multilayer connection Ø 16 x2
Art. Nr. 5991990311244

REVERSIBLE

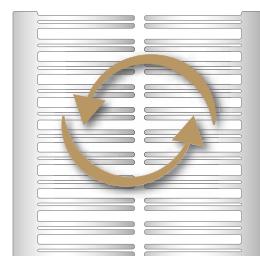


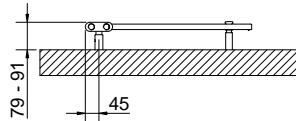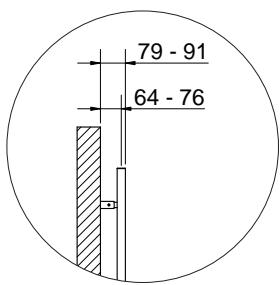





22 ELEMENTS

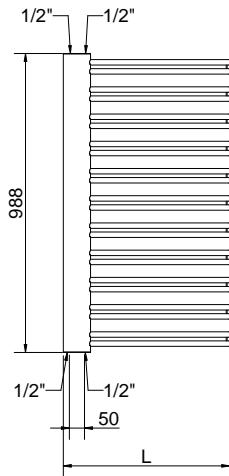

26 ELEMENTS

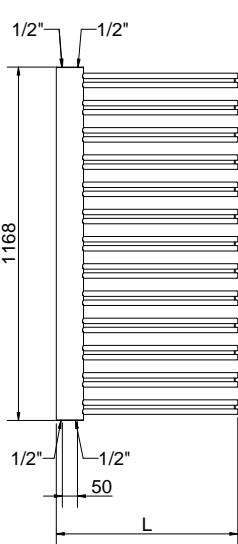

30 ELEMENTS

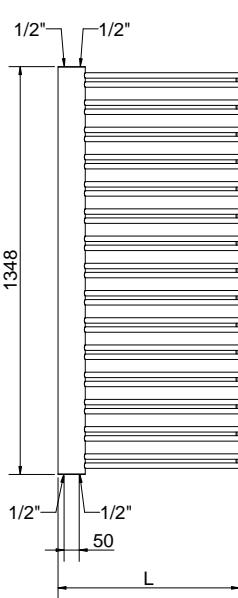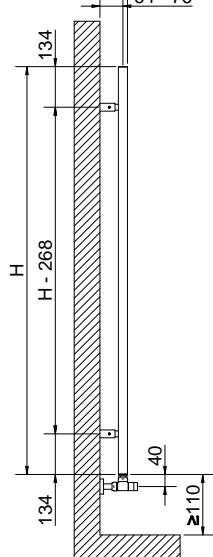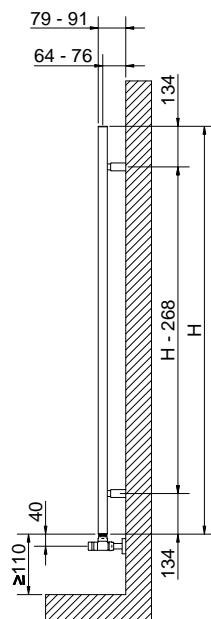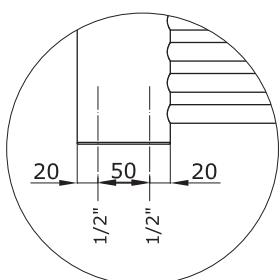79 - 91
64 - 76SIDE VIEW
RIGHT VERSIONSIDE VIEW
LEFT VERSION

YARA

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551436101001 | 988 | 500 | 50 | 16,4 | 0,8 | 3,8 | 465 | 246 | 1,2466 |
| 3551436101002 | 1168 | 500 | 50 | 19,4 | 0,9 | 4,4 | 557 | 292 | 1,2646 |
| 3551436101003 | 1348 | 500 | 50 | 22,4 | 1,0 | 5,1 | 613 | 319 | 1,2786 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



DEBBY

PATENTED



page 158

**5 YEARS
WARRANTY**

MATERIAL:

Vertical oval collector in painted carbon steel 90x30 mm.
Horizontal heating elements in painted carbon steel Ø 18 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PRODUCT CERTIFICATES



PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour.
For other colours see page 388.


P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

REVERSIBLE

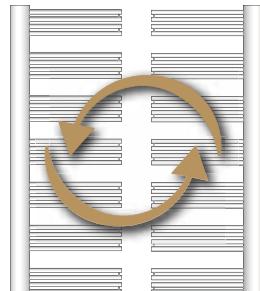

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242











Tinta valve pipe centres 50 mm with thermostatic head left - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311245

Multilayer connection Ø 16 x2
Art. Nr. 5991990311244

Accessories and spare parts- see from page 366.

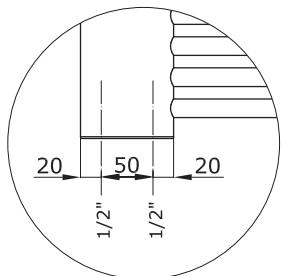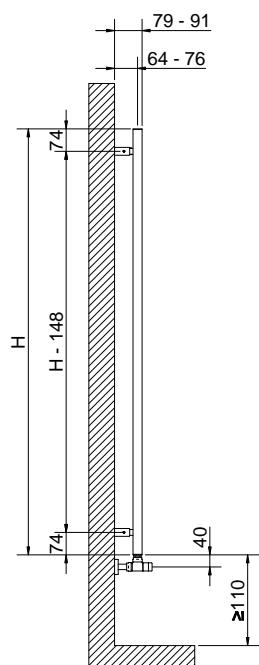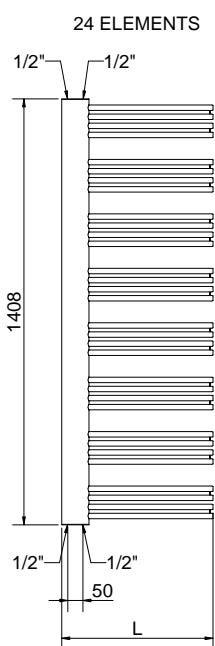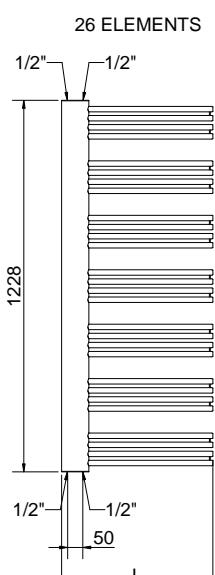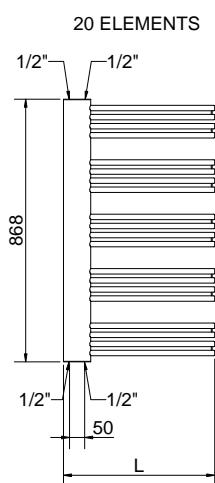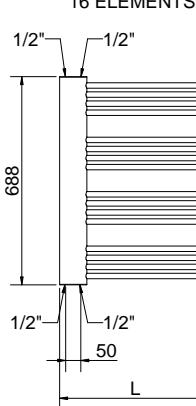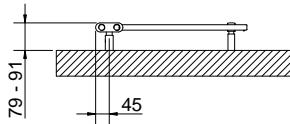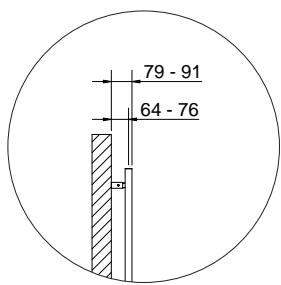

DEBBY

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| 3551436100000 | 688 | 500 | 50 | 8,4 | 0,51 | 2,6 | 312 | 168 | 1,2123 |
| 3551436100001 | 868 | 500 | 50 | 14,8 | 0,7 | 3,4 | 390 | 209 | 1,2224 |
| 3551436100002 | 1228 | 500 | 50 | 20,8 | 0,9 | 4,7 | 504 | 267 | 1,2403 |
| 3551436100003 | 1408 | 500 | 50 | 23,8 | 1 | 5,4 | 548 | 291 | 1,2415 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



GROOVE®

design Mariano Moroni



page 160

PATENTED

**5 YEARS
WARRANTY**

MATERIAL:

Aluminium heating elements 100x20 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour. For other colours see page 388.

PRODUCT CERTIFICATES



P. max: 6 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

HOW TO ORDER THE GROOVE®

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions and profile | Constant value | Article code of the connection | Article code of the colour/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------------------|----------------|--------------------------------|--|----------------|
| AAAA | BBBB | W | DDD | EEE | B |

Example

| Radiator model | Radiator dimensions | Constant value | Article code of the connection | Article code of the finish | Constant value |
|----------------|---------------------|----------------|--------------------------------|----------------------------|----------------|
| GR05 | 1800 | W | V11 | R01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a GROOVE, 5 elements, H 1800 mm, with V11 connection, white R01 colour.

The article code will be:

GR05 1800 W V11 R01 B

ACCESSORIES



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right


Copper connection Ø 12/14/15
Art. Nr. 5991990310543

Multilayer connection Ø 16 x2
Art. Nr. 5991990310542



Pipe covering kit for Pipe Centres 50 mm - valves polished


Art. Nr. 5103000000057



Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01





Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242

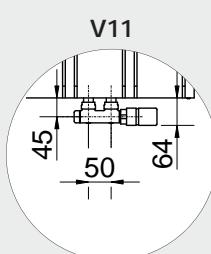

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

Accessories and spare parts- see from page 366.

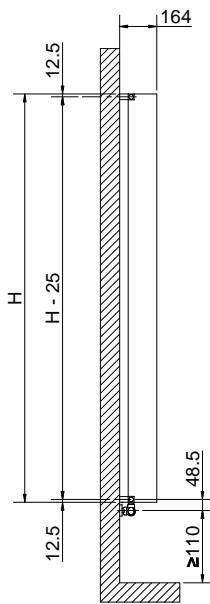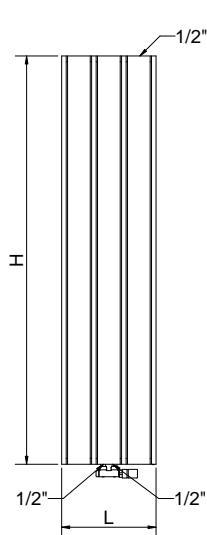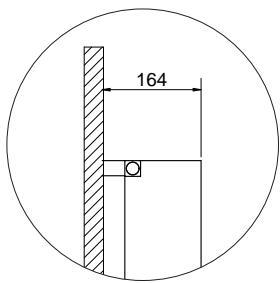

(*) The fixing kit has the same pipe centre (I) as the radiator

| L [mm] | I (*) [mm] |
|------------|------------|
| 284 | 259 |
| 416 | 391 |

Connection



Legend = ► In ▷ Out ◀ Airvent ■ Pipe Centres └ Width □ Connection

GROOVE®

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres I [mm] | Elements | Dry Weight [Kg] | Surface [m²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|------------------|-----------------|------------------------|----------|--------------------|-----------------|-----------------------|---------------------|-----------|------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| GR05 1800 W V11 R01 B | 1800 | 284 | 50 | 5 | 17,3 | 0,67 | 1,8 | 939 | 530 | 1,1199 |
| GR07 1800 W V11 R01 B | | 416 | 50 | 7 | 24,2 | 0,94 | 2,5 | 1315 | 742 | 1,1199 |
| GR05 2000 W V11 R01 B | 2000 | 284 | 50 | 5 | 19,2 | 0,74 | 1,9 | 1043 | 585 | 1,1313 |
| GR07 2000 W V11 R01 B | | 416 | 50 | 7 | 26,9 | 1,04 | 2,7 | 1460 | 819 | 1,1313 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



ROADS®

design Mariano Moroni



page 162

PATENTED

**5 YEARS
WARRANTY**

MATERIAL:

Aluminium heating elements 100x20 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour. For other colours see page 388.

PRODUCT CERTIFICATES



HOW TO ORDER THE ROADS®

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions and profile | Constant value | Article code of the connection | Article code of the colour/ finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------------------|----------------|--------------------------------|--|----------------|
| AAAA | BBBB | W | DDD | EEE | B |

Example

| | | | | | |
|---|--|-----------------------|--|---|-----------------------|
| Radiator model Example: Roads radiator 5 Elements | Radiator dimensions Example: mm 1800 | Constant value | Article code of the connection Example: connection V11 | Article code of the finish Example: White color R01 | Constant value |
| RS05 | 1800 | W | V11 | R01 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a ROADS, 5 elements, H 1800 mm, with V11 connection, white R01 colour.

The article code will be:

RS05 1800 W V11 R01 B

ACCESSORIES



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right
Copper connection Ø 12/14/15
Art. Nr. 5991990310543

Multilayer connection Ø 16 x2
Art. Nr. 5991990310542




Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057







Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01
Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242

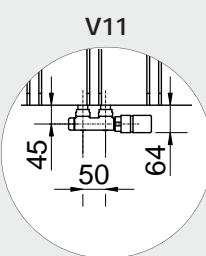

Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

Accessories and spare parts- see from page 366.

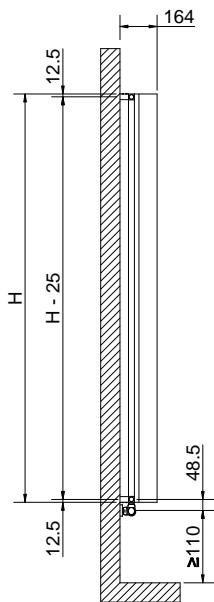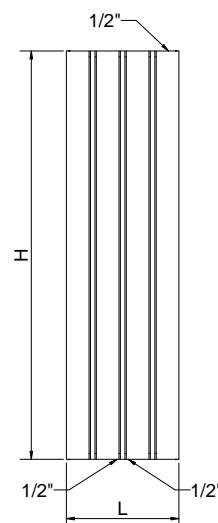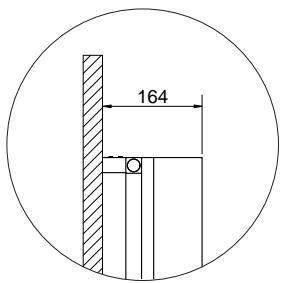

(*) The fixing kit has the same pipe centre (l) as the radiator

| L [mm] | l (*) [mm] |
|------------|------------|
| 364 | 339 |
| 496 | 416 |

Connection



Legend = ► In ▷ Out ⇄ Airvent ■ Pipe Centres L Width □ Connection

ROADS®

| Art. Nr. | Height H [mm] | Width L [mm] | Pipe Centres l [mm] | Elements | Dry Weight [Kg] | Surface [m²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|------------------|-----------------|------------------------|----------|--------------------|-----------------|-----------------------|------------------------|-----------|------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| RS05 1800 W V11 R01 B | 1800 | 364 | 50 | 5 | 17,5 | 0,68 | 1,8 | 939 | 530 | 1,1199 |
| RS07 1800 W V11 R01 B | | 496 | 50 | 7 | 24,4 | 0,96 | 2,5 | 1315 | 742 | 1,1199 |
| RS05 2000 W V11 R01 B | 2000 | 364 | 50 | 5 | 19,3 | 0,75 | 2,0 | 1043 | 585 | 1,1313 |
| RS07 2000 W V11 R01 B | | 496 | 50 | 7 | 27,0 | 1,06 | 2,8 | 1460 | 819 | 1,1313 |

Art. Nr. are referred to WHITE R01 colour version. For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



ROADS® STF

design Mariano Moroni



PATENTED

5 YEARS
WARRANTY

MATERIAL:

Aluminium heating elements 100x30 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiators and accessories: standard white R01 colour. For other colours see page 388.

PRODUCT CERTIFICATES



HOW TO ORDER THE ROADS® STF

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions and profile | Profile-cover W: MATCHING in colour C: Chrome | Article code of the connection | Article code of the colour/finish Different colour from standard (R01 - R02) surcharge +30% | Constant value |
|----------------|---------------------------------|---|--------------------------------|---|----------------|
| AAAA | BBBB | Z | DDD | EEE | B |

Example

| | | | | | |
|---|---|---|--|---|-----------------------|
| Radiator model Example: Roads Stf radiator 5 Elements | Radiator dimensions Example: 540 mm | Profile-cover Example: matching in colour profile-cover | Article code of the connection Example: connection V11 | Article code of the finish Example: White color R01 | Constant value |
| RS05 | 0540 | W | V11 | R01 | B |


EXAMPLE OF ARTICLE CODE CREATION

In case of a ROADS STF, 5 Elements, H 540 mm, with V11 connection, profile cover in matching colour, white R01 colour.

The article code will be:

RS05 0540 W V11 R01 B


Standard connections

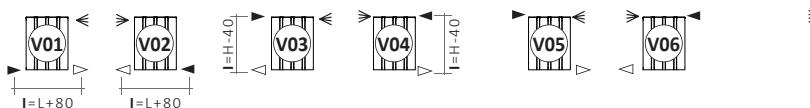

Legend = ▶ In ▷ Out ⚠ Airvent H Height | Pipe Centres L Width □ Connection

Always specify the kind of connection needed when ordering.

Special connections

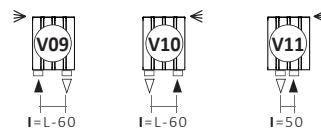

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990310543

Multilayer connection Ø 16 x2
Art. Nr. 5991990310542




Tinta valve pipe centres 50 mm with thermostatic head - right - with pipe covering kit - pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990311243

Multilayer connection Ø 16 x2
Art. Nr. 5991990311242


Accessories and spare parts - see from page 366.

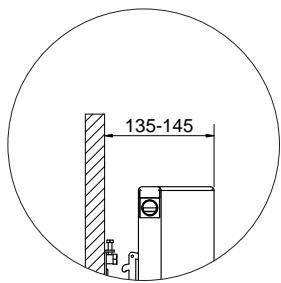

MATCHING IN COLOUR PROFILE COVER (W).



PROFILE COVER IN CHROME FINISHING (C).

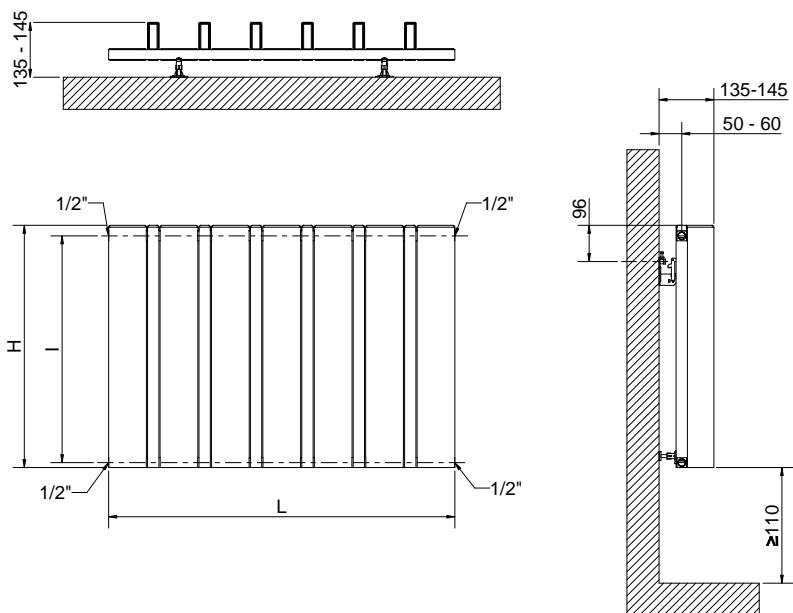**ROADS® STF**

DDD: replace with the type of connection.
Z: replace with type profile cover (W matching in colour - C chrome).

| Art. Nr. | Height | Width | Pipe Centres | Elementes | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | | |
|-----------------------|--------|-------|--------------|-----------|------------|---------|---------------|---------------------|------------|------|--------|
| | | | | | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | | |
| RS05 0540 Z DDD R01 B | 540 | 500 | H [mm] | 372 | 5 | 4,2 | 1,4 | 0,7 | 328 | 178 | 1,1956 |
| RS07 0540 Z DDD R01 B | | | | 508 | 7 | 5,9 | 1,9 | 1 | 459 | 249 | 1,1956 |
| RS09 0540 Z DDD R01 B | | | | 644 | 9 | 7,6 | 2,5 | 1,2 | 590 | 320 | 1,1956 |
| RS11 0540 Z DDD R01 B | | | | 780 | 11 | 9,2 | 3,0 | 1,5 | 721 | 391 | 1,1956 |
| RS13 0540 Z DDD R01 B | | | | 916 | 13 | 10,9 | 3,6 | 1,8 | 852 | 463 | 1,1956 |
| RS15 0540 Z DDD R01 B | | | | 1052 | 15 | 12,6 | 4,0 | 2 | 983 | 534 | 1,1956 |
| RS17 0540 Z DDD R01 B | | | | 1188 | 17 | 14,3 | 4,6 | 2,3 | 1114 | 605 | 1,1956 |
| RS19 0540 Z DDD R01 B | | | | 1324 | 19 | 15,9 | 5,2 | 2,6 | 1245 | 676 | 1,1956 |
| RS21 0540 Z DDD R01 B | | | | 1460 | 21 | 17,6 | 5,7 | 2,8 | 1376 | 747 | 1,1956 |
| RS05 0640 Z DDD R01 B | 640 | 600 | H [mm] | 372 | 5 | 4,9 | 1,6 | 0,8 | 386 | 212 | 1,1748 |
| RS07 0640 Z DDD R01 B | | | | 508 | 7 | 6,8 | 2,3 | 1,1 | 540 | 296 | 1,1748 |
| RS09 0640 Z DDD R01 B | | | | 644 | 9 | 8,7 | 2,9 | 1,4 | 694 | 381 | 1,1748 |
| RS11 0640 Z DDD R01 B | | | | 780 | 11 | 10,7 | 3,6 | 1,7 | 848 | 465 | 1,1748 |
| RS13 0640 Z DDD R01 B | | | | 916 | 13 | 12,6 | 4,3 | 2 | 1002 | 550 | 1,1748 |
| RS15 0640 Z DDD R01 B | | | | 1052 | 15 | 14,5 | 4,8 | 2,3 | 1157 | 635 | 1,1748 |
| RS17 0640 Z DDD R01 B | | | | 1188 | 17 | 16,4 | 5,6 | 2,6 | 1311 | 719 | 1,1748 |
| RS19 0640 Z DDD R01 B | | | | 1324 | 19 | 18,4 | 6,2 | 2,9 | 1465 | 804 | 1,1748 |
| RS21 0640 Z DDD R01 B | | | | 1460 | 21 | 20,3 | 6,9 | 3,2 | 1619 | 898 | 1,1539 |
| RS05 0740 Z DDD R01 B | 740 | 700 | H [mm] | 372 | 5 | 5,5 | 1,9 | 0,9 | 443 | 246 | 1,1539 |
| RS07 0740 Z DDD R01 B | | | | 508 | 7 | 7,7 | 2,7 | 1,2 | 620 | 344 | 1,1539 |
| RS09 0740 Z DDD R01 B | | | | 644 | 9 | 9,9 | 3,4 | 1,5 | 797 | 442 | 1,1539 |
| RS11 0740 Z DDD R01 B | | | | 780 | 11 | 12,1 | 4,2 | 1,9 | 975 | 541 | 1,1539 |
| RS13 0740 Z DDD R01 B | | | | 916 | 13 | 14,2 | 5,0 | 2,2 | 1152 | 639 | 1,1539 |
| RS15 0740 Z DDD R01 B | | | | 1052 | 15 | 16,4 | 5,6 | 2,6 | 1329 | 737 | 1,1539 |
| RS17 0740 Z DDD R01 B | | | | 1188 | 17 | 18,6 | 6,5 | 2,9 | 1506 | 835 | 1,1539 |
| RS19 0740 Z DDD R01 B | | | | 1324 | 19 | 20,8 | 7,3 | 3,2 | 1683 | 933 | 1,1539 |
| RS21 0740 Z DDD R01 B | | | | 1460 | 21 | 23 | 8,0 | 3,6 | 1861 | 1032 | 1,1539 |
| RS05 0840 Z DDD R01 B | 840 | 800 | H [mm] | 372 | 5 | 6,2 | 2,2 | 1 | 501 | 281 | 1,1330 |
| RS07 0840 Z DDD R01 B | | | | 508 | 7 | 8,6 | 3,1 | 1,3 | 701 | 393 | 1,1330 |
| RS09 0840 Z DDD R01 B | | | | 644 | 9 | 11 | 3,9 | 1,7 | 901 | 505 | 1,1330 |
| RS11 0840 Z DDD R01 B | | | | 780 | 11 | 13,5 | 4,8 | 2,1 | 1101 | 617 | 1,1330 |
| RS13 0840 Z DDD R01 B | | | | 916 | 13 | 15,9 | 5,7 | 2,4 | 1301 | 729 | 1,1330 |
| RS15 0840 Z DDD R01 B | | | | 1052 | 15 | 18,3 | 6,4 | 2,8 | 1502 | 842 | 1,1330 |
| RS17 0840 Z DDD R01 B | | | | 1188 | 17 | 20,8 | 7,4 | 3,2 | 1702 | 954 | 1,1330 |
| RS19 0840 Z DDD R01 B | | | | 1324 | 19 | 23,2 | 8,3 | 3,6 | 1902 | 1066 | 1,1330 |
| RS21 0840 Z DDD R01 B | | | | 1460 | 21 | 25,6 | 9,2 | 3,9 | 2102 | 1178 | 1,1330 |

Art. Nr. are referred to WHITE R01 colour version with profile cover in the same colour of the radiator (W) or with chrome profile cover (C). For other colours price has to be increased by 30%.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n



RETRO



EUROPEAN WARRANTY

MATERIAL:

Brass elements

FIXING KIT:

Fixing brackets already integrated on towel rail with plugs and screws included, airvent included, installation instructions.

PACKAGING:

The towel rail is protected by a recyclable film in polyethylene and with a box in recyclable carton.

Use and maintenance notice included.

FINISH:

Chrome, Antique bronze, Antique gold.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C


Available for central heating systems

Connections: n° 2 x G 1/2" - airvent integrated on towel rail

ACCESSORIES


| | | |
|---|---|---|
| Square manual valve kit Antique Gold Copper connection Ø 12/14/15/16 Art. Nr. 5991990311132 Multilayer connection Ø 16 x2 Art. Nr. 5991990311133 | Square manual valve kit Chrome Copper connection Ø 12/14/15/16 Art. Nr. 5991990311134 Multilayer connection Ø 16 x2 Art. Nr. 5991990311135 | Square manual valve kit Antique Bronze Copper connection Ø 12/14/15/16 Art. Nr. 5991990311130 Multilayer connection Ø 16 x2 Art. Nr. 5991990311131 |
|---|---|---|

Accessories and spare parts- see from page 366.

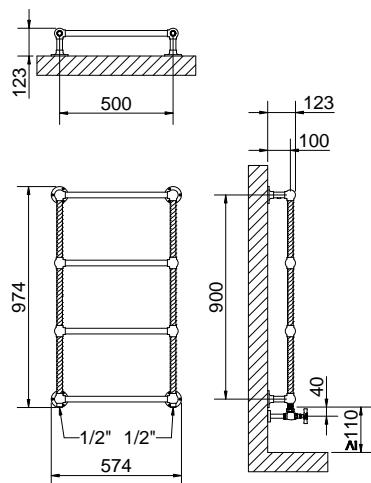


RETRÒ I

| Art. Nr. | Height | Width | Pipe | Finish | Thermal output | |
|---------------|--------|--------|---------|----------------|----------------|-------------------------------|
| | H [mm] | L [mm] | Centres | | Watt | $\Delta t = 50^\circ\text{C}$ |
| 3551330150001 | | | | ANTIQUE GOLD | | |
| 3551330150002 | 975 | 575 | 500 | CHROME | 178 | 85 |
| 3551330150003 | | | | ANTIQUE BRONZE | | |

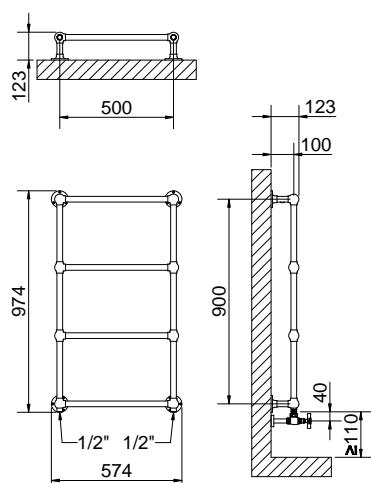

RETRÒ II


| Art. Nr. | Height | Width | Pipe | Finish | Thermal output | |
|---------------|--------|--------|---------|----------------|----------------|-------------------------------|
| | H [mm] | L [mm] | Centres | | Watt | $\Delta t = 50^\circ\text{C}$ |
| 3551330150011 | | | | ANTIQUE GOLD | | |
| 3551330150012 | 975 | 575 | 500 | CHROME | 178 | 85 |
| 3551330150013 | | | | ANTIQUE BRONZE | | |

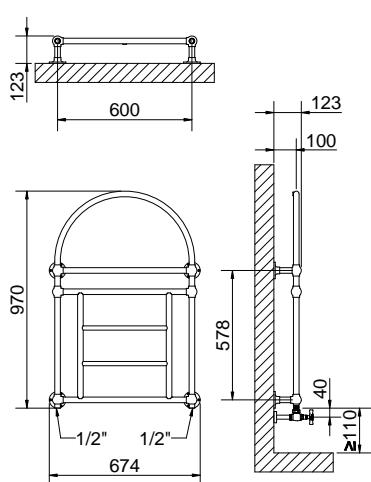

RETRÒ III

| Art. Nr. | Height | Width | Pipe | Finish | Thermal output | |
|---------------|--------|--------|---------|----------------|----------------|-------------------------------|
| | H [mm] | L [mm] | Centres | | Watt | $\Delta t = 50^\circ\text{C}$ |
| 3551330150021 | | | | ANTIQUE GOLD | | |
| 3551330150022 | 970 | 675 | 600 | CHROME | 242 | 116 |
| 3551330150023 | | | | ANTIQUE BRONZE | | |

ACCESSORIES

PIPE COVERING KIT
ANTIQUE GOLD

Art. Nr. 5103000000108

PIPE COVERING KIT
CHROME

Art. Nr. 5103000000044

PIPE COVERING KIT
ANTIQUE BRONZE

Art. Nr. 5103000000109

Accessories and spare parts - see from page 366.



RETRO ELECTRIC



EUROPEAN WARRANTY

MATERIAL:

Brass elements

FIXING KIT:

Fixing brackets already integrated on towel rail with plugs and screws included, installation instructions.

PACKAGING:

The towel rail is protected by a recyclable film in polyethylene and with a box in recyclable carton.

Use and maintenance notice included.

FINISH:

Chrome, Antique bronze, Antique gold.

PRODUCT CERTIFICATES



Electrical resistors: CLASS 1

Minimum class protection: IP 55

Wire Length: 1500 mm

Electrical only: Cable without electrical plug, to be connected to the power supply with a switch (not included), and protection device (not included). Refer to the local regulations for electrical networks. Cable without plug to be connected on a ON-OFF switcher- not included

ACCESSORIES



Pipe covering kit
ANTIQUE GOLD

Art. Nr. 5103000000077



Pipe covering kit
CHROME


Art. Nr. 5103000000080



Pipe covering kit
ANTIQUE BRONZE


Art. Nr. 5103000000078

Accessories and spare parts- see from page 366.

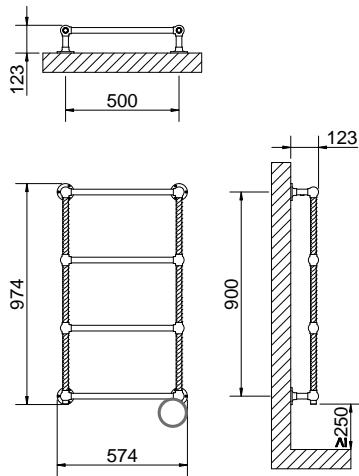


RETRO I ELECTRIC

| Art. Nr. | Height | Width | Finish | Watt |
|--------------|--------|--------|----------------|------|
| | H [mm] | L [mm] | | |
| 358133000001 | | | ANTIQUE GOLD | |
| 358133000002 | 975 | 575 | CHROME | 100 |
| 358133000003 | | | ANTIQUE BRONZE | |

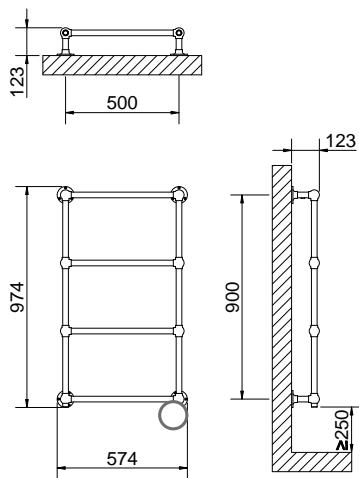

RETRO II ELECTRIC

| Art. Nr. | Height | Width | Finish | Watt |
|--------------|--------|--------|----------------|------|
| | H [mm] | L [mm] | | |
| 358133000011 | | | ANTIQUE GOLD | |
| 358133000012 | 975 | 575 | CHROME | 100 |
| 358133000013 | | | ANTIQUE BRONZE | |

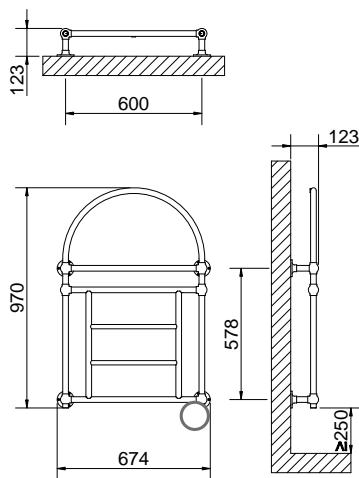

RETRO III ELECTRIC

| Art. Nr. | Height | Width | Finish | Watt |
|--------------|--------|--------|----------------|------|
| | H [mm] | L [mm] | | |
| 358133000021 | | | ANTIQUE GOLD | |
| 358133000022 | 970 | 675 | CHROME | 150 |
| 358133000023 | | | ANTIQUE BRONZE | |

FRAME PICTURE
TRENDS

MACRO NATURAL



FRAME PICTURE
TRENDS

ETEREO





INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSIONES
TECHNICAL SUPPORT

FRAME PICTURE
TRENDS

POP MEMORY



INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSIONES
TECHNICAL SUPPORT





FRAME PICTURE TRENDS



TRENDS SERIES

Available sizes da pag. 336.

MACRO NATURAL



MACRO NATURAL
01
(G29)

MACRO NATURAL
02
(G30)

MACRO NATURAL
03
(G31)

MATERIA



MATERIA
01
(G35)

MATERIA
02
(G36)

MATERIA
03
(G37)

ETERO



ETERO
01
(G26)

ETERO
02
(G27)

ETERO
03
(G28)

POP MEMORY



POP MEMORY
01
(G32)

POP MEMORY
02
(G33)

POP MEMORY
03
(G34)

LIVING
KITCHEN
BEDROOM
BATHROOM
COFFEE BAR
RESTAURANT
OFFICE
LOFT
TEEN ROOM

HOW TO ORDER THE FRAME PICTURE

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Model code |
|----------------|---------------------|--------------------------------|--|
| AAAA | BBB CC | DDD | Frame Macro Natural 01: G29 Frame Macro Natural 02: G30 Frame Macro Natural 03: G31 Frame Materia 01: G35 Frame Materia 02: G36 Frame Materia 03: G37 Frame Etereo 01: G26 Frame Etereo 02: G27 Frame Etereo 03: G28 Frame Pop Memory 01: G32 Frame Pop Memory 02: G33 Frame Pop Memory 03: G34 |
| | | | B |

EXAMPLE

| | | |
|--------------------------------|--------|-------------------------------------|
| Radiator model | FRST | Example: Frame |
| Radiator dimensions | 464 18 | Example: mm 464x1822 |
| Article code of the connection | V11 | connection H01 |
| Model code | G29 | Example: Frame Macro Natural 01 G29 |
| Constant value | B | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME MACRO NATURAL 01 464x1822 mm, with V11 connection.

The article code will be:

FRST 464 18 V11 G29 B

FRAME PICTURE

- For technical features and connections see page 282-283.

HOW TO ORDER THE FRAME PICTURE PLUS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Model code |
|----------------|---------------------|--------------------------------|--|
| AAAA | BBB CC | DDD | Frame Macro Natural 01: G29 Frame Macro Natural 02: G30 Frame Macro Natural 03: G31 Frame Materia 01: G35 Frame Materia 02: G36 Frame Materia 03: G37 Frame Etereo 01: G26 Frame Etereo 02: G27 Frame Etereo 03: G28 Frame Pop Memory 01: G32 Frame Pop Memory 02: G33 Frame Pop Memory 03: G34 |
| | | | B |

EXAMPLE

| | | |
|--------------------------------|--------|-------------------------------|
| Radiator model | FRPL | Example: Radiatore Frame plus |
| Radiator dimensions | 464 18 | Example: mm 464x1822 |
| Article code of the connection | V09 | connection V09 |
| Model code | G35 | Example: Frame Materia 01 G35 |
| Constant value | B | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME MATERIA 01 PLUS 464x1822 mm, with V09 connection.

The article code will be:

FRPL 464 18 V09 G35 B

FRAME PICTURE PLUS

- For technical features and connections see page 284-285.

HOW TO ORDER THE FRAME PICTURE MAX

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Model code |
|----------------|---------------------|--------------------------------|--|
| AAAA | BBB CC | DDD | Frame Macro Natural 01: G29 Frame Macro Natural 02: G30 Frame Macro Natural 03: G31 Frame Materia 01: G35 Frame Materia 02: G36 Frame Materia 03: G37 Frame Etereo 01: G26 Frame Etereo 02: G27 Frame Etereo 03: G28 Frame Pop Memory 01: G32 Frame Pop Memory 02: G33 Frame Pop Memory 03: G34 |
| | | | B |

EXAMPLE

| | | |
|--------------------------------|--------|------------------------------|
| Radiator model | FRMX | Example: Radiatore Frame Max |
| Radiator dimensions | 464 18 | Example: mm 464x1822 |
| Article code of the connection | V10 | connection V10 |
| Model code | G26 | Example: Frame Etereo 01 G26 |
| Constant value | B | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a FRAME MAX ETEREO 01 464x1822 mm, with V10 connection.

The article code will be:

FRMX 464 18 V10 G26 B

FRAME PICTURE MAX

- For technical features and connections see page 288-289.

FRAME PICTURE TRENDS

Available sizes: **MACRO NATURAL**

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

MACRO NATURAL


The energy of nature



Nature escapes us yet we feel the daily need to lead us back to it: more and more often the architectural and environments are pervaded by greenery, plant walls or other spaces designed specifically to welcome it and make it an integral part of our life. Different housing trends have been influenced by it, defined as "eco-style" or "eco-chic", which aim at the integration of colors, objects, and natural materials within the environments to make them warmer and less artificial. This is how finishes, architectural forms, chromatic tones, walls and furnishing accessories are inspired or sometimes imitating the world of a hidden and wonderful nature that always offers great charm to the observer. The Frame Trends Macro Natural line is inspired by this trend and with its three versions nature enters the environment giving you a unique and relaxing style.



MACRO NATURAL 01

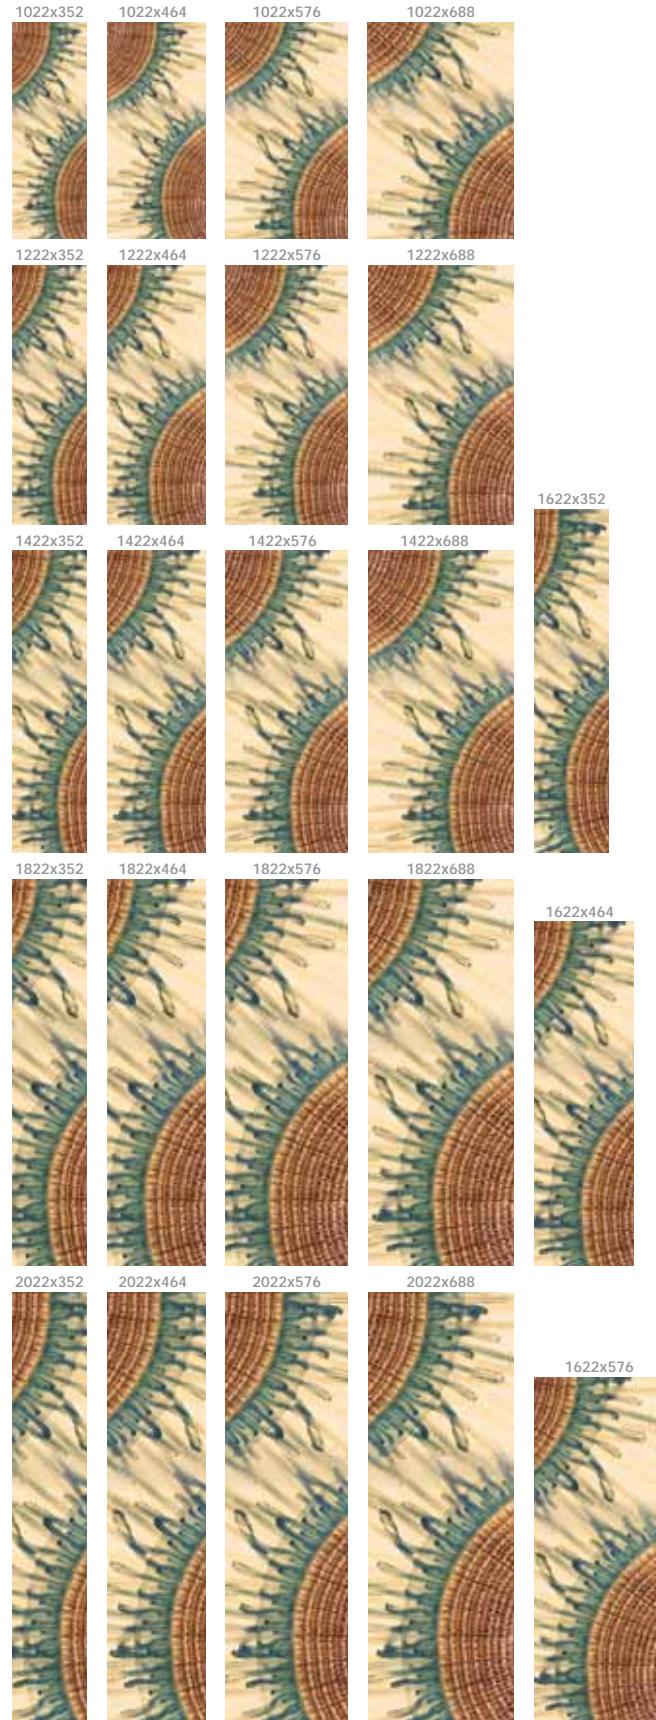

FRAME PICTURE TRENDS


Available sizes: **MACRO NATURAL**

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

MACRO NATURAL 02



MACRO NATURAL 03

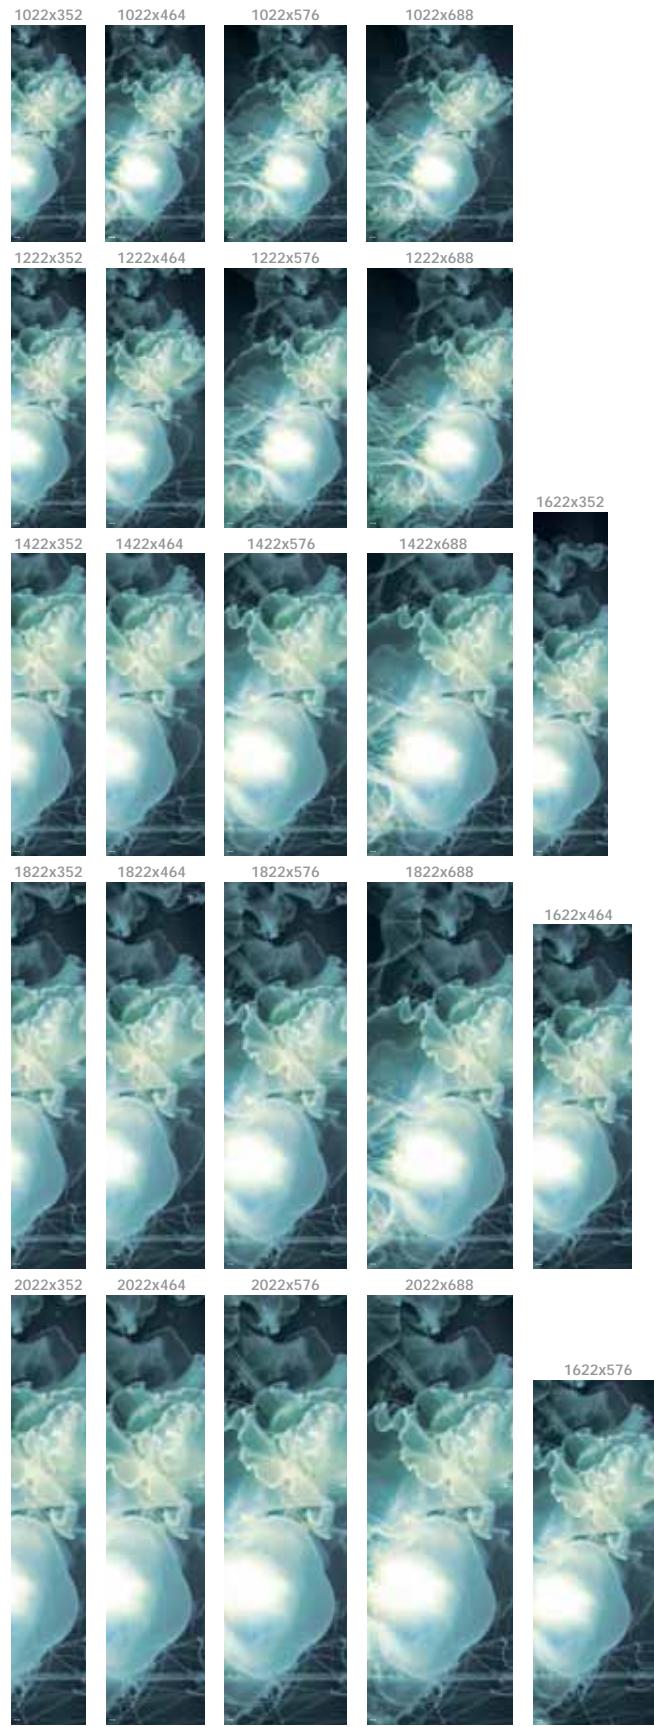

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

FRAME PICTURE TRENDS

Available sizes: **MATERIA**

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

MATERIA

Vintage style




It represents the evolution of the industrial style, merged with the trail that the strong vintage trend has left. However, everything is revisited in a more neutral key, where the protagonists are the materials, left raw and unfinished to create a strong contrast with the furnishing objects placed inside. The interiors are real scenographies with strong suggestions, which seem places recovered from the past, but combined with modern furnishing elements and often heterogeneous in style. Walls and wall finishes imitate raw concrete, often combined with surfaces and objects in living wood, with a deliberately unfinished appearance, to recreate the effect of an object recovered from the past.

The Frame Trends Materia line is certainly the most decisive version of the four Frame Trends styles, with its three graphic variants with a grunge character that recalls the industrial and metropolitan style.



MATERIA 01

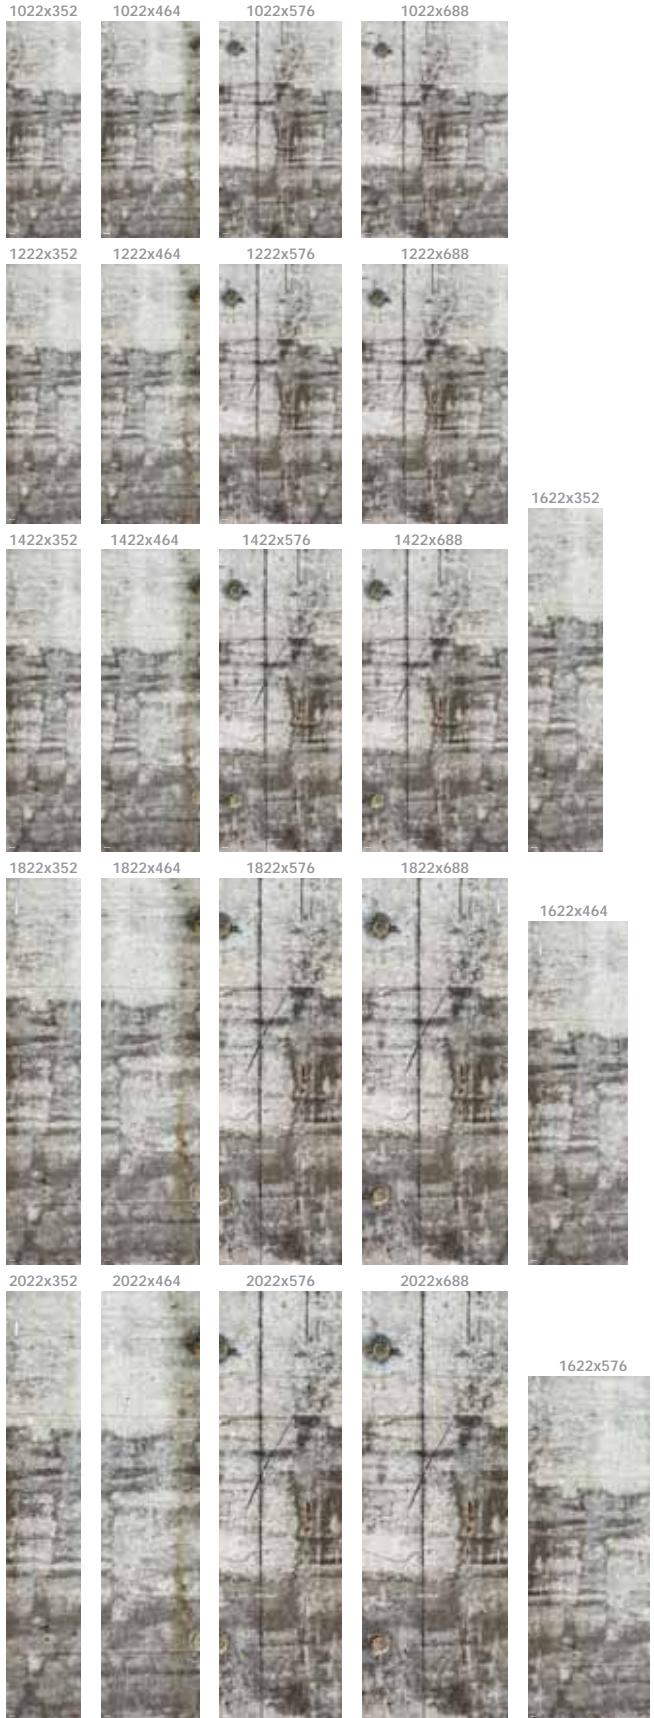

FRAME PICTURE TRENDS


Available sizes: **MATERIA**

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

MATERIA 02



MATERIA 03

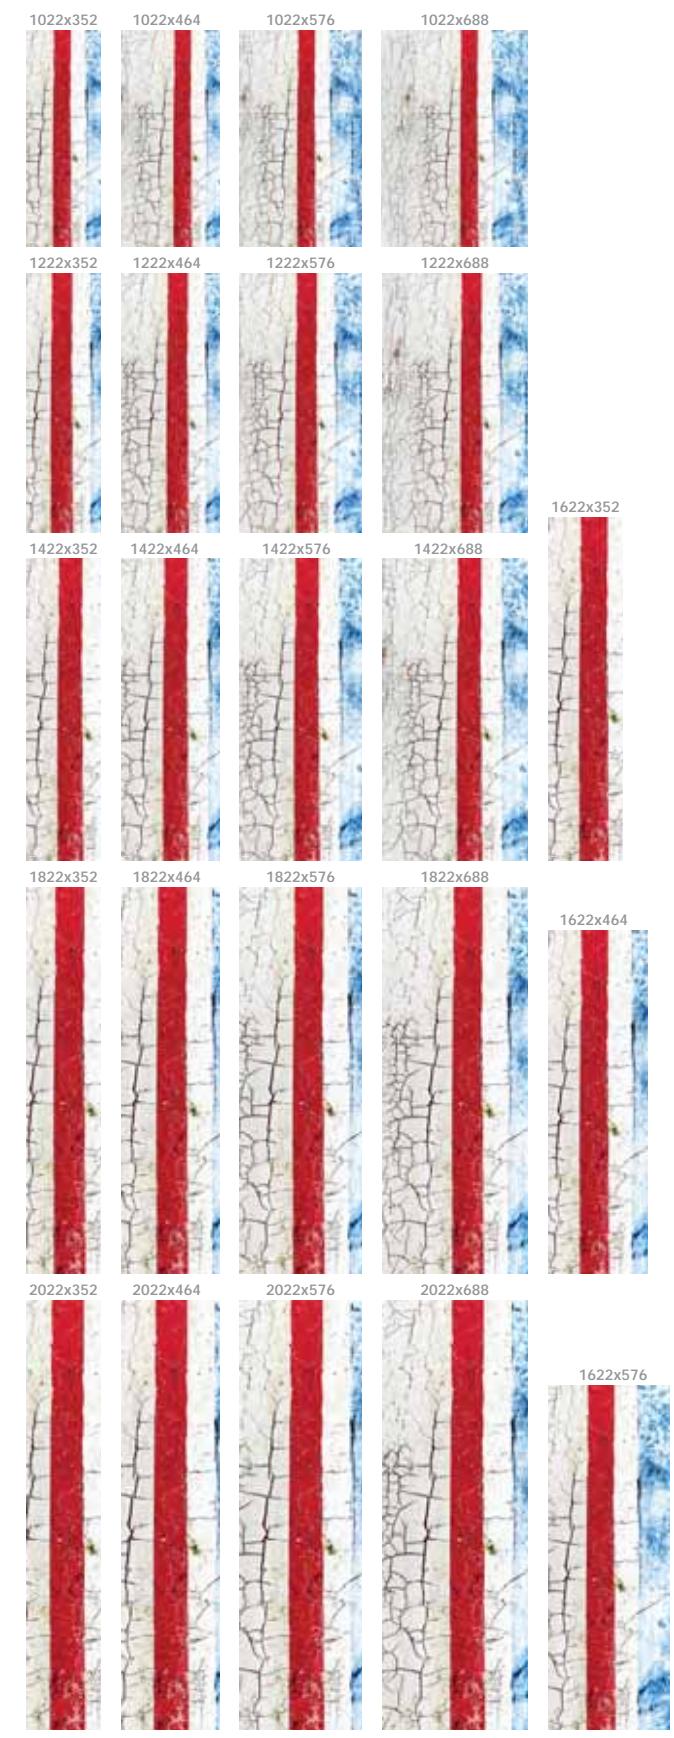

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

FRAME PICTURE TRENDS

Available sizes: **ETEREO**

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

ETEREO

Effects of lights and shadows




It arises from the desire to lose the connection from reality, so hard and material, rising towards a more ethereal dimension, where you can relax your mind and body and rediscover your inner purity. The environments under the influence of this trend are made up of light colors, tending to white, combined with natural materials and transparencies that make the material impalpable.

Play of shades and lights with imperceptible contours merge exterior and interior and reconnect the outside, the natural element is present but in a pure and essential way. The furniture is minimal and using lights and shadows an intense and meditative atmosphere is created. With this influence the tree radiator versions of the Frame Trends Etereo line are born, which combine the already clean and neutral lines of the radiator with pure graphics that give purity and lightness to any environment, both living and bathroom.



ETEREO

01



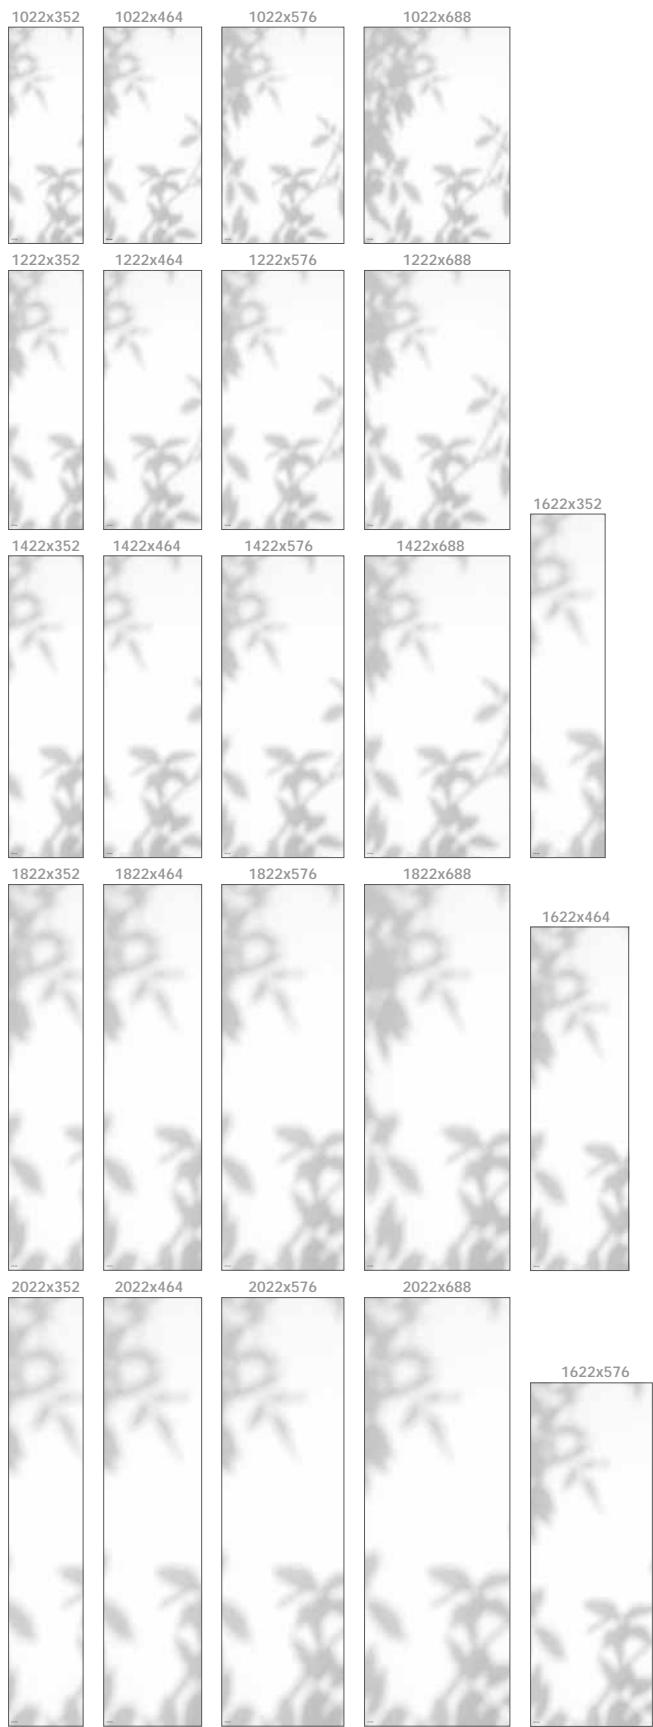


FRAME PICTURE TRENDS




Available sizes: **ETEREO**

Applicable on models: **FRAME - FRAME PLUS - FRAME MAX**

**ETEREO
02**

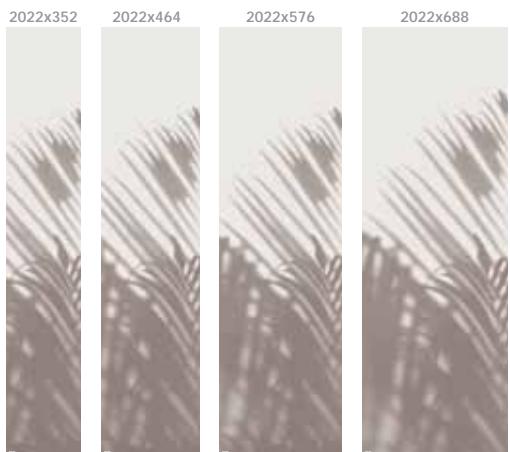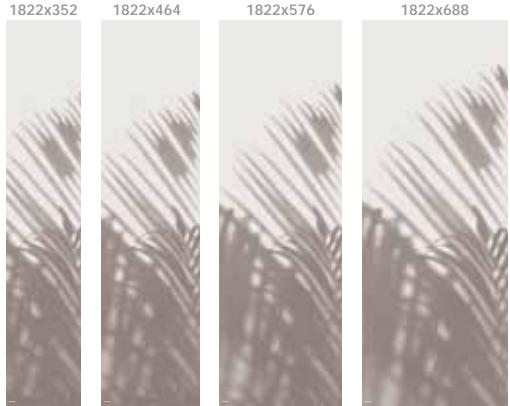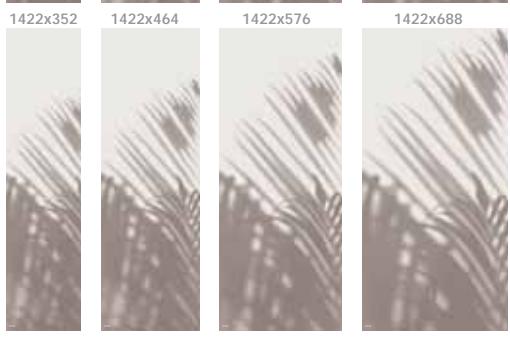

**ETEREO
03**

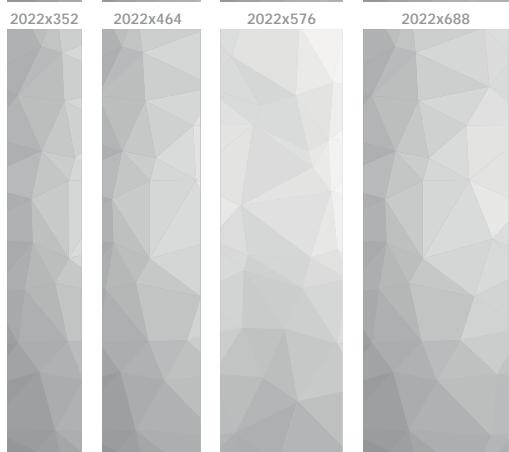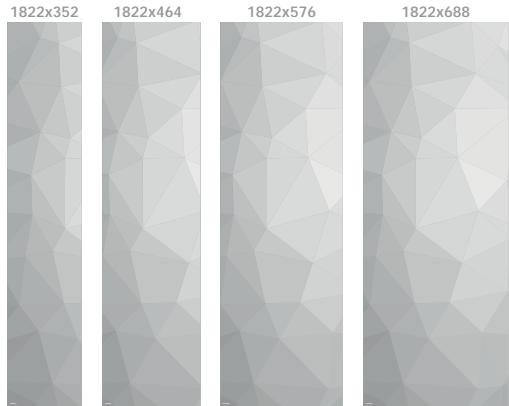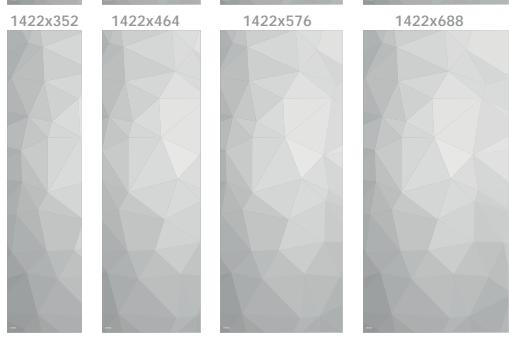

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSIONS
TECHNICAL SUPPORT

FRAME PICTURE TRENDS

Available sizes: **POP MEMORY**

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

POP MEMORY

Geometric style



This trend, which probably starts from the world of fashion, brings to light the graphic and chromatic styles of the world of Pop Art using comic slogans, bright colors, and icons typical of those years.


Interior design also intercepts other trends, such as "eclectic style" or "geometric style" in which we witness the combination of heterogeneous patterns with two dimensional and geometric shapes, stripes, polka dots and vibrant or contrasting colors such as black and white.

Three unique radiator variants for the new Frame Trends Pop Memory line, furnishing elements with an unmistakable style and a strong chromatic impact, capable of playing down and giving character to environment.



POP MEMORY

01

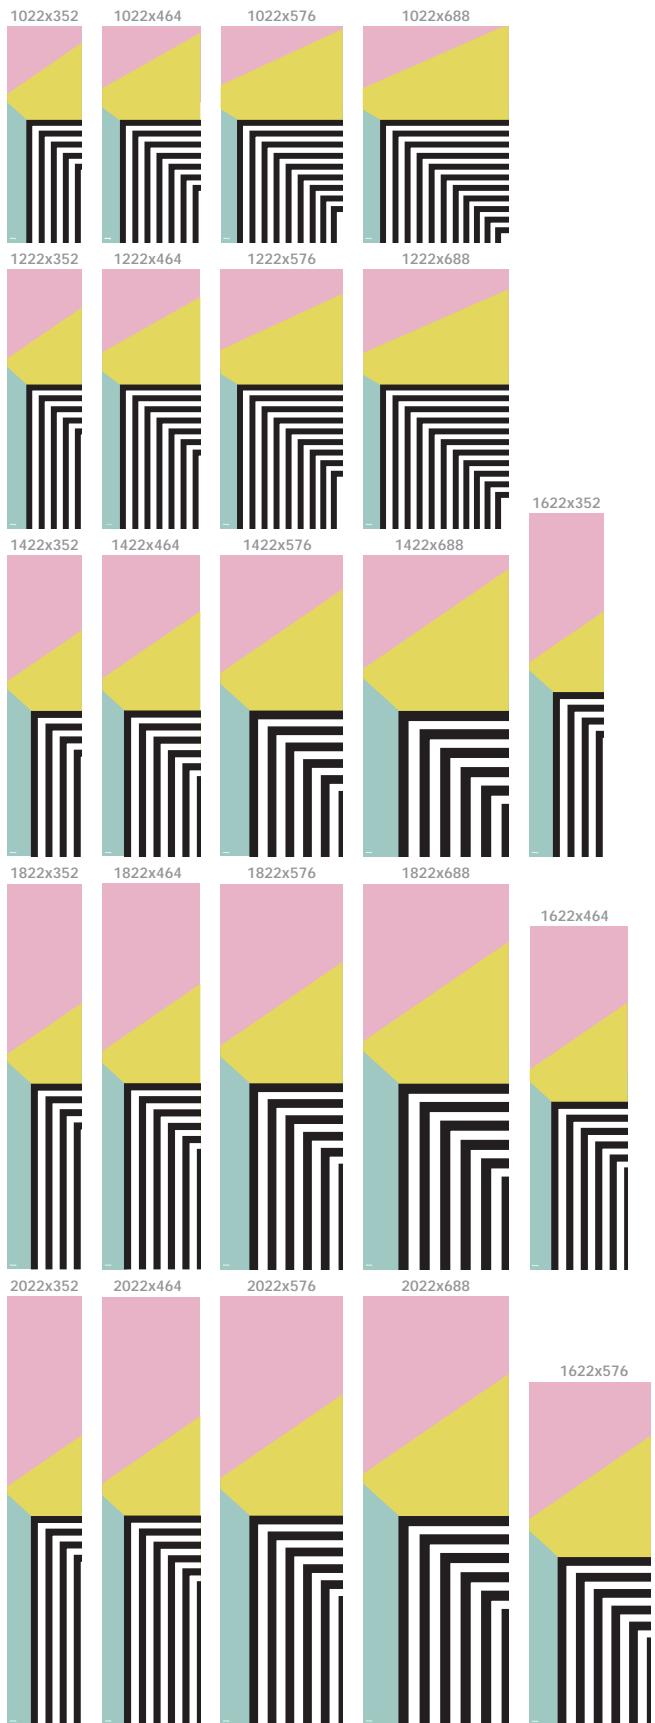


FRAME PICTURE TRENDS


Available sizes: **POP MEMORY**

Applicable on models: **FRAME - FRAME PLUS - FRAME MAX**

POP MEMORY 02

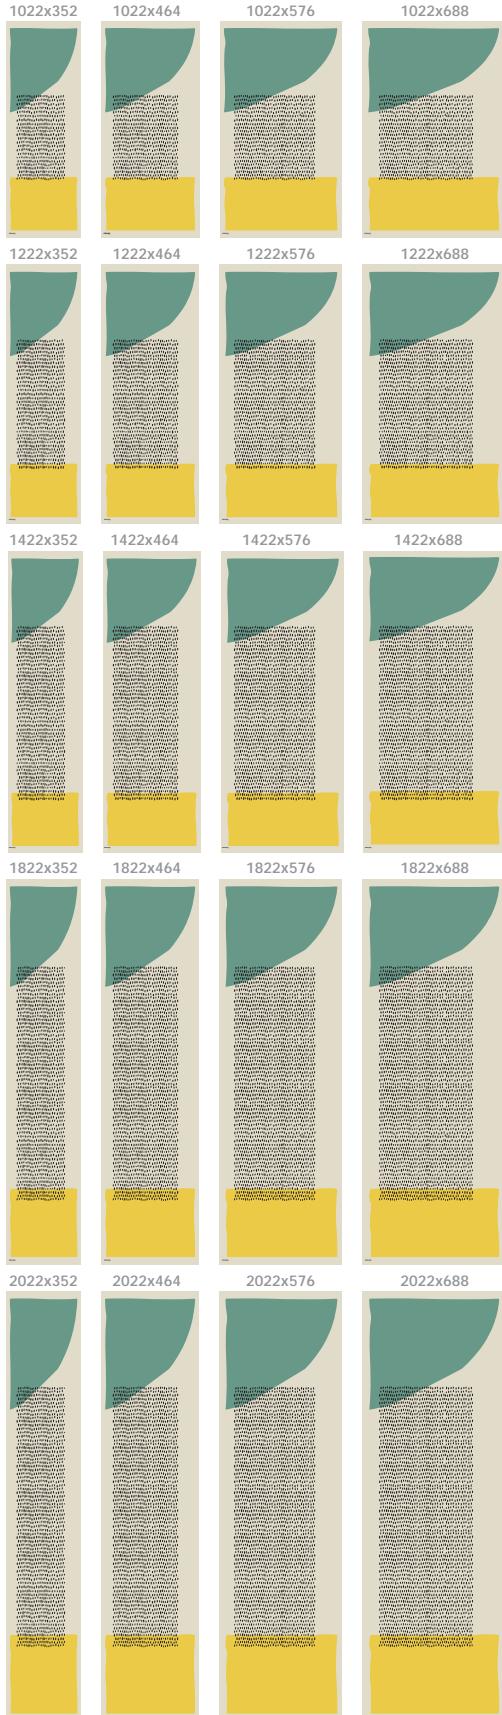

POP MEMORY 03

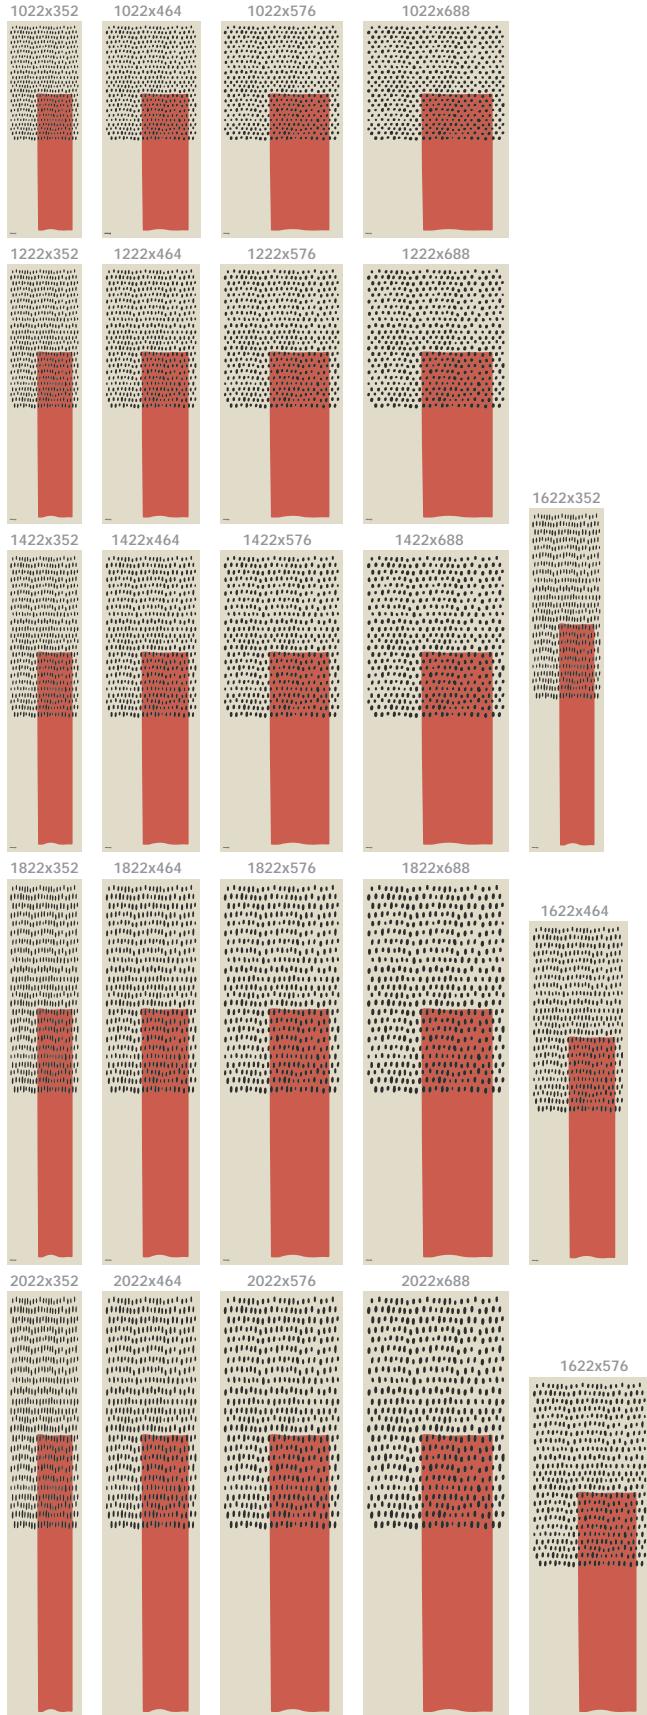

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT



FRAME PICTURE



page 180

Customize the:


- FRAME
 - FRAME PLUS
 - FRAME MAX

radiators with your favourite pictures, forever imprinted on the surface.

**5 YEARS
WARRANTY**

| FRAME | | FRAME PLUS | | FRAME MAX | |
|-------------|-----------|-------------|-----------|-------------|-----------|
| Height | Width | Height | Width | Height | Width |
| H [mm] | L [mm] | H [mm] | L [mm] | H [mm] | L [mm] |
| 352 | | 352 | | 352 | |
| 1022 | | 1022 | | 1022 | |
| 464 | | 464 | | 464 | |
| 576 | | 576 | | 576 | |
| 688 | | 688 | | 688 | |
| 352 | | 352 | | 352 | |
| 1222 | | 1222 | | 1222 | |
| 464 | | 464 | | 464 | |
| 576 | | 576 | | 576 | |
| 688 | | 688 | | 688 | |
| 352 | | 352 | | 352 | |
| 1422 | | 1422 | | 1422 | |
| 464 | | 464 | | 464 | |
| 576 | | 576 | | 576 | |
| 688 | | 688 | | 688 | |
| 352 | | 352 | | 352 | |
| 1622 | | 1622 | | 1622 | |
| 464 | | 464 | | 464 | |
| 576 | | 576 | | 576 | |
| 352 | | 352 | | 352 | |
| 1822 | | 1822 | | 1822 | |
| 464 | | 464 | | 464 | |
| 576 | | 576 | | 576 | |
| 688 | | 688 | | 688 | |
| 352 | | 352 | | 352 | |
| 2022 | | 2022 | | 2022 | |
| 464 | | 464 | | 464 | |
| 576 | | 576 | | 576 | |
| 688 | | 688 | | 688 | |

For technical features and connections see **FRAME / FRAME PLUS / FRAME MAX** from page 282.

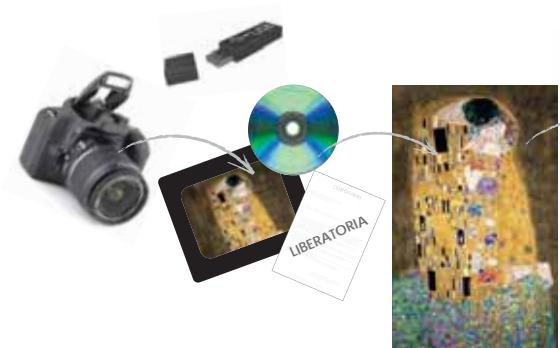

HOW TO ORDER CUSTOM IMAGES (P99)

- Choose between FRAME / FRAME PLUS / FRAME MAX (painted model).
 - Select the size (H and L) and the connection type.
 - Send your high resolution image (300 dpi- jpg, tiff, eps file), or your real picture. (*Material used for rendering will not be given back*).
 - Send the relevant acquittance to Cordivari dealer (*All images send by customer must respect all relevant rules of copyright*).
 - Our graphic team will size the desired image on the selected radiator.
 - Approve the pdf preview and order.



HOW TO ORDER STANDARD IMAGES CORDIVARI

- Choose between FRAME / FRAME PLUS / FRAME MAX (painted model).
 - Select the size (H and L) and the connection type.
 - Choose a picture from our image gallery.
 - Approve the pdf preview and order.

IMAGE GALLERY



Frame Picture radiators are made in painted carbon steel using a unique and everlasting painting process. The Frame Picture painting process was awarded by ANVER (Italian Painters Association), during "Polveri" Exhibition (Verona, Italy), where it stood out for its innovation, high quality finishing and environment friendly approach.

PHOTOS

by Piero e Italo Del Governatore - ITALCOLOR



FISHER (P09)



BAY (P10)



SHORE (P11)



Bay



Shore

PICTURES



IL BACIO (P08)



I GIRASOLI (P31)



DUE DONNE TAHITIANE (P32)



COMPOSIZIONE VIII (P33)



RIVER (P18)



PARIS (P07)



LANDSCAPE (P05)



LAKE (P06)



River



I girasoli



Lake

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT



Artic



Lagoon Azul

FRAME PICTURE GRAPHIC



page 180

The images of the **GRAPHIC SERIES (G)** have been carefully sized on the radiator to obtain the best graphic balance.

The ordered product will portray the image as presented in the catalog.

All available solutions are available on the following pages.

This procedure streamlines the timing by allowing the immediate creation of the code number as shown on the opposite page.



Corallo



Iris 03



Season 06

GRAPHIC SERIES

Available sizes from page 348.

CORALLO
(G09)ARTIC
(G10)LAGOON AZUL
(G21)IRIS 03
(G23)

FRAME SEASON - artwork by Mariano Moroni

SEASON 03
(G13)SEASON 04
(G14)SEASON 05
(G15)SEASON 06
(G16)

HOW TO ORDER THE FRAME PICTURE

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Model code | Constant value |
|----------------|---------------------|--------------------------------|--|----------------|
| AAAA | BBB CC | DDD | Frame Artic: G10 Frame Corallo: G09 Frame Lagoon Azul: G21 Frame Iris 03: G23 Frame Season 03: G13 Frame Season 04: G14 Frame Season 05: G15 Frame Season 06: G16 Frame custom radiator: P99 | B |

Example

| | | |
|--------------------------------|--------|----------------------------|
| Radiator model | FRST | Example: Frame |
| Radiator dimensions | 464 18 | Example: mm 464x1822 |
| Article code of the connection | V11 | Example: connection H01 |
| Model code | G09 | Example: Frame Corallo G09 |
| Constant value | B | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a Frame CORALLO 464x1822 mm, with V11 connection.

The article code will be:

FRST 464 18 V11 G09 B

FRAME PICTURE

- For technical features and connections see page 282-283.

HOW TO ORDER THE FRAME PICTURE PLUS

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Model code | Constant value |
|----------------|---------------------|--------------------------------|--|----------------|
| AAAA | BBB CC | DDD | Frame Artic: G10 Frame Corallo: G09 Frame Lagoon Azul: G21 Frame Iris 03: G23 Frame Season 03: G13 Frame Season 04: G14 Frame Season 05: G15 Frame Season 06: G16 Frame custom radiator: P99 | B |

Example

| | | |
|--------------------------------|--------|--------------------------|
| Radiator model | FRPL | Example: Frame Plus |
| Radiator dimensions | 464 18 | Example: mm 464x1822 |
| Article code of the connection | V11 | Example: connection H01 |
| Model code | G10 | Example: Frame ARTIC G10 |
| Constant value | B | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a Frame ARTIC PLUS 464x1822 mm, with V11 connection.

The article code will be:

FRPL 464 18 V11 G10 B

FRAME PICTURE PLUS

- For technical features and connections see page 284-285.

HOW TO ORDER THE FRAME PICTURE MAX

ARTICLE CODE STRUCTURE

| Radiator model | Radiator dimensions | Article code of the connection | Model code | Constant value |
|----------------|---------------------|--------------------------------|--|----------------|
| AAAA | BBB CC | DDD | Frame Artic: G10 Frame Corallo: G09 Frame Lagoon Azul: G21 Frame Iris 03: G23 Frame Season 03: G13 Frame Season 04: G14 Frame Season 05: G15 Frame Season 06: G16 Frame custom radiator: P99 | B |

Example

| | | |
|--------------------------------|--------|-------------------------|
| Radiator model | FRMX | Example: Frame Max |
| Radiator dimensions | 464 18 | Example: mm 464x1822 |
| Article code of the connection | V11 | Example: connection H01 |
| Model code | G23 | Example: Frame IRIS 03 |
| Constant value | B | |

EXAMPLE OF ARTICLE CODE CREATION

In case of a Frame MAX IRIS 03 464x1822 mm, with V11 connection.

The article code will be:

FRMX 464 18 V11 G23 B

FRAME PICTURE MAX

- For technical features and connections see page 288-289.

FRAME PICTURE


Available sizes: CORALLO - ARTIC

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

FRAME CORALLO G09



FRAME ARTIC G10

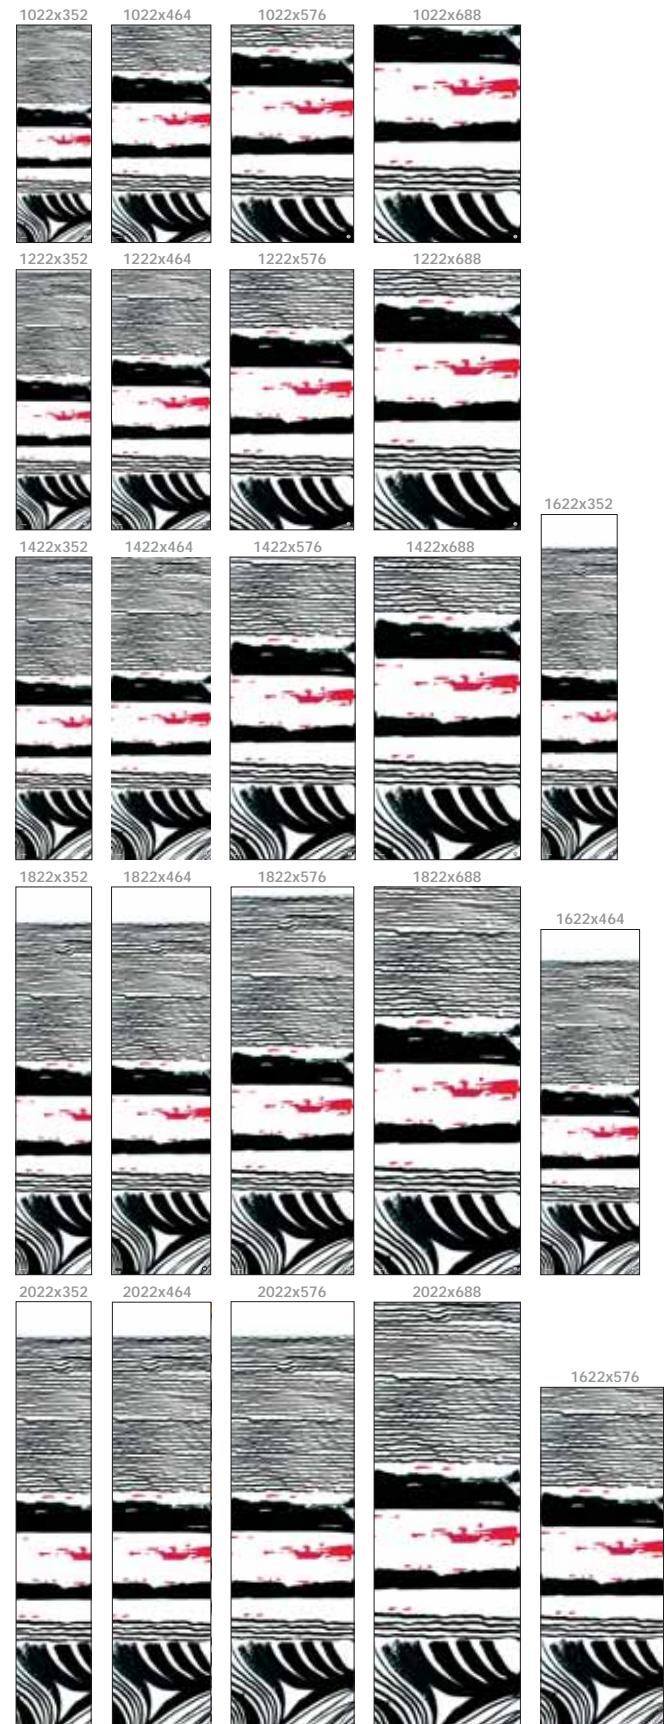


FRAME PICTURE


Available sizes: LAGOON AZUL - IRIS 03

Applicable on models: FRAME - FRAME PLUS - FRAME MAX

FRAME LAGOON AZUL G21

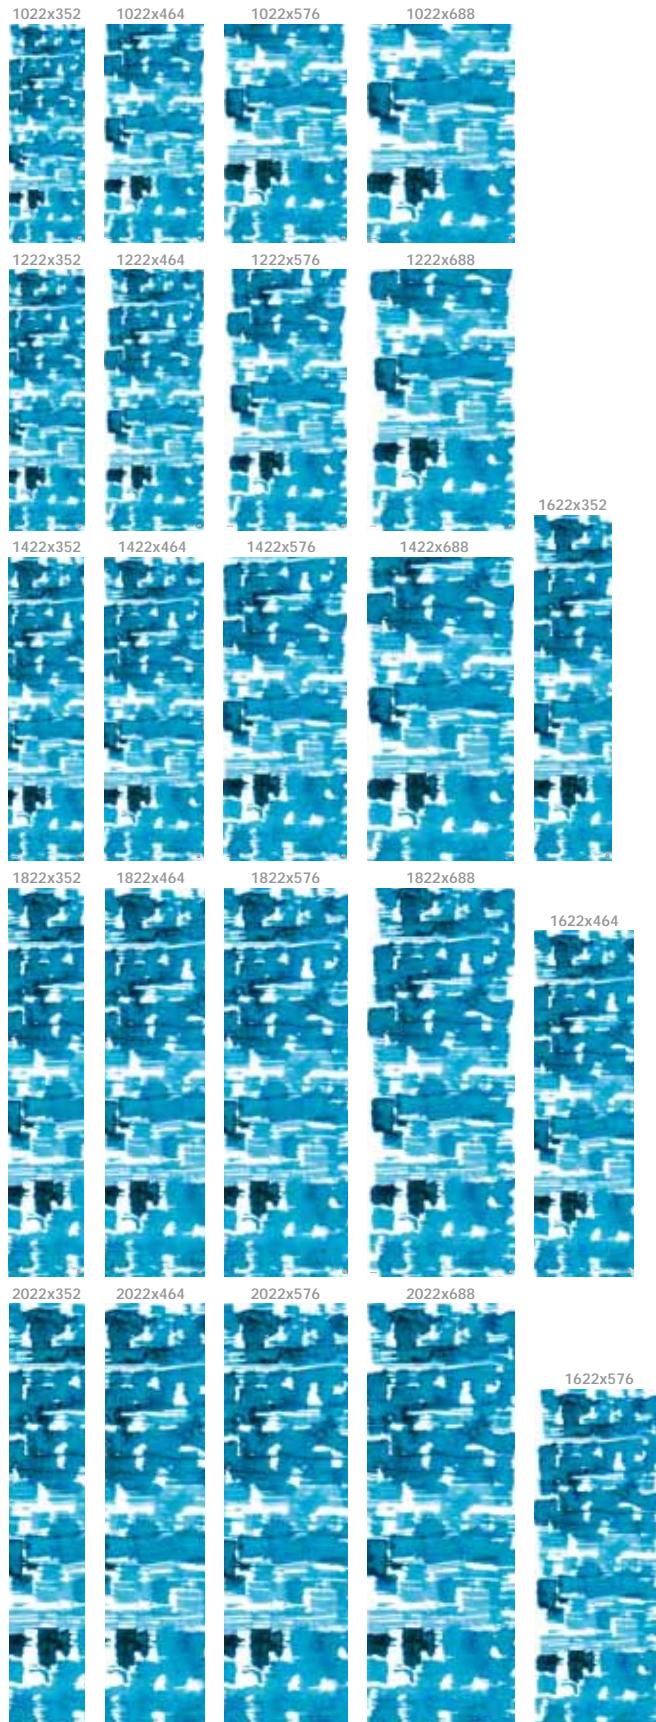

FRAME IRIS 03 G23

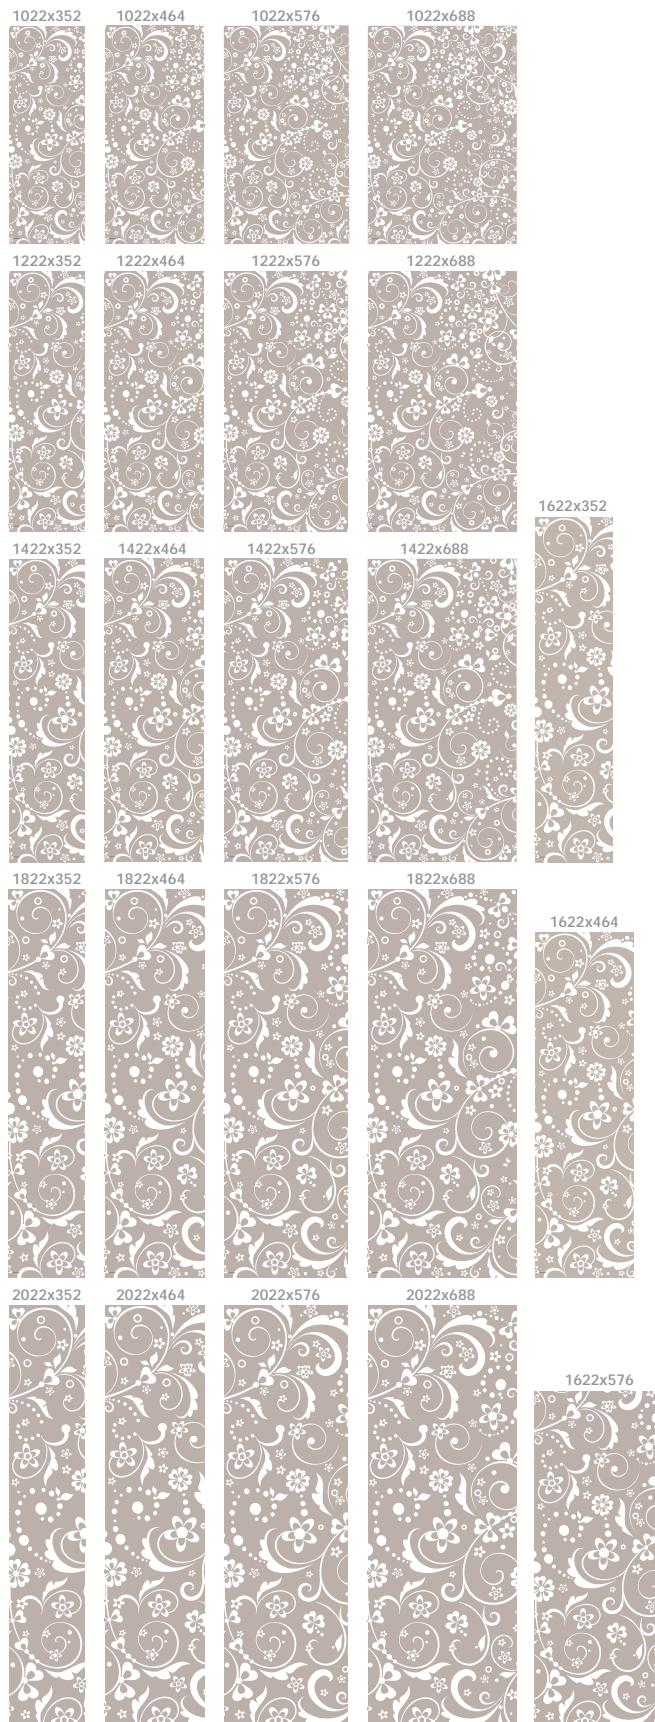

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

FRAME PICTURE

Available sizes: SEASON

Applicable on models: FRAME - FRAME PLUS - FRAME MAX


FRAME SEASON 03

G13



FRAME SEASON 04

G14

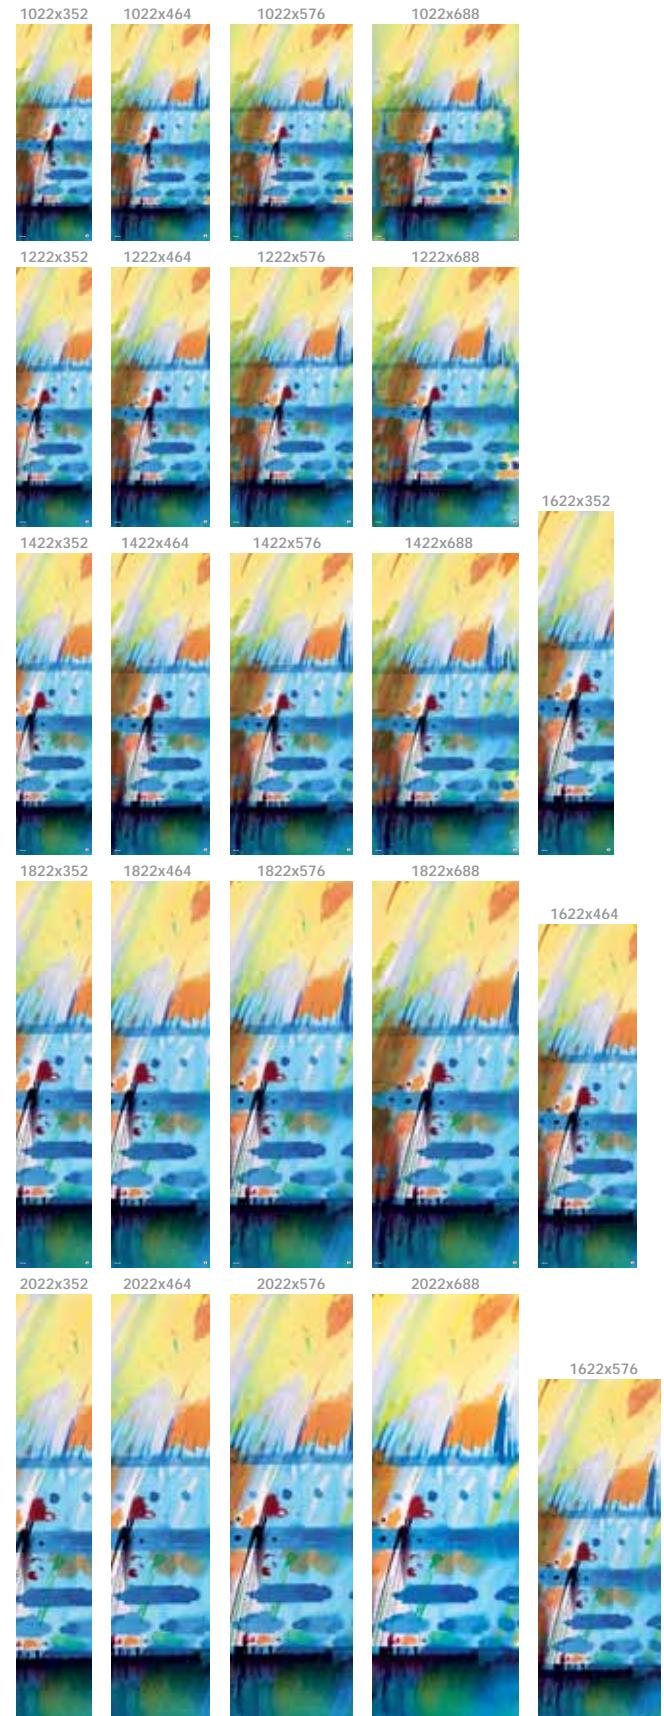


FRAME PICTURE

Available sizes: SEASON

Applicable on models: FRAME - FRAME PLUS - FRAME MAX


FRAME SEASON 05

G15

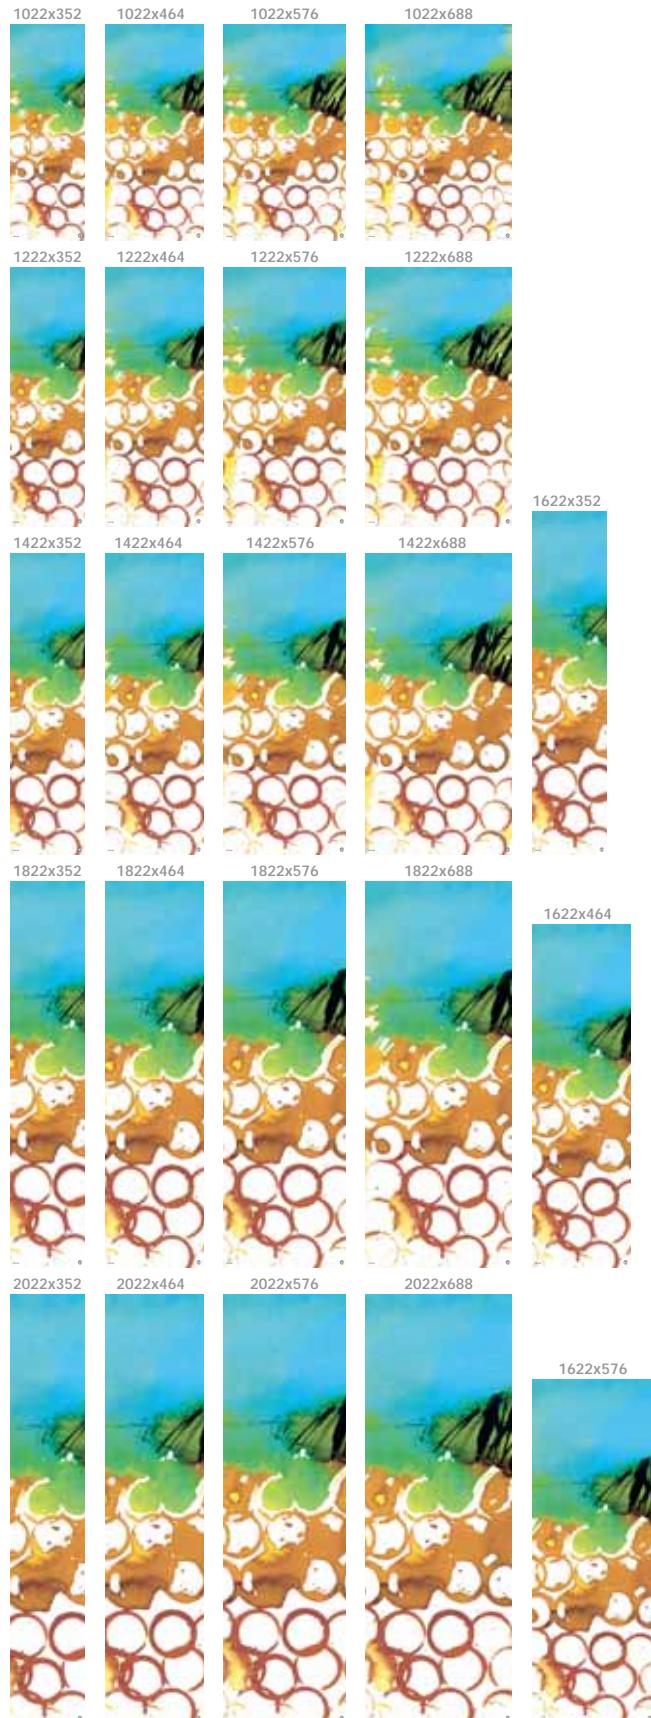

FRAME SEASON 06

G16

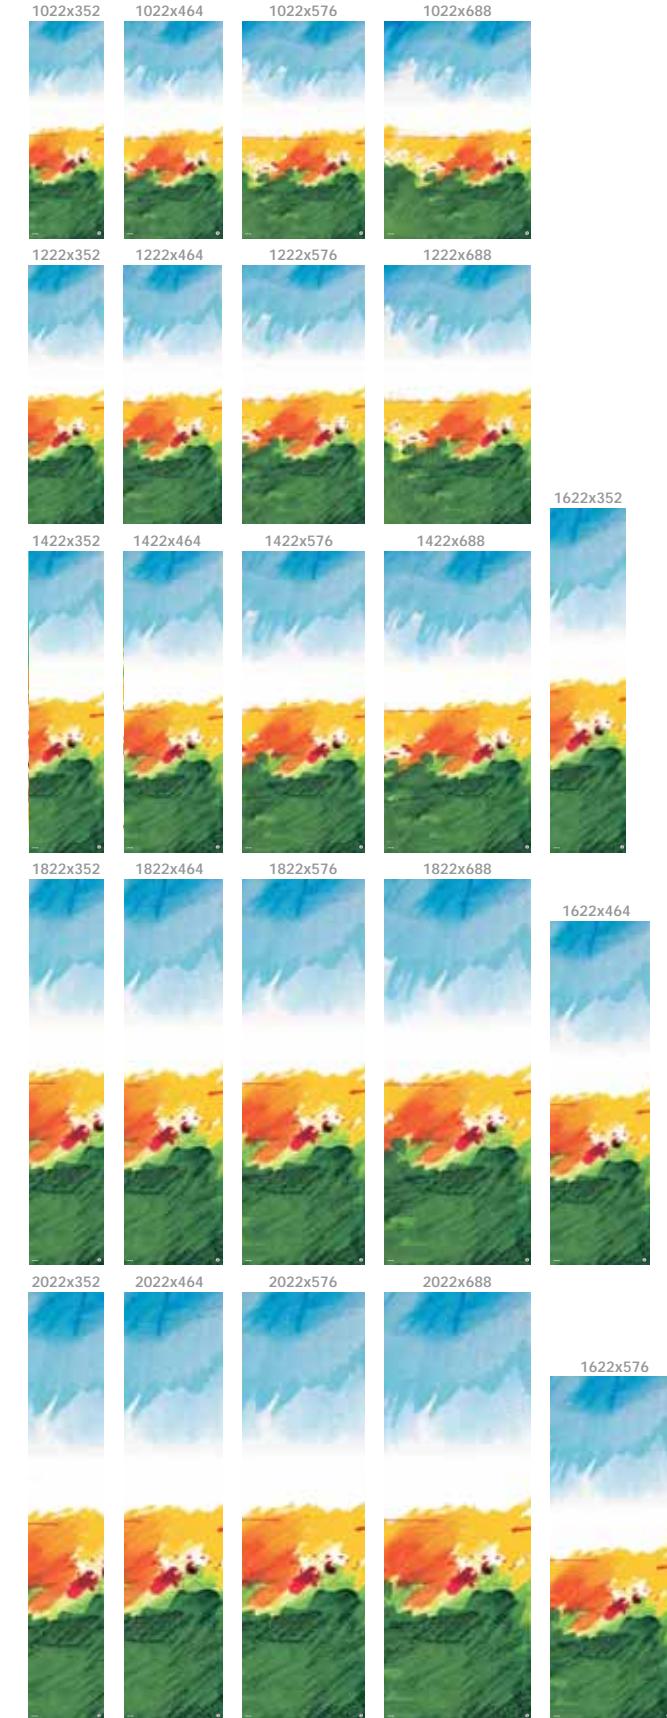

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT



FRAME PICTURE

CONVIVIUM

artwork Mariano Moroni



page 354

**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collector in painted mild steel with ϕ of 30 mm.
Heating elements in painted mild steel.
Heating plate in painted mild steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4 (only for Frame).

PACKAGING:

The radiator is protected by a wooden crate and carton.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

HOW TO ORDER THE FRAME CONVIVIUM RADIATORS

ARTICLE CODE STRUCTURE

| Radiator model Standard FRST Plus FRPL- Max FRMX | Radiator dimensions | Article code of the connection | Model code Frame Convivium: G24 | Constant value |
|--|---------------------|-----------------------------------|------------------------------------|----------------|
| AAAA | BBB CC | DDD | EEE | B |

Example

| | | | | |
|---|---|--|---|----------------|
| Radiator model Example: Frame standard radiator | Radiator dimensions Example: mm 464x1822 | Article code of the connection Example: connection V09 | Model code Example: Frame Convivium G24 | Constant value |
| FRST | 464 18 | V09 | G24 | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a Frame CONVIVIUM standard 464x1822 mm, with V09 connection.

The article code will be:

FRST 464 18 V09 G24 B

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection ϕ 12/14/15
Art. Nr. 5991990310553

Multilayer connection ϕ 16 x2
Art. Nr. 5991990310552



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right

Copper connection ϕ 12/14/15
Art. Nr. 5991990310543

Multilayer connection ϕ 16 x2
Art. Nr. 5991990310542




Towel bar
POLISHED

L. 352 (L= 404 mm)
Art. Nr. 5991990300187

L. 464 (L= 516 mm)
Art. Nr. 5991990300183


L. 576 (L= 628 mm)
Art. Nr. 5991990300184

L. 688 (L= 740 mm)
Art. Nr. 5991990300188

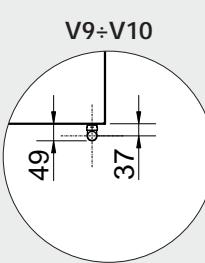


V9÷V10

Measures for Elegant square manual valve

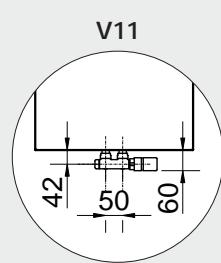

V11


Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

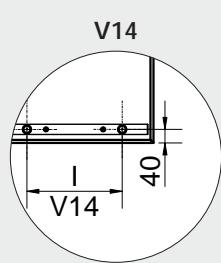

V14


Measurements for wall-fit thermostatic valve (see Pipe Centers V14 column)

Accessories and spare parts- see from page 366.

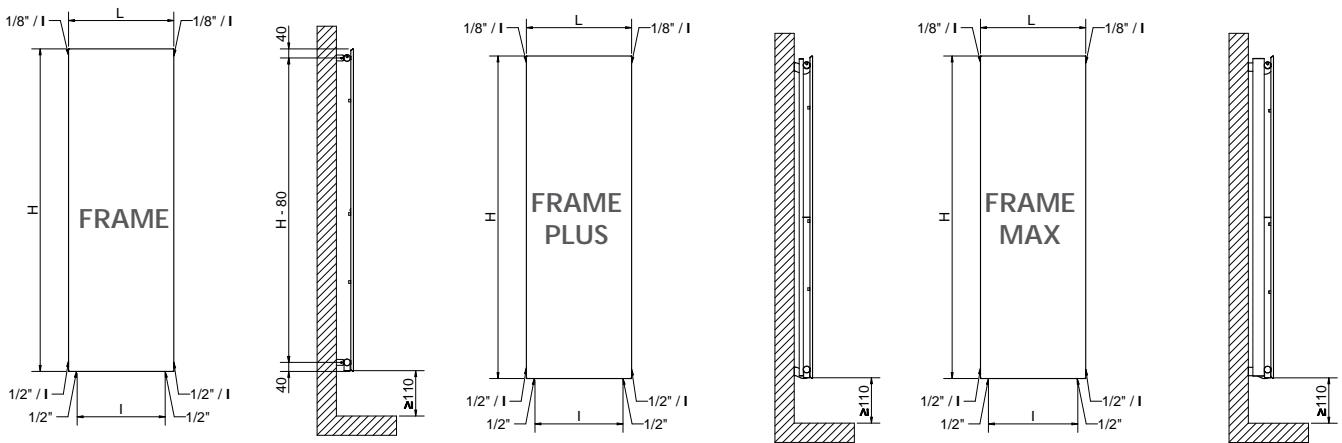**FRAME CONVIVIUM (G24)**

see sizing page 354-355

Standard connections

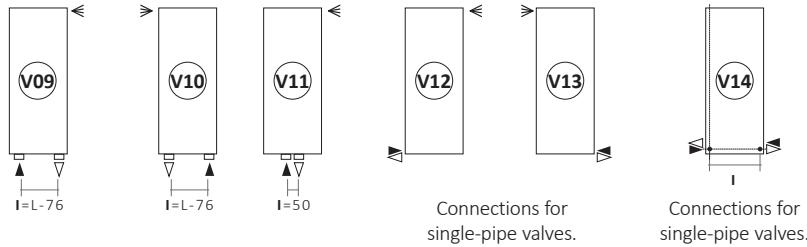

Always specify the type of connection needed when ordering (V09- V10- V11- V12- V13- V14).

Legend =

| | | | | | |
|--|--------------|--|-------|--|------------|
| | In | | Out | | Airvent |
| | Pipe Centres | | Width | | Connection |

FRAME PICTURE CONVIVIUM**DDD:** replace with the type of connection.

| Art. Nr. | Height | Width | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|-----------------------|-------------|--------|-------------------------|--------------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| FRST 464 18 DDD G24 B | 1822 | 464 | 388 | 280 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 |
| FRST 576 18 DDD G24 B | | 576 | 500 | 392 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 |
| FRST 464 20 DDD G24 B | 2022 | 464 | 388 | 280 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 |
| FRST 576 20 DDD G24 B | | 576 | 500 | 392 | 23 | 2,38 | 8 | 1222 | 635 | 1,2826 |

FRAME PICTURE PLUS CONVIVIUM**DDD:** replace with the type of connection.

| Art. Nr. | Height | Width | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|-----------------------|-------------|--------|-------------------------|--------------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| FRPL 464 18 DDD G24 B | 1822 | 464 | 388 | 280 | 35,7 | 3,24 | 11,2 | 1455 | 745 | 1,3105 |
| FRPL 576 18 DDD G24 B | | 576 | 500 | 392 | 45,1 | 4,10 | 13,7 | 1819 | 931 | 1,3105 |
| FRPL 464 20 DDD G24 B | 2022 | 464 | 388 | 280 | 39,5 | 3,59 | 12,3 | 1568 | 803 | 1,3093 |
| FRPL 576 20 DDD G24 B | | 576 | 500 | 392 | 49,9 | 4,54 | 15,0 | 1960 | 1004 | 1,3093 |

FRAME PICTURE MAX CONVIVIUM**DDD:** replace with the type of connection.

| Art. Nr. | Height | Width | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|-----------------------|-------------|--------|-------------------------|--------------------|------------|---------|---------------|---------------------|-----------|------------|
| | H [mm] | L [mm] | I [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | Δt = 30°C | |
| FRMX 464 18 DDD G24 B | 1822 | 464 | 394 | 280 | 52,4 | 5,288 | 16,7 | 1788 | 902 | 1,33810 |
| FRMX 576 18 DDD G24 B | | 576 | 506 | 392 | 65,4 | 6,61 | 20,8 | 2234 | 1128 | 1,33810 |
| FRMX 464 20 DDD G24 B | 2022 | 464 | 394 | 280 | 59,5 | 5,864 | 18,3 | 1955 | 998 | 1,31670 |
| FRMX 576 20 DDD G24 B | | 576 | 506 | 392 | 74,2 | 7,33 | 22,8 | 2443 | 1247 | 1,31670 |

Always specify while ordering the desired Artwork type.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n

FRAME PICTURE

CONVIVIUM

Applicable on models: • FRAME • FRAME PLUS • FRAME MAX

FRAME CONVIVIUM

G24

1822x464



1822x576



2022x464




2022x576



FRAME CONVIVIUM TRITTICO

G25

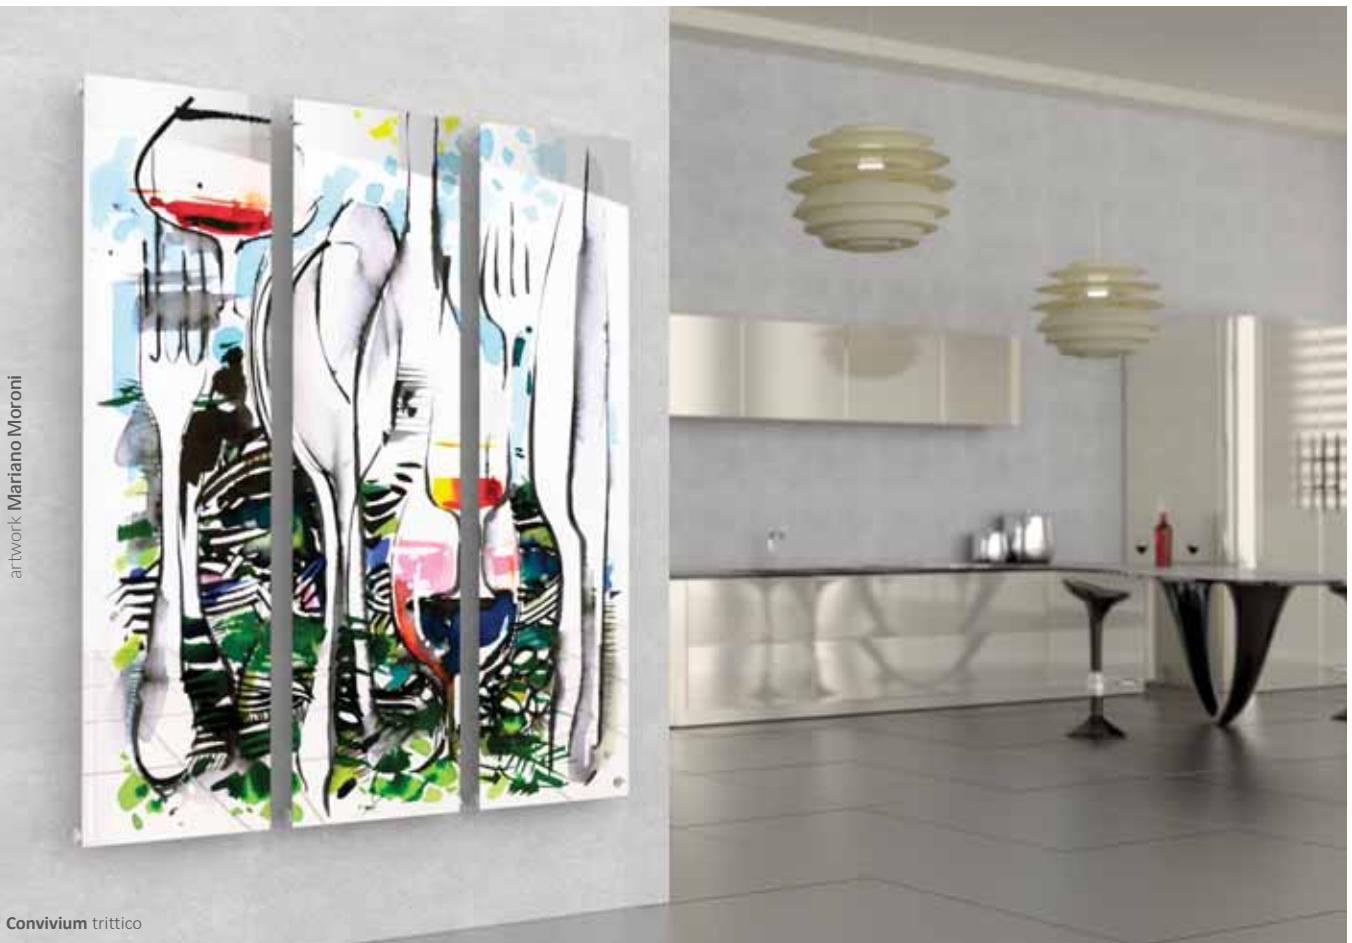

Convivium trittico

FRAME PICTURE


CONVIVIUM TRITTICO

Applicable on models: • FRAME • FRAME PLUS • FRAME MAX



The radiator CONVIVIUM TRITTICO is composed of three pieces.

FRAME CONVIVIUM TRITTICO G25

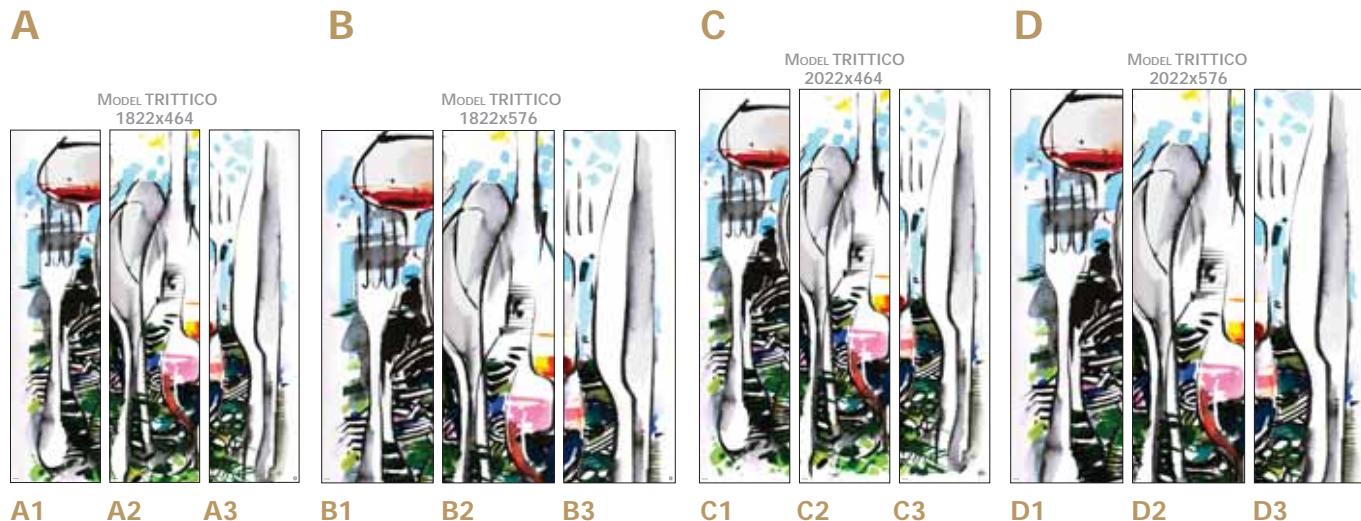

FRAME PICTURE CONVIVIUM TRITTICO

DDD: replace with the type of connection.

| Art. Nr. | Height | Width | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|-----------------------|-------------|--------|----------------------------|-----------------------|------------|---------|---------------|------------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| FRST 464 18 DDD G25 B | 1822 | 464 | 388 | 280 | 16,6 | 1,74 | 5,8 | 880 | 457 | 1,2840 |
| FRST 576 18 DDD G25 B | | 576 | 500 | 392 | 20,9 | 2,15 | 7,2 | 1100 | 571 | 1,2840 |
| FRST 464 20 DDD G25 B | 2022 | 464 | 388 | 280 | 18,4 | 1,93 | 6,4 | 978 | 508 | 1,2826 |
| FRST 576 20 DDD G25 B | | 576 | 500 | 392 | 23 | 2,38 | 8 | 1222 | 635 | 1,2826 |

(*) The technical information indicated refer to a single piece of the trittico.

FRAME PICTURE PLUS CONVIVIUM TRITTICO

DDD: replace with the type of connection.

| Art. Nr. | Height | Width | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|-----------------------|-------------|--------|----------------------------|-----------------------|------------|---------|---------------|------------------------|------------|--------|
| | H [mm] | L [mm] | I [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| FRPL 464 18 DDD G25 B | 1822 | 464 | 388 | 280 | 35,7 | 3,24 | 11,2 | 1455 | 745 | 1,3105 |
| FRPL 576 18 DDD G25 B | | 576 | 500 | 392 | 45,1 | 4,10 | 13,7 | 1819 | 931 | 1,3105 |
| FRPL 464 20 DDD G25 B | 2022 | 464 | 388 | 280 | 39,5 | 3,59 | 12,3 | 1568 | 803 | 1,3093 |
| FRPL 576 20 DDD G25 B | | 576 | 500 | 392 | 49,9 | 4,54 | 15,0 | 1960 | 1004 | 1,3093 |

(*) The technical information indicated refer to a single piece of the trittico.

FRAME PICTURE MAX CONVIVIUM TRITTICO

DDD: replace with the type of connection.

| Art. Nr. | Height | Width | Pipe Centres (V09- V10) | Pipe Centres (V14) | Dry Weight | Surface | Water Content | Thermal output Watt | Exponent n | |
|-----------------------|-------------|--------|----------------------------|-----------------------|------------|---------|---------------|------------------------|------------|---------|
| | H [mm] | L [mm] | I [mm] | I [mm] | [Kg] | [m²] | [lt] | Δt = 50°C | | |
| FRMX 464 18 DDD G25 B | 1822 | 464 | 374 | 280 | 52,4 | 5,288 | 16,7 | 1788 | 902 | 1,33810 |
| FRMX 576 18 DDD G25 B | | 576 | 506 | 392 | 65,4 | 6,61 | 20,8 | 2234 | 1128 | 1,33810 |
| FRMX 464 20 DDD G25 B | 2022 | 464 | 374 | 280 | 59,5 | 5,864 | 18,3 | 1955 | 998 | 1,31670 |
| FRMX 576 20 DDD G25 B | | 576 | 506 | 392 | 74,2 | 7,33 | 22,8 | 2443 | 1247 | 1,31670 |

(*) The technical information indicated refer to a single piece of the trittico.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



ROSY GRAPHIC

TOTEM - RING

artwork Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collectors in painted mild steel Ø 38 mm
Vertical heating elements in painted mild steel 50x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a wooden crate and carton.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C


Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

RING, TOTEM BLACK AND TOTEM WHITE ARE AVAILABLE IN **HORIZONTAL VERSION** ON REQUEST.

Vertical and horizontal dimensions and graphic have been chosen with care to offer a exclusive design radiators collection easy to place in every contemporaneous living space.
We always suggest to indicate the connections when you order.


Standard connections

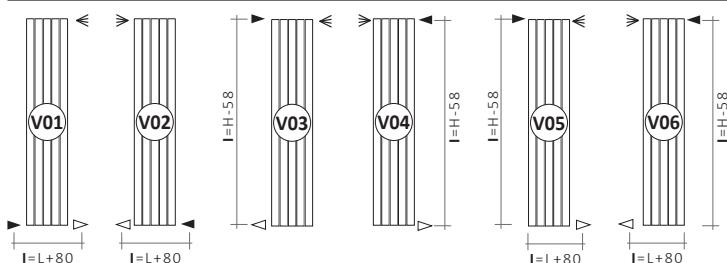

Legend = ▶ In ▷ Out ⚠ Airvent H Height I Pipe Centres

Always specify the kind of connection needed when ordering.

Special connections

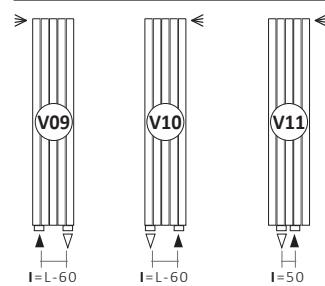

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538




Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right

Copper connection Ø 12/14/15
Art. Nr. 5991990310543



Multilayer connection Ø 16 x2
Art. Nr. 5991990310542

Accessories and spare parts - see from page 366.



TOTEM WHITE G01

Available measures

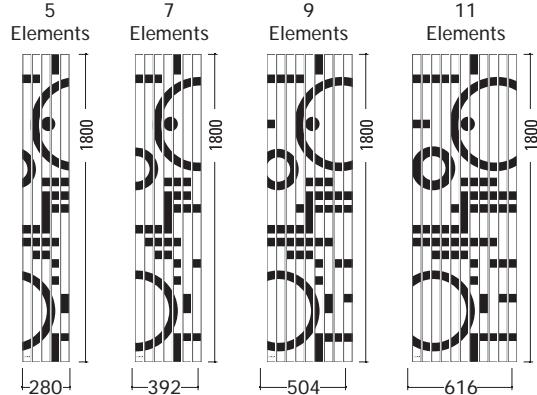
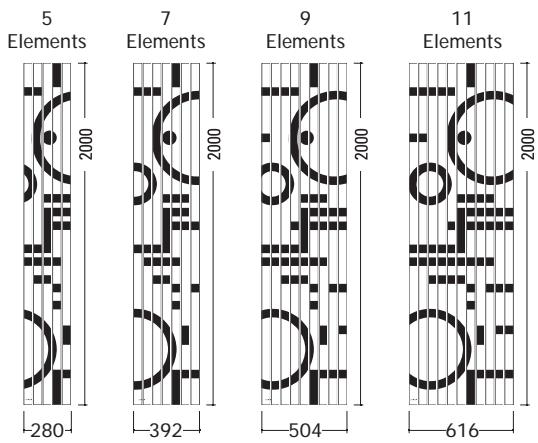


INOX STYLE




TOTEM BLACK G02

Available measures

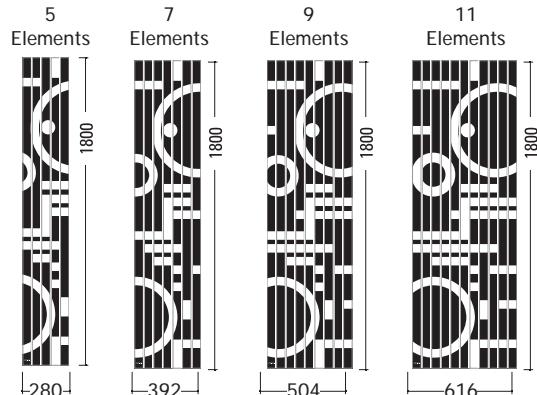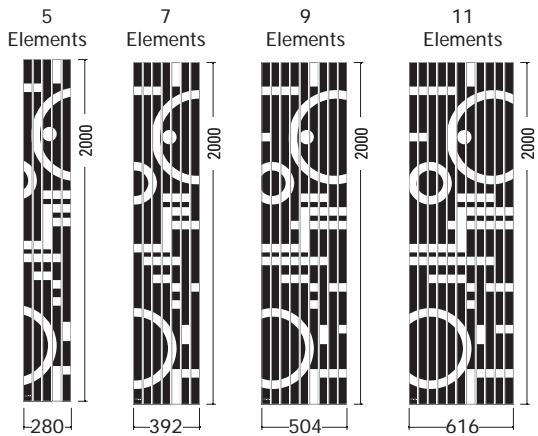


NEO DESIGN

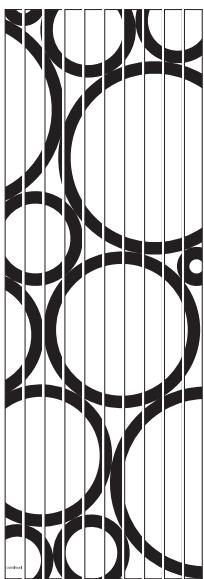

RING G04

Available measures

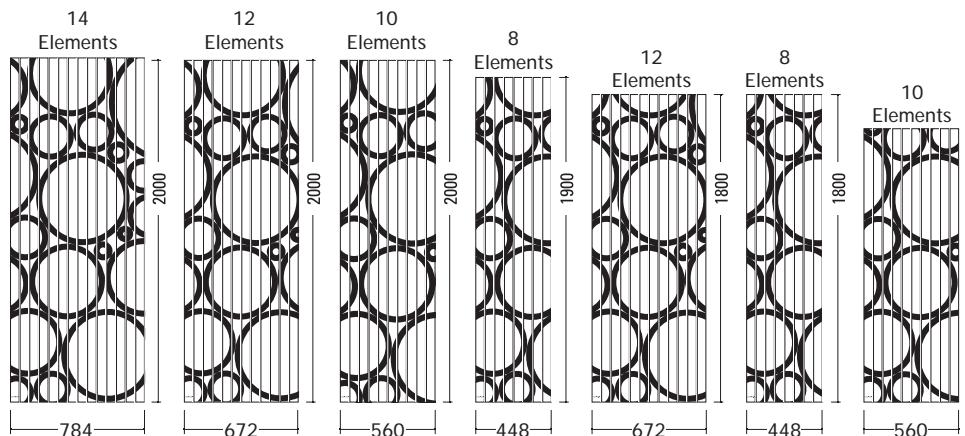

ACCESSIONS
TECHNICAL SUPPORT

EXTRASLIM®

CLASSIC LINE

GRAPHIC PICTURE

1 - ROSY GRAPHIC - HOW TO ORDER

| ARTICLE CODE STRUCTURE | | | | | | EXAMPLE OF ARTICLE CODE CREATION | | | | |
|------------------------|-----------------|--------------------|--------------------------------|------------|----------------|----------------------------------|--------------------------------|--------------------------------|------------|----------------|
| Radiator model | Number elements | Height of radiator | Article code of the connection | Model code | Constant value | Radiator model | Example | Article code of the connection | Model code | Constant value |
| AAAA | BB | CCC | DDD | EEE | B | RO50 | Example: Radiator Rosy Graphic | V11 | G01 | B |
| | | | | | | | Example: Width 5 Elements | | | |

2 - ROSY TANDEM GRAPHIC - HOW TO ORDER

| ARTICLE CODE STRUCTURE | | | | | | EXAMPLE OF ARTICLE CODE CREATION | | | | |
|------------------------|-----------------|--------------------|--------------------------------|------------|----------------|----------------------------------|---------------------------------------|--------------------------------|------------|----------------|
| Radiator model | Number elements | Height of radiator | Article code of the connection | Model code | Constant value | Radiator model | Example | Article code of the connection | Model code | Constant value |
| AAAA | BB | CCC | DDD | EEE | B | RT50 | Example: Radiator Rosy Tandem Graphic | V11 | G01 | B |
| | | | | | | | Example: Width 5 Elements | | | |

3 - ROSY MAX GRAPHIC - HOW TO ORDER

| ARTICLE CODE STRUCTURE | | | | | | EXAMPLE OF ARTICLE CODE CREATION | | | | |
|------------------------|-----------------|--------------------|--------------------------------|------------|----------------|----------------------------------|------------------------------------|--------------------------------|------------|----------------|
| Radiator model | Number elements | Height of radiator | Article code of the connection | Model code | Constant value | Radiator model | Example | Article code of the connection | Model code | Constant value |
| AAAA | BB | CCC | DDD | EEE | B | RX50 | Example: Radiator Rosy Max Graphic | V11 | G01 | B |
| | | | | | | | Example: Width 5 Elements | | | |

1 - ROSY GRAPHIC VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | N. Elements | Height H [mm] | Pipe Centres I [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|-----------------|----------------|------------------|------------------------|-----------------------|------------------------------|--------------------------|-------------------------------|-------------------------------|---------------|
| | | | | | | | | $\Delta t = 50^\circ\text{C}$ | $\Delta t = 30^\circ\text{C}$ | |
| RO50 05 180 DDD G01 B | 280 | 5 | | 1742 | 12,8 | 1,14 | 3,5 | 570 | 296 | 1,2840 |
| RO50 07 180 DDD G01 B | 392 | 7 | | 1742 | 18 | 1,6 | 4,9 | 798 | 414 | 1,2840 |
| RO50 09 180 DDD G01 B | 504 | 9 | | 1742 | 23,1 | 2,06 | 6,3 | 1026 | 532 | 1,2840 |
| RO50 11 180 DDD G01 B | 616 | 11 | | 1742 | 28,2 | 2,5 | 7,7 | 1254 | 651 | 1,2840 |
| RO50 05 200 DDD G01 B | 280 | 5 | | 1942 | 14,1 | 1,16 | 3,8 | 630 | 327 | 1,2826 |
| RO50 07 200 DDD G01 B | 392 | 7 | | 1942 | 19,8 | 1,77 | 5,3 | 882 | 458 | 1,2826 |
| RO50 09 200 DDD G01 B | 504 | 9 | | 1942 | 25,5 | 2,27 | 6,9 | 1134 | 589 | 1,2826 |
| RO50 11 200 DDD G01 B | 616 | 11 | | 1942 | 31,2 | 2,78 | 8,4 | 1386 | 720 | 1,2826 |
| RO50 05 180 DDD G02 B | 280 | 5 | | 1742 | 12,8 | 1,14 | 3,5 | 570 | 296 | 1,2840 |
| RO50 07 180 DDD G02 B | 392 | 7 | | 1742 | 18 | 1,6 | 4,9 | 798 | 414 | 1,2840 |
| RO50 09 180 DDD G02 B | 504 | 9 | | 1742 | 23,1 | 2,06 | 6,3 | 1026 | 532 | 1,2840 |
| RO50 11 180 DDD G02 B | 616 | 11 | | 1742 | 28,2 | 2,5 | 7,7 | 1254 | 651 | 1,2840 |
| RO50 05 200 DDD G02 B | 280 | 5 | | 1942 | 14,1 | 1,16 | 3,8 | 630 | 327 | 1,2826 |
| RO50 07 200 DDD G02 B | 392 | 7 | | 1942 | 19,8 | 1,77 | 5,3 | 882 | 458 | 1,2826 |
| RO50 09 200 DDD G02 B | 504 | 9 | | 1942 | 25,5 | 2,27 | 6,9 | 1134 | 589 | 1,2826 |
| RO50 11 200 DDD G02 B | 616 | 11 | | 1942 | 31,2 | 2,78 | 8,4 | 1386 | 720 | 1,2826 |
| RO50 08 180 DDD G04 B | 448 | 8 | 1800 | 1742 | 20,5 | 1,83 | 5,6 | 912 | 473 | 1,2840 |
| RO50 08 190 DDD G04 B | 448 | 8 | 1900 | 1842 | 21,6 | 1,93 | 5,8 | 960 | 498 | 1,2840 |
| RO50 10 160 DDD G04 B | 560 | 10 | 1600 | 1542 | 23 | 2,05 | 6,3 | 1020 | 529 | 1,2854 |
| RO50 10 200 DDD G04 B | 560 | 10 | 2000 | 1942 | 28,3 | 2,53 | 7,6 | 1260 | 654 | 1,2826 |
| RO50 12 180 DDD G04 B | 672 | 12 | 1800 | 1742 | 30,8 | 2,75 | 8,4 | 1368 | 710 | 1,2840 |
| RO50 12 200 DDD G04 B | 672 | 12 | 2000 | 1942 | 34 | 3,04 | 9,1 | 1512 | 785 | 1,2826 |
| RO50 14 200 DDD G04 B | 784 | 14 | | 1942 | 39,7 | 3,55 | 10,7 | 1764 | 916 | 1,2826 |

Art. Nr. are referred to standard connection (V1-V6). For special connection see page 356.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired $\Delta t/50^\circ\text{C}$)ⁿ

2 - ROSY TANDEM GRAPHIC VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | N. Elements | Height H [mm] | Pipe Centres I [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|-----------------|----------------|------------------|------------------------|-----------------------|------------------------------|--------------------------|------------------------|------------------|---------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| RT50 05 180 DDD G01 B | 280 | 5 | | 1742 | 25 | 2,23 | 6,4 | 825 | 416 | 1,3387 |
| RT50 07 180 DDD G01 B | 392 | 7 | | 1742 | 35 | 3,12 | 9 | 1155 | 583 | 1,3387 |
| RT50 09 180 DDD G01 B | 504 | 9 | 1800 | 1742 | 44,8 | 4,01 | 11,6 | 1485 | 749 | 1,3387 |
| RT50 11 180 DDD G01 B | 616 | 11 | | 1742 | 54,8 | 4,90 | 14,2 | 1815 | 916 | 1,3387 |
| RT50 05 200 DDD G01 B | 280 | 5 | | 1942 | 27,6 | 2,47 | 7,1 | 900 | 454 | 1,3381 |
| RT50 07 200 DDD G01 B | 392 | 7 | | 1942 | 38,6 | 3,45 | 9,9 | 1260 | 636 | 1,3381 |
| RT50 09 200 DDD G01 B | 504 | 9 | | 1942 | 49,7 | 4,44 | 12,8 | 1620 | 818 | 1,3381 |
| RT50 11 200 DDD G01 B | 616 | 11 | | 1942 | 60 | 5,42 | 15,6 | 1680 | 848 | 1,3381 |
| RT50 05 180 DDD G02 B | 280 | 5 | | 1742 | 25 | 2,23 | 6,4 | 825 | 416 | 1,3387 |
| RT50 07 180 DDD G02 B | 392 | 7 | 1800 | 1742 | 35 | 3,12 | 9 | 1155 | 583 | 1,3387 |
| RT50 09 180 DDD G02 B | 504 | 9 | | 1742 | 44,8 | 4,01 | 11,6 | 1485 | 749 | 1,3387 |
| RT50 11 180 DDD G02 B | 616 | 11 | | 1742 | 54,8 | 4,90 | 14,2 | 1815 | 916 | 1,3387 |
| RT50 05 200 DDD G02 B | 280 | 5 | | 1942 | 27,6 | 2,47 | 7,1 | 900 | 454 | 1,3381 |
| RT50 07 200 DDD G02 B | 392 | 7 | | 1942 | 38,6 | 3,45 | 9,9 | 1260 | 636 | 1,3381 |
| RT50 09 200 DDD G02 B | 504 | 9 | | 1942 | 49,7 | 4,44 | 12,8 | 1620 | 818 | 1,3381 |
| RT50 11 200 DDD G02 B | 616 | 11 | | 1942 | 60 | 5,42 | 15,6 | 1680 | 848 | 1,3381 |
| RT50 08 180 DDD G04 B | 448 | 8 | 1800 | 1742 | 40 | 3,56 | 10,3 | 1320 | 666 | 1,3387 |
| RT50 08 190 DDD G04 B | 448 | 8 | 1900 | 1842 | 42 | 3,75 | 10,9 | 1391 | 702 | 1,3380 |
| RT50 10 160 DDD G04 B | 560 | 10 | 1600 | 1542 | 46,9 | 3,97 | 11,6 | 1490 | 752 | 1,3393 |
| RT50 10 200 DDD G04 B | 560 | 10 | 2000 | 1942 | 55,2 | 4,93 | 14,2 | 1800 | 909 | 1,3381 |
| RT50 12 180 DDD G04 B | 672 | 12 | 1800 | 1742 | 59,8 | 5,34 | 15,5 | 1980 | 999 | 1,3387 |
| RT50 12 200 DDD G04 B | 672 | 12 | 2000 | 1942 | 66 | 5,92 | 17 | 2160 | 1090 | 1,3381 |
| RT50 14 200 DDD G04 B | 784 | 14 | | 1942 | 77 | 6,90 | 19,9 | 2520 | 1272 | 1,3381 |

Art. Nr. are referred to standard connection (V1-V6). For special connection see page 356.

3 - ROSY MAX GRAPHIC VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | N. Elements | Height H [mm] | Pipe Centres I [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|-----------------|----------------|------------------|------------------------|-----------------------|------------------------------|--------------------------|------------------------|------------------|---------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| RX50 05 180 DDD G01 B | 280 | 5 | | 1762 | 38,7 | 3,31 | 9,5 | 1368 | 685 | 1,3530 |
| RX50 07 180 DDD G01 B | 392 | 7 | | 1762 | 51,2 | 3,97 | 12,7 | 1824 | 914 | 1,3530 |
| RX50 09 180 DDD G01 B | 504 | 9 | 1800 | 1762 | 66,1 | 4,63 | 16,5 | 2371 | 1188 | 1,3530 |
| RX50 11 180 DDD G01 B | 616 | 11 | | 1762 | 78,6 | 5,29 | 19,7 | 2827 | 1416 | 1,3530 |
| RX50 05 200 DDD G01 B | 280 | 5 | | 1962 | 42,9 | 5,95 | 10,5 | 1512 | 758 | 1,3520 |
| RX50 07 200 DDD G01 B | 392 | 7 | | 1962 | 56,7 | 6,61 | 14,0 | 2016 | 1011 | 1,3520 |
| RX50 09 200 DDD G01 B | 504 | 9 | | 1962 | 73,2 | 7,28 | 18,2 | 2620 | 1313 | 1,3520 |
| RX50 11 200 DDD G01 B | 616 | 11 | | 1962 | 87,1 | 7,94 | 21,7 | 3124 | 1566 | 1,3520 |
| RX50 05 180 DDD G02 B | 280 | 5 | | 1762 | 38,7 | 8,60 | 9,5 | 1368 | 685 | 1,3530 |
| RX50 07 180 DDD G02 B | 392 | 7 | | 1762 | 51,2 | 9,26 | 12,7 | 1824 | 914 | 1,3530 |
| RX50 09 180 DDD G02 B | 504 | 9 | 1800 | 1762 | 66,1 | 3,67 | 16,5 | 2371 | 1188 | 1,3530 |
| RX50 11 180 DDD G02 B | 616 | 11 | | 1762 | 78,6 | 4,40 | 19,7 | 2827 | 1416 | 1,3530 |
| RX50 05 200 DDD G02 B | 280 | 5 | | 1962 | 42,9 | 5,13 | 10,5 | 1512 | 758 | 1,3520 |
| RX50 07 200 DDD G02 B | 392 | 7 | | 1962 | 56,7 | 5,87 | 14,0 | 2016 | 1011 | 1,3520 |
| RX50 09 200 DDD G02 B | 504 | 9 | 2000 | 1962 | 73,2 | 6,60 | 18,2 | 2620 | 1313 | 1,3520 |
| RX50 11 200 DDD G02 B | 616 | 11 | | 1962 | 87,1 | 7,33 | 21,7 | 3124 | 1566 | 1,3520 |
| RX50 08 180 DDD G04 B | 448 | 8 | 1800 | 1762 | 58,7 | 8,07 | 14,6 | 2097 | 1051 | 1,3530 |
| RX50 10 200 DDD G04 B | 560 | 10 | 2000 | 1962 | 78,8 | 8,80 | 19,7 | 2822 | 1415 | 1,3520 |
| RX50 12 180 DDD G04 B | 672 | 12 | 1800 | 1762 | 86,0 | 9,53 | 21,6 | 3100 | 1553 | 1,3530 |
| RX50 12 200 DDD G04 B | 672 | 12 | 2000 | 1962 | 95,3 | 10,30 | 23,8 | 3427 | 1718 | 1,3520 |
| RX50 14 200 DDD G04 B | 784 | 14 | | 1962 | 111,9 | 11,5 | 28,0 | 4032 | 2021 | 1,3520 |

Art. Nr. are referred to standard connection (V1-V6). For special connection see page 356.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ



ROSY GRAPHIC

URBAN

artwork Mariano Moroni



**5 YEARS
WARRANTY**

MATERIAL:

Horizontal collectors in painted mild steel Ø 38 mm
Vertical heating elements in painted mild steel 50x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

PACKAGING:

The radiator is protected by a wooden crate and carton.
Use and maintenance notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C


Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 G 1/8"

URBAN BLACK AND URBAN WHITE ARE AVAILABLE IN HORIZONTAL VERSION ON REQUEST.

Vertical and horizontal dimensions and graphic have been chosen with care, to offer an exclusive design radiator collection, easy to place in every contemporary living space.
We always suggest to indicate the connections when ordering.


Standard connections

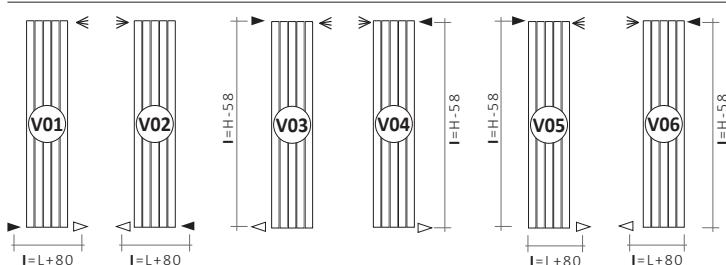

Legend = ▶ In ▷ Out ≈ Airvent H Height L Pipe Centres

Always specify the type of connection needed when ordering.

Special connections

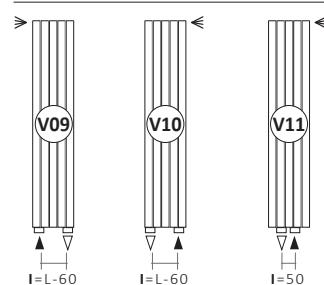

ACCESSORIES



Elegant square manual valve kit painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310553

Multilayer connection Ø 16 x2
Art. Nr. 5991990310552



Elegant square with thermostatic head valve kit, painted pure white R01

Copper connection Ø 12/14/15
Art. Nr. 5991990310539

Multilayer connection Ø 16 x2
Art. Nr. 5991990310538



Elegant square pipe centres 50 mm valve kit painted pure white R01 with thermostatic head - right



Copper connection Ø 12/14/15
Art. Nr. 5991990310543

Multilayer connection Ø 16 x2
Art. Nr. 5991990310542

Accessories and spare parts - see from page 366.




URBAN WHITE G05

Available measures

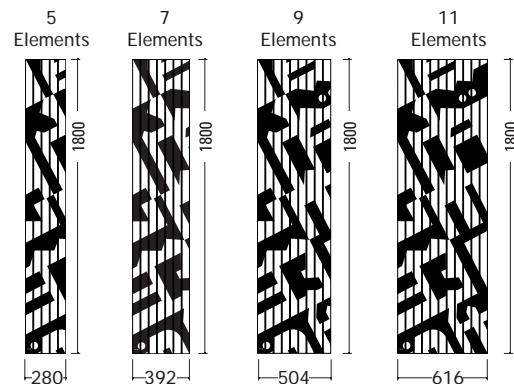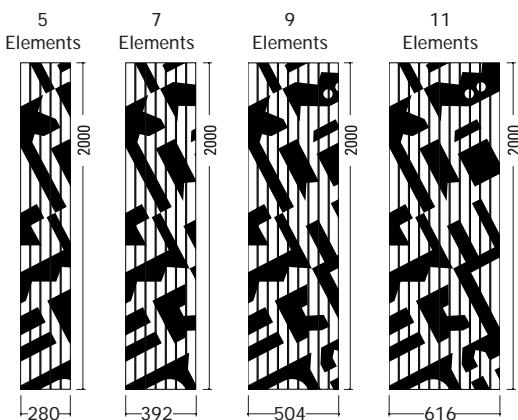

URBAN BLACK G06

Available measures

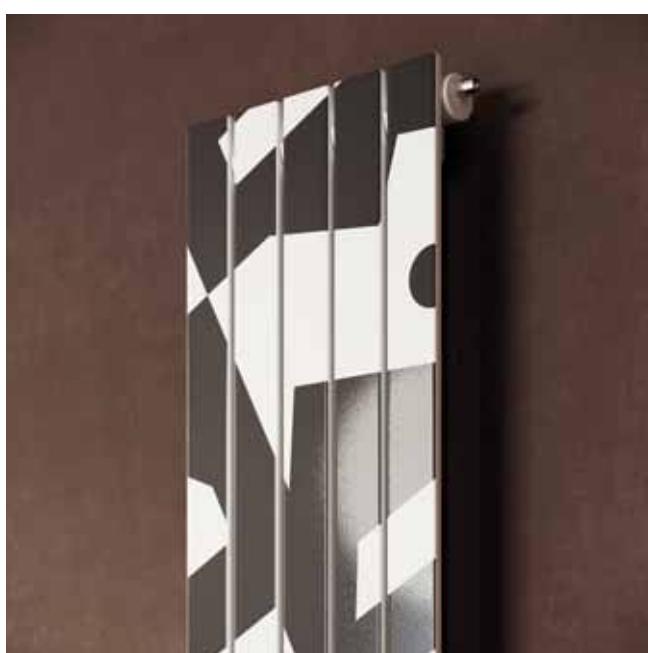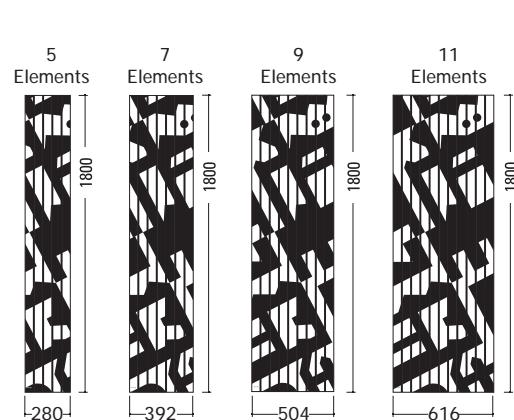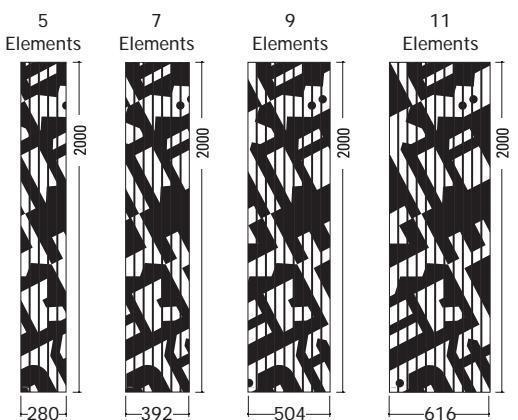

1 - ROSY GRAPHIC - HOW TO ORDER

ARTICLE CODE STRUCTURE

| Radiator model | Number elements | Height of radiator | Article code of the connection | Model code | Constant value |
|----------------|-----------------|--------------------|--------------------------------|------------|----------------|
| AAAA | BB | CCC | DDD | EEE | B |

Example

| | |
|--------------------------------|--------------------------------|
| Radiator model | Example: Radiator Rosy Graphic |
| Number elements | Example: Width 5 Elements |
| Height radiator | Example: 2000 mm |
| Article code of the connection | Example: V11 |
| Model code | Example: Urban White G05 |
| Constant value | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a ROSY GRAPHIC 5 Elements, H. 2000 mm, with V11 connection, model Urban White G05.

The article code will be:

RO50 05 200 V11 G05 B

2 - ROSY TANDEM GRAPHIC - HOW TO ORDER

ARTICLE CODE STRUCTURE

| Radiator model | Number elements | Height of radiator | Article code of the connection | Model code | Constant value |
|----------------|-----------------|--------------------|--------------------------------|------------|----------------|
| AAAA | BB | CCC | DDD | EEE | B |

Example

| | |
|--------------------------------|---------------------------------------|
| Radiator model | Example: Radiator Rosy Tandem Graphic |
| Number elements | Example: Width 5 Elements |
| Height radiator | Example: 2000 mm |
| Article code of the connection | Example: V11 |
| Model code | Example: Urban White G05 |
| Constant value | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a ROSY tandem GRAPHIC 5 Elements, H. 2000 mm, with V11 connection, model Urban White G05.

The article code will be:

RT50 05 200 V11 G05 B

3 - ROSY MAX GRAPHIC - HOW TO ORDER

ARTICLE CODE STRUCTURE

| Radiator model | Number elements | Height of radiator | Article code of the connection | Model code | Constant value |
|----------------|-----------------|--------------------|--------------------------------|------------|----------------|
| AAAA | BB | CCC | DDD | EEE | B |

Example

| | |
|--------------------------------|------------------------------------|
| Radiator model | Example: Radiator Rosy Max Graphic |
| Number elements | Example: Width 5 Elements |
| Height radiator | Example: 2000 mm |
| Article code of the connection | Example: V11 |
| Model code | Example: Urban White G05 |
| Constant value | B |

EXAMPLE OF ARTICLE CODE CREATION

In case of a ROSY max GRAPHIC 5 Elements, H. 2000 mm, with V11 connection, model Urban White G05.

The article code will be:

RX50 05 200 V11 G05 B

1- ROSY GRAPHIC VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | N. Elements | Height H [mm] | Pipe Centres I [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-------------------|-----------------------|----------------|------------------|------------------------|-----------------------|------------------------------|--------------------------|------------------------|-----------|---------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| URBAN WHITE - G05 | RO50 05 180 DDD G05 B | 5 | 1800 | 1742 | 12,8 | 1,14 | 3,5 | 570 | 296 | 1,2840 |
| | RO50 07 180 DDD G05 B | 7 | | 1742 | 18 | 1,6 | 4,9 | 798 | 414 | 1,2840 |
| | RO50 09 180 DDD G05 B | 9 | | 1742 | 23,1 | 2,06 | 6,3 | 1026 | 532 | 1,2840 |
| | RO50 11 180 DDD G05 B | 11 | | 1742 | 28,2 | 2,5 | 7,7 | 1254 | 651 | 1,2840 |
| | RO50 05 200 DDD G05 B | 5 | | 1942 | 14,1 | 1,16 | 3,8 | 630 | 327 | 1,2826 |
| | RO50 07 200 DDD G05 B | 7 | | 1942 | 19,8 | 1,77 | 5,3 | 882 | 458 | 1,2826 |
| | RO50 09 200 DDD G05 B | 9 | | 1942 | 25,5 | 2,27 | 6,9 | 1134 | 589 | 1,2826 |
| | RO50 11 200 DDD G05 B | 11 | | 1942 | 31,2 | 2,78 | 8,4 | 1386 | 720 | 1,2826 |
| URBAN BLACK - G06 | RO50 05 180 DDD G06 B | 5 | 1800 | 1742 | 12,8 | 1,14 | 3,5 | 570 | 296 | 1,2840 |
| | RO50 07 180 DDD G06 B | 7 | | 1742 | 18 | 1,6 | 4,9 | 798 | 414 | 1,2840 |
| | RO50 09 180 DDD G06 B | 9 | | 1742 | 23,1 | 2,06 | 6,3 | 1026 | 532 | 1,2840 |
| | RO50 11 180 DDD G06 B | 11 | | 1742 | 28,2 | 2,5 | 7,7 | 1254 | 651 | 1,2840 |
| | RO50 05 200 DDD G06 B | 5 | | 1942 | 14,1 | 1,16 | 3,8 | 630 | 327 | 1,2826 |
| | RO50 07 200 DDD G06 B | 7 | | 1942 | 19,8 | 1,77 | 5,3 | 882 | 458 | 1,2826 |
| | RO50 09 200 DDD G06 B | 9 | | 1942 | 25,5 | 2,27 | 6,9 | 1134 | 589 | 1,2826 |
| | RO50 11 200 DDD G06 B | 11 | | 1942 | 31,2 | 2,78 | 8,4 | 1386 | 720 | 1,2826 |

Art. Nr. are referred to standard connection (V1-V6). For special connection see page 344.

For output at different Δ than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n

2 - ROSY TANDEM GRAPHIC VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | N. Elements | Height H [mm] | Pipe Centres I [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|-----------------|----------------|------------------|------------------------|-----------------------|------------------------------|--------------------------|------------------------|-----------|---------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| RT50 05 180 DDD G05 B | 280 | 5 | | 1742 | 25 | 2,23 | 6,4 | 825 | 416 | 1,3387 |
| RT50 07 180 DDD G05 B | 392 | 7 | | 1742 | 35 | 3,12 | 9 | 1155 | 583 | 1,3387 |
| RT50 09 180 DDD G05 B | 504 | 9 | 1800 | 1742 | 44,8 | 4,01 | 11,6 | 1485 | 749 | 1,3387 |
| RT50 11 180 DDD G05 B | 616 | 11 | | 1742 | 54,8 | 4,90 | 14,2 | 1815 | 916 | 1,3387 |
| RT50 05 200 DDD G05 B | 280 | 5 | | 1942 | 27,6 | 2,47 | 7,1 | 900 | 454 | 1,3381 |
| RT50 07 200 DDD G05 B | 392 | 7 | | 1942 | 38,6 | 3,45 | 9,9 | 1260 | 636 | 1,3381 |
| RT50 09 200 DDD G05 B | 504 | 9 | | 1942 | 49,7 | 4,44 | 12,8 | 1620 | 818 | 1,3381 |
| RT50 11 200 DDD G05 B | 616 | 11 | | 1942 | 60 | 5,42 | 15,6 | 1680 | 848 | 1,3381 |
| RT50 05 180 DDD G06 B | 280 | 5 | | 1742 | 25 | 2,23 | 6,4 | 825 | 416 | 1,3387 |
| RT50 07 180 DDD G06 B | 392 | 7 | 1800 | 1742 | 35 | 3,12 | 9 | 1155 | 583 | 1,3387 |
| RT50 09 180 DDD G06 B | 504 | 9 | | 1742 | 44,8 | 4,01 | 11,6 | 1485 | 749 | 1,3387 |
| RT50 11 180 DDD G06 B | 616 | 11 | | 1742 | 54,8 | 4,90 | 14,2 | 1815 | 916 | 1,3387 |
| RT50 05 200 DDD G06 B | 280 | 5 | | 1942 | 27,6 | 2,47 | 7,1 | 900 | 454 | 1,3381 |
| RT50 07 200 DDD G06 B | 392 | 7 | | 1942 | 38,6 | 3,45 | 9,9 | 1260 | 636 | 1,3381 |
| RT50 09 200 DDD G06 B | 504 | 9 | 2000 | 1942 | 49,7 | 4,44 | 12,8 | 1620 | 818 | 1,3381 |
| RT50 11 200 DDD G06 B | 616 | 11 | | 1942 | 60 | 5,42 | 15,6 | 1680 | 848 | 1,3381 |

Art. Nr. are referred to standard connection (V1-V6). For special connection see page 344.

3 - ROSY MAX GRAPHIC VERTICAL

DDD: replace with the type of connection.

| Art. Nr. | Width L [mm] | N. Elements | Height H [mm] | Pipe Centres I [mm] | Dry Weight [Kg] | Surface [m ²] | Water Content [lt] | Thermal output Watt | | Exponent n |
|-----------------------|-----------------|----------------|------------------|------------------------|-----------------------|------------------------------|--------------------------|------------------------|-----------|---------------|
| | | | | | | | | Δt = 50°C | Δt = 30°C | |
| RX50 05 180 DDD G05 B | 280 | 5 | | 1762 | 38,7 | 3,31 | 9,5 | 1368 | 685 | 1,3530 |
| RX50 07 180 DDD G05 B | 392 | 7 | | 1762 | 51,2 | 3,97 | 12,7 | 1824 | 914 | 1,3530 |
| RX50 09 180 DDD G05 B | 504 | 9 | 1800 | 1762 | 66,1 | 4,63 | 16,5 | 2371 | 1188 | 1,3530 |
| RX50 11 180 DDD G05 B | 616 | 11 | | 1762 | 78,6 | 5,29 | 19,7 | 2827 | 1416 | 1,3530 |
| RX50 05 200 DDD G05 B | 280 | 5 | | 1962 | 42,9 | 5,95 | 10,5 | 1512 | 758 | 1,3520 |
| RX50 07 200 DDD G05 B | 392 | 7 | | 1962 | 56,7 | 6,61 | 14,0 | 2016 | 1011 | 1,3520 |
| RX50 09 200 DDD G05 B | 504 | 9 | 2000 | 1962 | 73,2 | 7,28 | 18,2 | 2620 | 1313 | 1,3520 |
| RX50 11 200 DDD G05 B | 616 | 11 | | 1962 | 87,1 | 7,94 | 21,7 | 3124 | 1566 | 1,3520 |
| RX50 05 180 DDD G06 B | 280 | 5 | | 1762 | 38,7 | 8,60 | 9,5 | 1368 | 685 | 1,3530 |
| RX50 07 180 DDD G06 B | 392 | 7 | 1800 | 1762 | 51,2 | 9,26 | 12,7 | 1824 | 914 | 1,3530 |
| RX50 09 180 DDD G06 B | 504 | 9 | | 1762 | 66,1 | 3,67 | 16,5 | 2371 | 1188 | 1,3530 |
| RX50 11 180 DDD G06 B | 616 | 11 | | 1762 | 78,6 | 4,40 | 19,7 | 2827 | 1416 | 1,3530 |
| RX50 05 200 DDD G06 B | 280 | 5 | | 1962 | 42,9 | 5,13 | 10,5 | 1512 | 758 | 1,3520 |
| RX50 07 200 DDD G06 B | 392 | 7 | | 1962 | 56,7 | 5,87 | 14,0 | 2016 | 1011 | 1,3520 |
| RX50 09 200 DDD G06 B | 504 | 9 | 2000 | 1962 | 73,2 | 6,60 | 18,2 | 2620 | 1313 | 1,3520 |
| RX50 11 200 DDD G06 B | 616 | 11 | | 1962 | 87,1 | 7,33 | 21,7 | 3124 | 1566 | 1,3520 |

Art. Nr. are referred to standard connection (V1-V6). For special connection see page 344.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

VALVES AND ACCESSORIES

CORDIVARI
DESIGN

TECHNICAL
SUPPORT


ACCESSORIES - STAINLESS STEEL RADIATORS

ELEGANT VALVES SATIN

Valve kit includes:

Valves and holder - thermostatic Head (not in manual version) - **Fittings for copper pipe (\varnothing 12/14/15) or multilayer pipe (\varnothing 16 x2).**

Available for: **LOLA - BABYLA - KELLY 38 - RIO[®] - STRADIVARI**

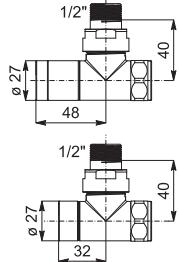


SQUARE - MANUAL

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320209

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320208

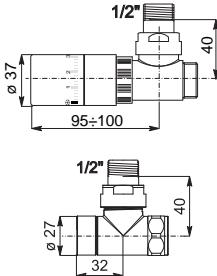


SQUARE - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320197

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320196

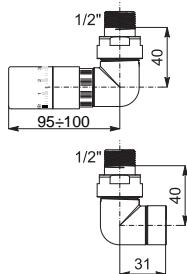

Not available on:
BABYLA - KELLY 38


CORNER (RIGHT) - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320204

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320202

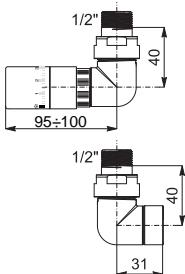


CORNER (LEFT) - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320205

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320203

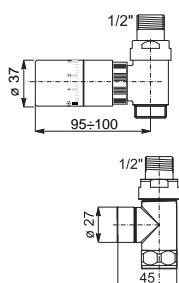


STRAIGHT - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320195

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320194

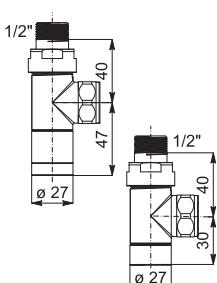

Only for:
LOLA

REVERSE - MANUAL

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320207

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320206

ACCESSORIES - STAINLESS STEEL RADIATORS

ELEGANT VALVES SATIN

Valve kit includes:

Valves and holder - thermostatic Head (not in manual version) - Fittings for copper pipe (\varnothing 12/14/15) or multilayer pipe (\varnothing 16 x2).

Available for: **BABYLA - KELLY 38**




**SQUARE WITH PIPE CENTRES 50 MM
AND THERMOSTATIC HEAD (RIGHT)**

Only for V7- V8- V11 connection type

Copper connection \varnothing 12/14/15

Art. Nr. 5991990320201

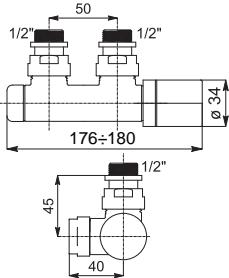


**STRAIGHT WITH PIPE CENTRES 50 MM
AND THERMOSTATIC HEAD**

Only for V7- V8- V11 connection type

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990320199

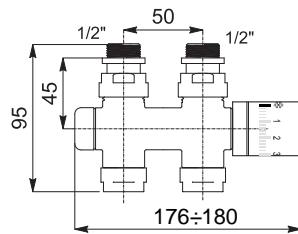

PIPE COVERING KIT



see page 378



**PIPE COVERING KIT FOR PIPE CENTRES
50 MM** see page 378



KIT ELITE BABYLA SATIN STAINLESS STEEL



**KIT ELITE
SATIN**
(only for Babyla H 1500)

N° 1 mirror

N° 1 shelf for books

Elegant square
satin valve kit pipe
centres 50 mm
with thermostatic
head (right)

N° 2 hanger clothes
satin stainless steel
 \varnothing 20 mm

N° 3 shelves
(2 on the left,
1 on the right)

N° 1 antenna for
hanging clothes

Art. Nr.
5102000000104

Art. Nr.
5991990000006

Art. Nr.
5991990010055

See above

Art. Nr.
5991990010007

Art. Nr.
5991990010021 - dx
5991990010022 - sx

Art. Nr.
5991990000005

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT


ACCESSORIES - STAINLESS STEEL RADIATORS

ELEGANT VALVES POLISHED

Valve kit includes:

Valves and holder - thermostatic Head (not in manual version) - **Fittings for copper pipe (\varnothing 12/14/15) or multilayer pipe (\varnothing 16 x2).**

Available for: **LOLA - FUJKO - BABYLA - KELLY 18 - KELLY 38 - RIO° - FRAME - FRAME PLUS**

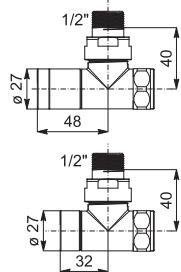


SQUARE - MANUAL

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301083

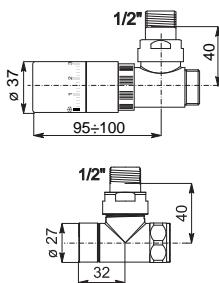


SQUARE - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301072

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301071

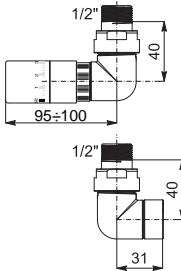

Not available on:
BABYLA - KELLY 18 - KELLY 38 - FRAME
AND SINGLE COLUMN RADIATOR WITH CONNECTION V11


CORNER (RIGHT) - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301079

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301077

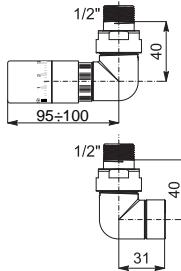


CORNER (LEFT) - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301080

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301078

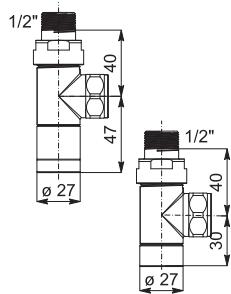


REVERSE - MANUAL

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301082

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301081

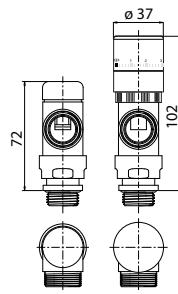

REVERSE WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301086

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301085



PIPE COVERING KIT
see page 378



PIPE COVERING KIT FOR PIPE CENTRES
50 MM see page 378



ACCESSORIES - STAINLESS STEEL RADIATORS

ELEGANT VALVES POLISHED

Valve kit includes:

Valves and holder - thermostatic Head (not in manual version) - **Fittings for copper pipe (\varnothing 12/14/15) or multilayer pipe (\varnothing 16 x2).**

Available for: **LOLA - FUJKO - BABYLA - KELLY 18 - KELLY 38 - RIO° - FRAME - FRAME PLUS**

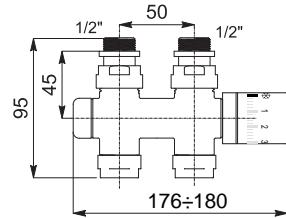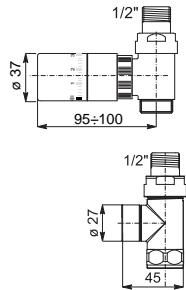

STRAIGHT - WITH THERMOSTATIC HEAD

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301070

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301069

Not available on:
LOLA • FUJKO • RIO

STRAIGHT WITH PIPE CENTRES 50 MM

AND THERMOSTATIC HEAD Only for V7- V8- V11 connection type



Copper connection \varnothing 12/14/15

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301074

Art. Nr. 5991990301073

Available for: **BABYLA - KELLY 18 - KELLY 38 - FRAME - FRAME PLUS**

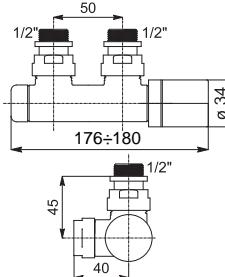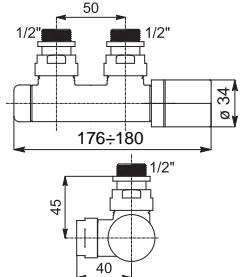

SQUARE WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD (RIGHT) - Only for V7- V8- V11 connection type

Copper connection \varnothing 12/14/15

Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301075

SQUARE WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD (LEFT) - Only for V7- V8- V11 connection type

Copper connection \varnothing 12/14/15


Multilayer connection \varnothing 16 x2

Art. Nr. 5991990301088

Art. Nr. 5991990301087

EUKONUS VALVE POLISHED

Available for: **LOLA - FUJKO - BABYLA - KELLY 18 - KELLY 38 - RIO° - FRAME - FRAME PLUS**



SQUARE - WITH THERMOSTATIC HEAD

3/4" EK Connections

Art. Nr. 5991990332876

PIPE ADAPTOR FOR EUKONUS

Copper connection \varnothing 12

Multilayer connection \varnothing 14 x2

Art. Nr. 5991990010229

Art. Nr. 5991990010232

Copper connection \varnothing 14

Multilayer connection \varnothing 16 x2

Art. Nr. 5991990010230

Art. Nr. 5991990010233

Copper connection \varnothing 15

Art. Nr. 5991990010231


ACCESSORIES - STAINLESS STEEL RADIATORS

ELEGANT VALVES GOLD

Valve kit includes:


Valves and holder - thermostatic Head (not in manual version) - **Fittings for copper pipe (\varnothing 12/14/15) or multilayer pipe (\varnothing 16 x2).**

Available for: **BABYLA**

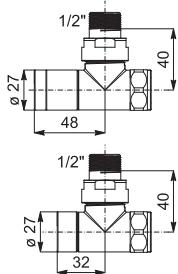

SQUARE - MANUAL

| | |
|--|---|
| Copper connection \varnothing 12/14/15 | Multilayer connection \varnothing 16 x2 |
| Art. Nr. 5991990301056 | Art. Nr. 5991990301055 |

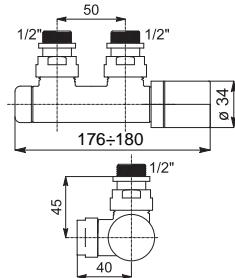

SQUARE WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD (RIGHT) - Only for V7- V8- V11 connection type

| | |
|--|---|
| Copper connection \varnothing 12/14/15 | Multilayer connection \varnothing 16 x2 |
| Art. Nr. 5991990301089 | Art. Nr. 5991990301091 |



PIPE COVERING KIT

see page 378




PIPE COVERING KIT FOR PIPE CENTRES

50 MM see page 378

ACCESSORIES - CLASSIC LINE RADIATORS


ELEGANT VALVES

Available for: **RETRÒ I - RETRÒ II - RETRÒ III**




SQUARE - MANUAL ANTIQUE GOLD

| | |
|---|--|
| Copper connection \varnothing 12/14/15/16 | Multilayer connection \varnothing 14x2 - \varnothing 16x2 - \varnothing 18x2 |
| Art. Nr. 5991990311132 | Art. Nr. 5991990311133 |



SQUARE - MANUAL CHROME


| | |
|---|--|
| Copper connection \varnothing 12/14/15/16 | Multilayer connection \varnothing 14x2 - \varnothing 16x2 - \varnothing 18x2 |
| Art. Nr. 5991990311134 | Art. Nr. 5991990311135 |



SQUARE - MANUAL ANTIQUE BRONZE

| | |
|---|--|
| Copper connection \varnothing 12/14/15/16 | Multilayer connection \varnothing 14x2 - \varnothing 16x2 - \varnothing 18x2 |
| Art. Nr. 5991990311130 | Art. Nr. 5991990311131 |

Available for: **RETRÒ I - RETRÒ II - RETRÒ III ELECTRIC**



PIPE COVERING KIT ANTIQUE GOLD

Art. Nr. 5103000000077

PIPE COVERING KIT CHROME

Art. Nr. 5103000000080


PIPE COVERING KIT ANTIQUE BRONZE

Art. Nr. 5103000000078

ACCESSORIES - STAINLESS STEEL AND PAINTED RADIATORS

BIDIRECTIONAL VALVES

Available for: **FRAME VERTICAL**

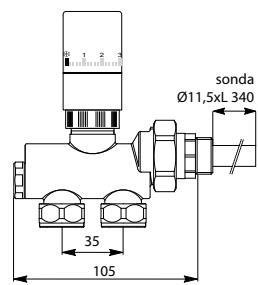


BIDIRECTIONAL VALVE WITH CHROMED THERMOSTATIC HEAD
for connection type V12- V13

Copper connection Ø 12/14/15

Art. Nr. 5991990300181

Multilayer connection Ø 16 x2

Art. Nr. 5991990300182

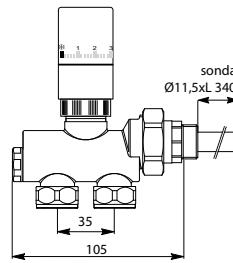

BIDIRECTIONAL VALVE WITH WHITE THERMOSTATIC HEAD
for connection type V12- V13

Copper connection Ø 12/14/15


Art. Nr. 5991990311080

Multilayer connection Ø 16 x2

Art. Nr. 5991990311081

WALL-FIT VALVES


Available for: **FRAME VERTICAL - FRAME HORIZONTAL - SFERE - SFERE TRITTICO**

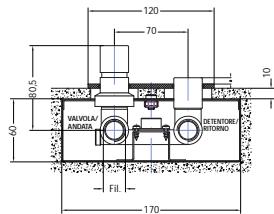

MANUAL WALL-FIT VALVE WITH THERMOSTATIC OPTION
for connection type V14- H08

1/2" Chrome

Art. Nr. 5991990311226

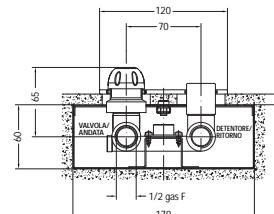

WALL-FIT VALVE WITH THERMOSTATIC HEAD
for connection type V14- H08

1/2" Chrome

Art. Nr. 5991990311227

FITTINGS FOR WALL-FIT VALVES

Copper connection Ø 12/14/15

Art. Nr. 5991170300001

Multilayer connection Ø 16 x2

Art. Nr. 5991170300002

For the wall-fit valve, three pairs of fittings are required, two for the body of the valve and one to be applied to the radiator.



The wall-fit valve can also be positioned far from the radiator; the important thing is that they are installed lower than the water inlet of the radiator.



FITTINGS FOR WALL-FIT VALVES

Copper connection Ø 12/14/15

Art. Nr. 5991170300001

Multilayer connection Ø 16 x2

Art. Nr. 5991170300002

For the wall-fit valve, three pairs of fittings are required, two for the body of the valve and one to be applied to the radiator.

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESORIES
TECHNICAL SUPPORT



ACCESSORIES PAINTED RADIATORS

ELEGANT VALVES KIT WHITE R01

Valve kit includes:

Valves and holder - thermostatic Head (not in manual version) - **Fittings for copper pipe ($\varnothing 12/14/15$) or multilayer pipe ($\varnothing 16 \times 2$)** - **Pair of cover rings for copper pipe ($\varnothing 12/14/15$) or multilayer pipe ($\varnothing 16 \times 2$)**.

Available for: **ALL PAINTED CARBON STEEL RADIATORS**

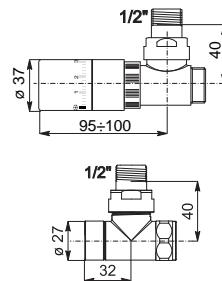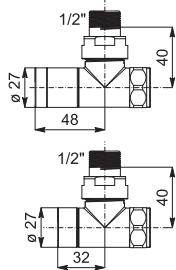

SQUARE - MANUAL

Copper connection $\varnothing 12/14/15$

Art. Nr. 5991990310553

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310552



SQUARE - WITH THERMOSTATIC HEAD

Copper connection $\varnothing 12/14/15$

Art. Nr. 5991990310539

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310538

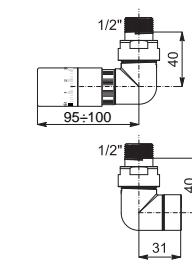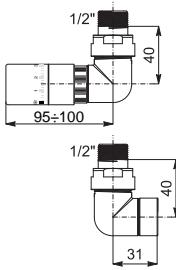

CORNER (RIGHT) - WITH THERMOSTATIC HEAD

Copper connection $\varnothing 12/14/15$

Art. Nr. 5991990310548

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310546

CORNER (LEFT) - WITH THERMOSTATIC HEAD

Copper connection $\varnothing 12/14/15$

Art. Nr. 5991990310549

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310547



PIPE COVERING KIT

see page 378



PIPE COVERING KIT FOR PIPE CENTRES 50 MM

see page 378

Valves with different colour from White R01 can be ordered together with radiator only and not separately.
Article nr. are referred to WHITE R01 colour version. Available also coloured version with surcharge of 30%. See page 388.


ACCESSORIES PAINTED RADIATORS

ELEGANT VALVES KIT WHITE R01

Valve kit includes:

Valves and holder - thermostatic Head (not in manual version) - **Fittings for copper pipe ($\varnothing 12/14/15$) or multilayer pipe ($\varnothing 16 \times 2$)** - **Pair of cover rings for copper pipe ($\varnothing 12/14/15$) or multilayer pipe ($\varnothing 16 \times 2$)**.

Available for: **ALL PAINTED CARBON STEEL RADIATORS**

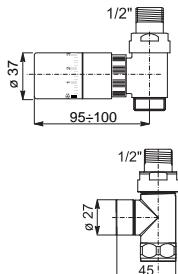

STRAIGHT - WITH THERMOSTATIC HEAD


Copper connection $\varnothing 12/14/15$

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310541

Art. Nr. 5991990310540

Available for: **FRAME I. 50 - FRAME PLUS I. 50 - ROSY GRAPHIC I. 50 - ROSY GRAPHIC TANDEM I. 50 - ROSY GRAPHIC MAX I. 50 - GROOVE[®] - ROADS[®] - ANDREA - JACKY - YARA - DEBBY**



SQUARE WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD


Only for V7- V8- V11 connection type

Copper connection $\varnothing 12/14/15$

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310543

Art. Nr. 5991990310542

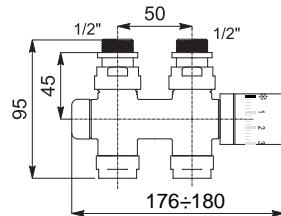

STRAIGHT WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD

Only for V7- V8- V11 connection type

Copper connection $\varnothing 12/14/15$


Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990310545

Art. Nr. 5991990310544

EUROKONUS VALVE KIT WHITE R01

Available for: **ALL PAINTED CARBON STEEL RADIATORS**



SQUARE - WITH THERMOSTATIC HEAD

3/4" EK Connection

Art. Nr. 5991990332875

PIPE ADAPTOR FOR EUROKONUS

Copper connection $\varnothing 12$

Multilayer connection $\varnothing 14 \times 2$

Art. Nr. 5991990010229

Art. Nr. 5991990010232

Copper connection $\varnothing 14$

Multilayer connection $\varnothing 16 \times 2$

Art. Nr. 5991990010230

Art. Nr. 5991990010233

Copper connection $\varnothing 15$

Art. Nr. 5991990010231

Valves with different colour from White R01 can be ordered together with radiator only and not separately.

Article nr. are referred to WHITE R01 colour version. Available also coloured version with surcharge of 30%. See page 388.

TINTA™ VALVES



SQUARE TINTA
VALVE KIT



CORNER TINTA VALVE KIT WITH
THERMOSTATIC HEAD LEFT



CORNER TINTA VALVE KIT WITH
THERMOSTATIC HEAD RIGHT



SQUARE TINTA VALVE KIT PIPE
CENTERS 50 MM WITH THERMOSTATIC
HEAD LEFT



SQUARE TINTA VALVE KIT PIPE
CENTERS 50 MM WITH THERMOSTATIC
HEAD RIGHT

Details make the difference.

Tinta valves are the natural completion of your design radiator.

Minimalist style and captivating design, discretion of shapes, compactness and perfect integration with the colour of the radiator.

From the valve group with thermostatic head to the integrated pipe cover ... with Tinta valves nothing is left to chance.

Because perfection is not a detail!


ACCESSORIES PAINTED RADIATORS

TINTA™ VALVES KIT

THE NEW TINTA VALVE KIT INCLUDE:

THERMOSTATIC HEAD, FITTINGS AND PIPE COVERING KIT IN THE SAME COLOR.

Available for: **ALL PAINTED CARBON STEEL RADIATORS**

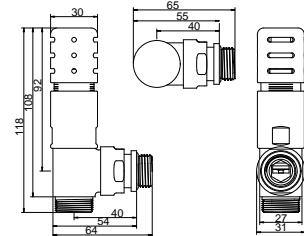

SQUARE


Copper connection Ø 12/14/15

Art. Nr. 5991990311236

Multilayer connection Ø 16 x2

Art. Nr. 5991990311237


TINTA VALVES DESIRED ROOM TEMPERATURE SETTING

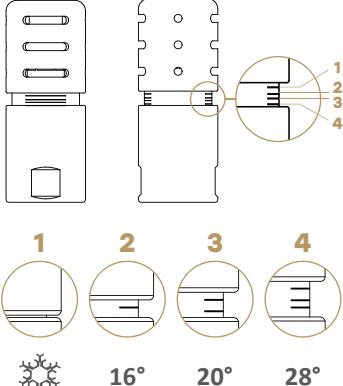

TINTA VALVES WITH COORDINATED PIPE COVER



Art. Nr. refer to standard white R01 colour, the pictures show the tinta valve set in fully coloured version. Surcharge of 30% for different colours then white R01.

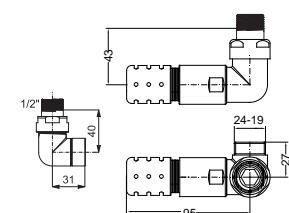


CORNER (RIGHT) - WITH THERMOSTATIC HEAD

Copper connection Ø 12/14/15

Art. Nr. 5991990311238

Multilayer connection Ø 16 x2

Art. Nr. 5991990311239

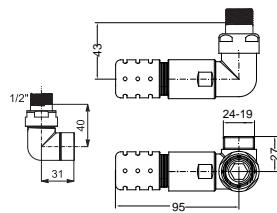

CORNER (LEFT) - WITH THERMOSTATIC HEAD

Copper connection Ø 12/14/15


Art. Nr. 5991990311240

Multilayer connection Ø 16 x2

Art. Nr. 5991990311241

Art. Nr. refer to standard white R01 colour, the pictures show the tinta valve set in fully coloured version. Surcharge of 30% for different colours then white R01.


Available for: **FRAME I. 50 - FRAME PLUS I. 50 - FRAME MAX I. 50 - ROSY GRAPHIC I. 50 - ROSY GRAPHIC TANDEM I. 50 - ROSY GRAPHIC MAX I. 50 - GROOVE® - ROADS® - ANDREA - JACKY - YARA - DEBBY**

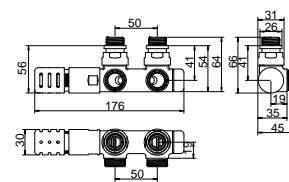

SQUARE WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD
(RIGHT) - Only for V7- V8- V11 connection type

Copper connection Ø 12/14/15

Art. Nr. 5991990311243

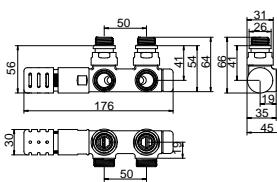

SQUARE WITH PIPE CENTRES 50 MM AND THERMOSTATIC HEAD
(LEFT) - Only for V7- V8- V11 connection type

Copper connection Ø 12/14/15

Art. Nr. 5991990311245

Multilayer connection Ø 16 x2

Art. Nr. 5991990311244

Art. Nr. refer to standard white R01 colour, the pictures show the tinta valve set in fully coloured version. Surcharge of 30% for different colours then white R01.

INOX STYLE

EXTRASLIM

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

ACCESSORIES

HOOKS SATIN STAINLESS STEEL - POLISHED STAINLESS STEEL



KIT 2 HOOKS Ø 20 MM
SATIN STAINLESS STEEL

Available for:
LOLA - BABYLA

Art. Nr. 5991990010224



KIT 2 HOOKS Ø 20 MM
POLISHED STAINLESS STEEL

Available for:
LOLA - LOLA DECOR
BABYLA - FUJKO

Art. Nr. 5991990010223

TOWEL BARS

STRADIVARI



TOWEL BAR SATIN STAINLESS
STEEL (L= 420 MM)

Art. Nr. 5991990010159

BADGE®



TOWEL BAR POLISHED STAIN-
LESS STEEL (L= 570 MM)

Available for:
BADGE® VT

Art. Nr. 5991990310240



ACCESSORIES

TOWEL BAR FOR FRAME

FRAME - FRAME PLUS - FRAME MAX - FRAME ELECTRIC - FRAME BLOWER



**TOWEL BAR
POLISHED FOR MODELS
FRAME - FRAME PLUS -
FRAME MAX**

L. 352 (L= 404 mm)
Art. Nr. 5991990300187

L. 464 (L= 516 mm)
Art. Nr. 5991990300183

L. 576 (L= 628 mm)
Art. Nr. 5991990300184

L. 688 (L= 740 mm)
Art. Nr. 5991990300188

**TOWEL BAR
POLISHED FOR MODELS
FRAME ELECTRIC - FRAME
BLOWER**

L. 502 (L= 560 mm)
Art. Nr. 5991990300191

L. 552 (L= 610 mm)
Art. Nr. 5991990300192



**KIT 3 TOWEL BARS
POLISHED FOR MODELS
FRAME - FRAME PLUS -
FRAME MAX**

L. 352 (L= 404 mm)
Art. Nr. 5991990300189

L. 464 (L= 516 mm)
Art. Nr. 5991990300185

L. 576 (L= 628 mm)
Art. Nr. 5991990300186

L. 688 (L= 740 mm)
Art. Nr. 5991990300190

**KIT 3 TOWEL BARS
POLISHED FOR MODELS
FRAME ELECTRIC - FRAME
BLOWER**

L. 502 (L= 560 mm)
Art. Nr. 5991990300193

L. 552 (L= 610 mm)
Art. Nr. 5991990300194



**TOWEL BAR
PAINTED FOR MODELS
FRAME - FRAME PLUS -
FRAME MAX**

L. 352 (L= 404 mm)
Art. Nr. 5991990310565

L. 464 (L= 516 mm)
Art. Nr. 5991990310566

L. 576 (L= 628 mm)
Art. Nr. 5991990310567

L. 688 (L= 740 mm)
Art. Nr. 5991990310568

**TOWEL BAR PAINTED
FOR MODELS FRAME
ELECTRIC - FRAME
BLOWER**

L. 502 (L= 560 mm)
Art. Nr. 5991990310664

L. 552 (L= 610 mm)
Art. Nr. 5991990310665



**KIT 3 TOWEL BARS
PAINTED FOR MODELS
FRAME - FRAME PLUS -
FRAME MAX**

L. 352 (L= 404 mm)
Art. Nr. 5991990310569

L. 464 (L= 516 mm)
Art. Nr. 5991990310570

L. 576 (L= 628 mm)
Art. Nr. 5991990310571

L. 688 (L= 740 mm)
Art. Nr. 5991990310572

**KIT 3 TOWEL BARS
PAINTED FOR MODELS
FRAME ELECTRIC - FRAME
BLOWER**

L. 502 (L= 560 mm)
Art. Nr. 5991990310666

L. 552 (L= 610 mm)
Art. Nr. 5991990310667

Article nr. and prices are referred to WHITE R01 colour version. Available also coloured version with surcharge of 30%. See page 388.



INOX STYLE

EXTRASLIM®

NEO DESIGN


CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

ACCESSORIES

PIPE COVERING KIT

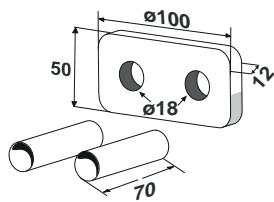


PIPE COVERING KIT FOR PIPE CENTRES 50 MM

SATIN VALVES

Art. Nr. 5103000000058

Pipe dimension: ϕ 18x70 mm. Covering dimension: 122x72 mm.

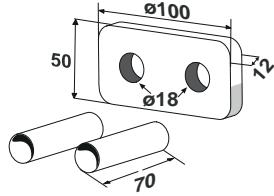


PIPE COVERING KIT FOR PIPE CENTRES 50 MM

CAN BE ORDERED FOR WHITE ELEGANT VALVES

Art. Nr. 5103000000090

CAN BE ORDERED FOR COLOURED ELEGANT VALVES


Pipe dimension: ϕ 18x70 mm. Covering dimension: 122x72 mm.

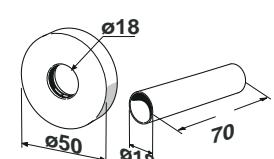

PIPE COVERING KIT

SATIN VALVES


Art. Nr. 5103000000045

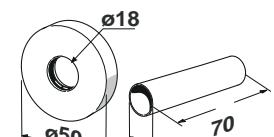

PIPE COVERING KIT

ANTIQUE GOLD VALVES

Art. Nr. 5103000000108

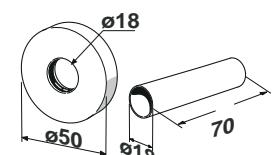


PIPE COVERING KIT - CAN BE ORDERED ONLY WITH THE VALVE

CAN BE ORDERED FOR WHITE ELEGANT VALVES

Art. Nr. 5103000000089

CAN BE ORDERED FOR COLOURED ELEGANT VALVES

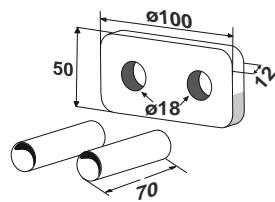


PIPE COVERING KIT FOR PIPE CENTRES 50 MM

POLISHED VALVES

Art. Nr. 5103000000057

Pipe dimension: ϕ 18x70 mm. Covering dimension: 122x72 mm.

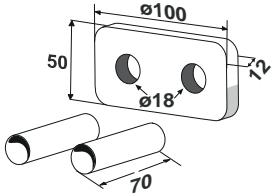


PIPE COVERING KIT FOR PIPE CENTRES 50 MM

GOLD POLISHED VALVES

Art. Nr. 5103000000087


Pipe dimension: ϕ 18x70 mm. Covering dimension: 122x72 mm.

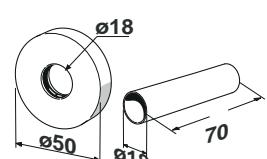

PIPE COVERING KIT

POLISHED VALVES

Art. Nr. 5103000000044

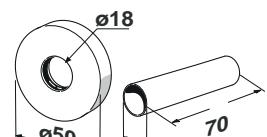

PIPE COVERING KIT

ANTIQUE BRONZE VALVES

Art. Nr. 5103000000109



ACCESSORY

Multilayer fitting ϕ 18 x 2

Multilayer fitting ϕ 20 x 2

SATIN VALVES

Art. Nr. 5006170320002

Art. Nr. 5006170320001

POLISHED VALVES

Art. Nr. 5006170050058

Art. Nr. 5006170050051

ACCESSORIES

SPARE PARTS - FIXING KIT

STAINLESS STEEL RADIATORS

Kit includes: Brackets, airvent, blind plug, hexagonal tool, plugs and screws for mounting, installation instructions.



SATIN

| | |
|----------------------------------|----------------------|
| Available for: | Art. Nr. |
| LOLA - LOLA DECOR OR - VT | 5102000000511 |
| BABYLA | 5102000000423 |

POLISHED

| | |
|----------------------------------|----------------------|
| Available for: | Art. Nr. |
| LOLA - LOLA DECOR OR - VT | 5102000000510 |
| FUJYKO | |
| BABYLA | 5102000000412 |
| KELLY | 5102000000414 |

PAINTED CARBON STEEL RADIATORS

Art. Nr. are referred to white R01 colour- RAL 9010 version. Available also coloured version with surcharge- See page 388.



| | |
|----------------|----------------------|
| Available for: | Art. Nr. |
| FRAME | 5102000000663 |



| | |
|-------------------------------|----------------------|
| Available for: | Art. Nr. |
| ROSY GRAPHIC VT | 5102000000512 |
| ROSY GRAPHIC TANDEM VT | 5102000000514 |
| ROSY PICTURE VT | 5102000000512 |
| FRAME PLUS | 5102000000513 |

THERMOSTATIC HEADS



Liquid thermostatic head - SATIN




Liquid thermostatic head - POLISHED



Liquid thermostatic head - GOLD



Liquid thermostatic head - WHITE

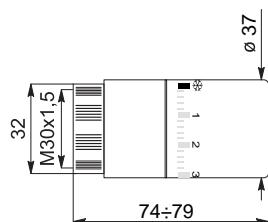

Art. Nr. 5035270710004



Art. Nr. 5035270710002

Art. Nr. 5035270710021

Art. Nr. 5035270710003


ELEGANT VALVES PRESSURE DROP

The different coloured lines indicate different opening levels of the thermostatic head.

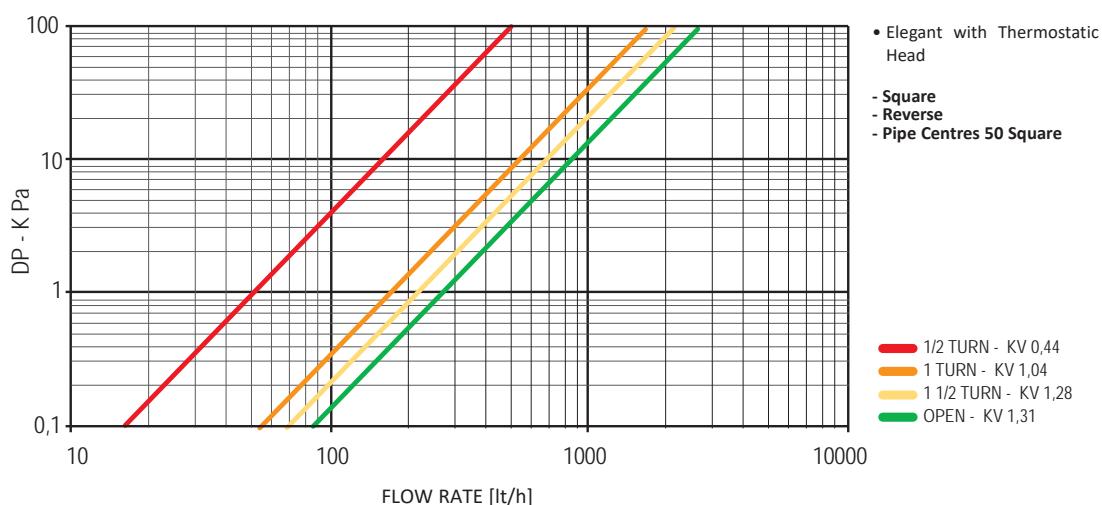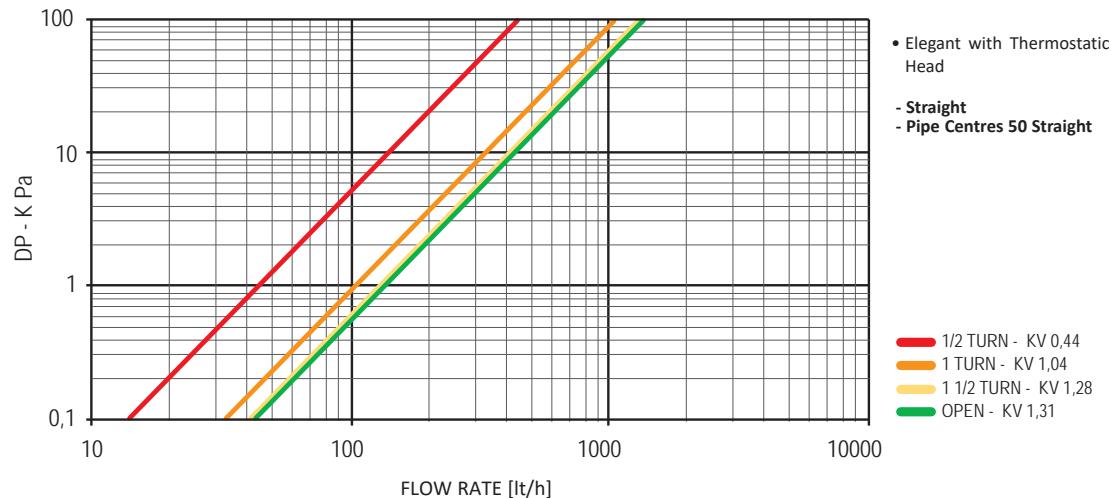


ELEGANT VALVES PRESSURE DROP

The different coloured lines indicate different opening levels of the thermostatic head.

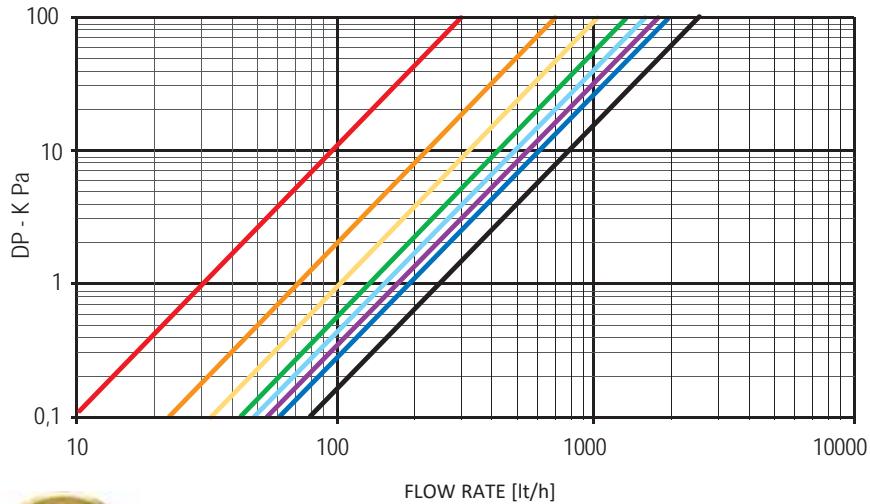

Cordinvari valves with thermostatic option allow pre-regulation of the flow rate for correct system balancing.

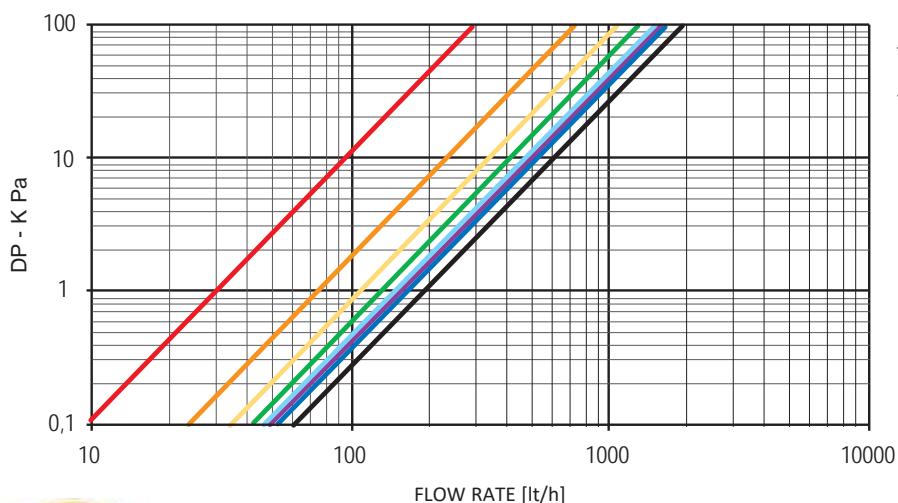

Cordinvari valves with thermostatic option allow pre-regulation of the flow rate for correct system balancing.

INOX STYLE

EXTRASLIM®

NEO DESIGN


CLASSIC LINE

GRAPHIC PICTURE


ACCESSORIES
TECHNICAL SUPPORT

TINTA VALVES PRESSURE DROP

The different coloured lines indicate different opening levels of the thermostatic head.

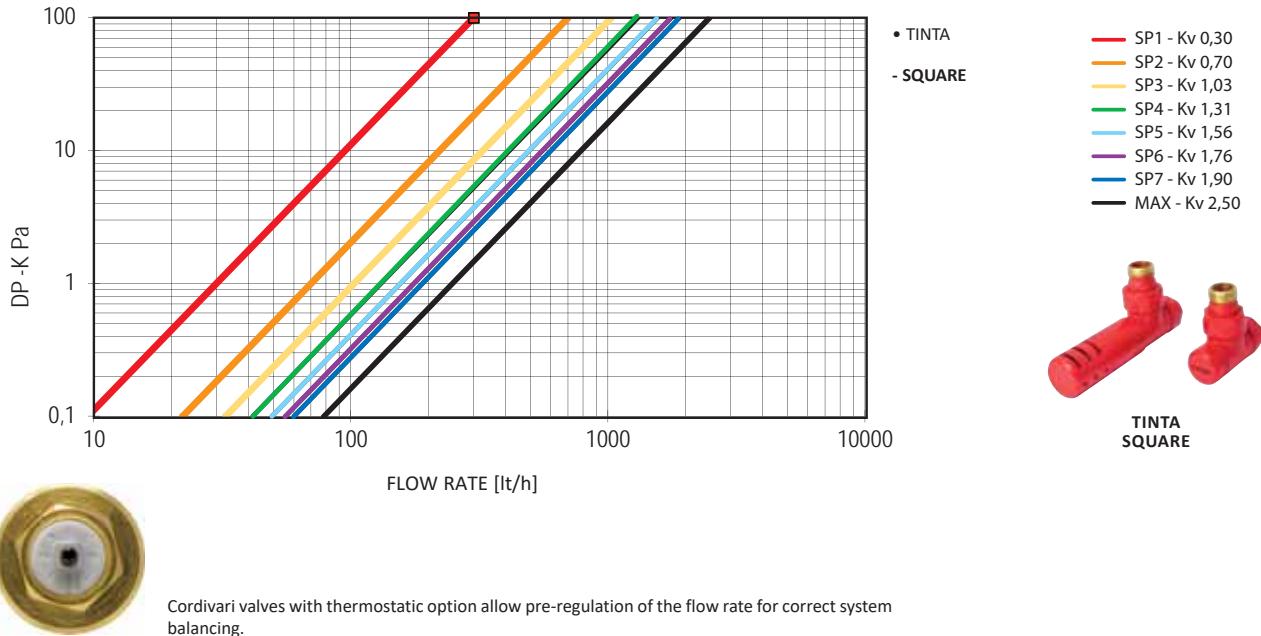

Cordivari valves with thermostatic option allow pre-regulation of the flow rate for correct system balancing.

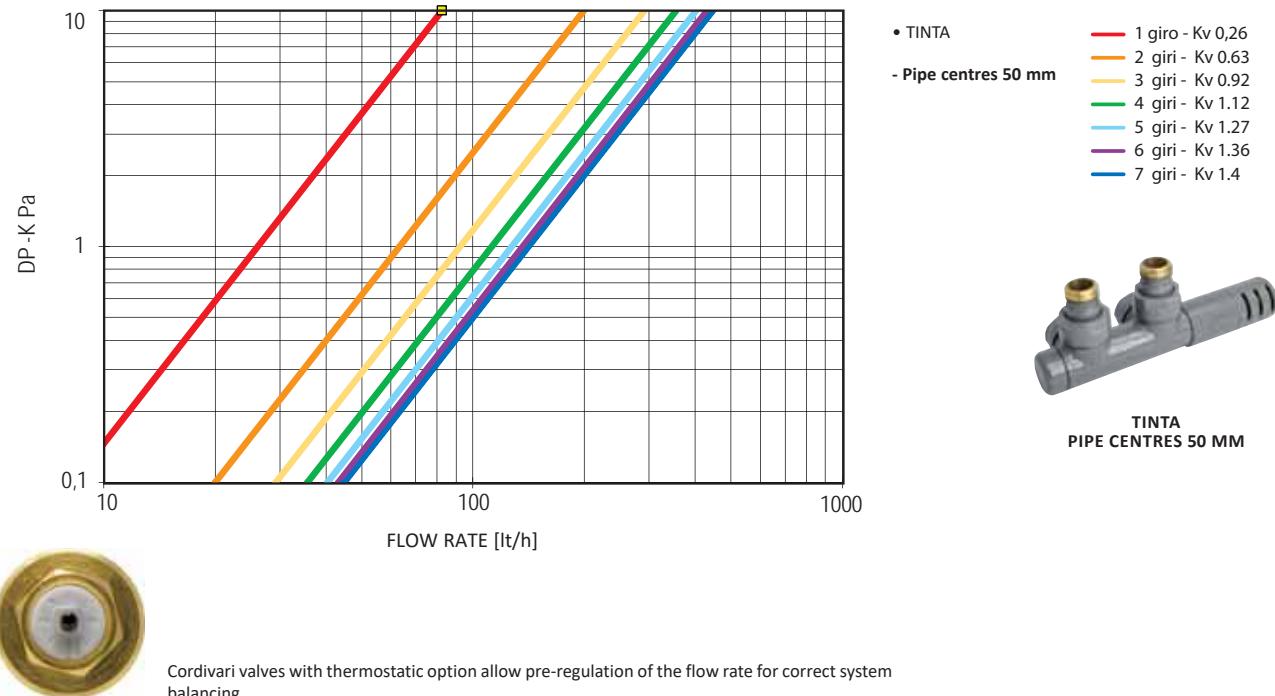


Cordivari valves with thermostatic option allow pre-regulation of the flow rate for correct system balancing.

PRESSURE DROP OF THE CORDIVARI RADIATORS


Below is the diagram relating to the pressure drop of the indicated models of Cordivari Design.

The graph shows that the pressure drops of the heating elements are not significant compared to these of general installation.

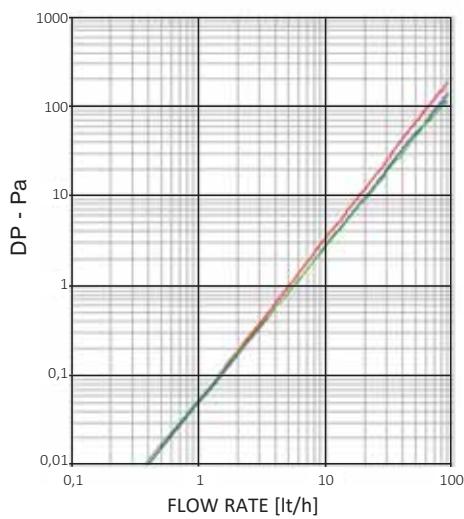


BABYLA

- 1100 X 600
- 1500 X 600
- 1800 X 600

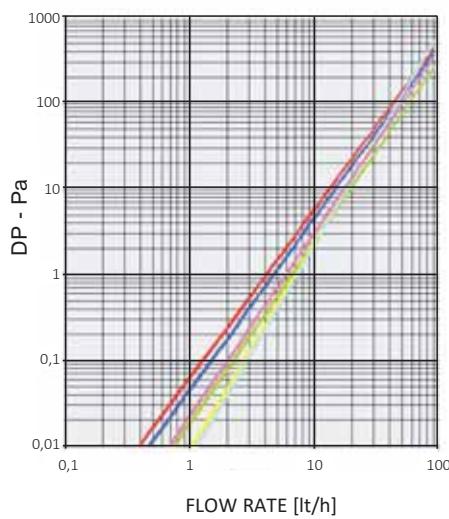

KELLY 18

- 500 X 1400
- 500 X 1770
- 600 X 1220
- 600 X 1400
- 600 X 1770
- 1200 X 514

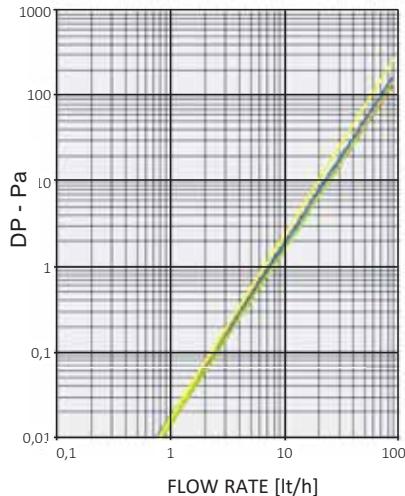


LOLA POLISHED

- 1516 X 570
- 570 X 1516


LOLA SATIN

- 1516 X 570
- 570 X 1516

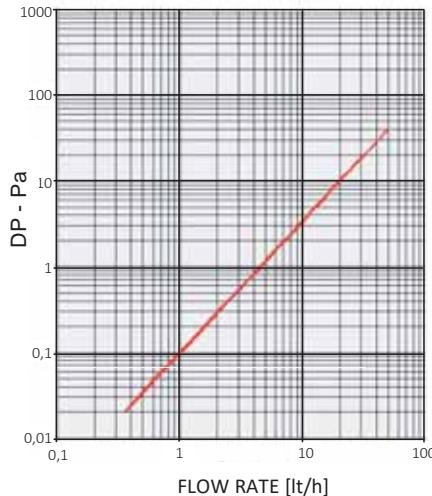


HAND

- 1200 X 514

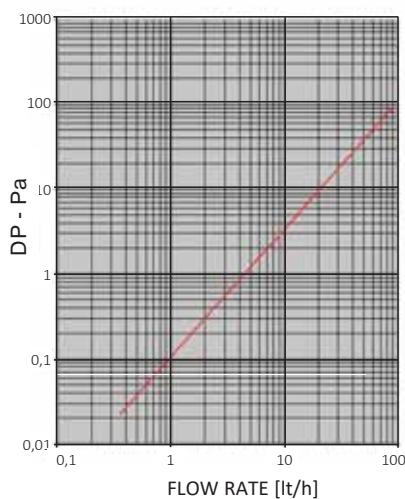

MOVIE

- 1200 X 514

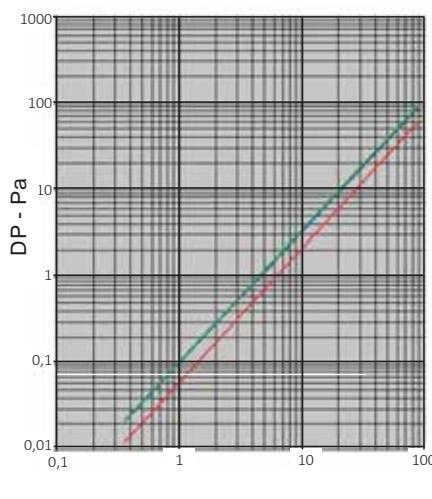

BADGE®

- 1755 X 512
- 1212 X 512
- 400 X 1604

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE


GRAPHIC PICTURE

ACCESSIONS
TECHNICAL SUPPORT

TECHNICAL FORMULAS FOR PROFESSIONALS

THERMAL OUTPUT

The power of a radiator to exchange heat in the room where it is installed depends on many factors: shape, size, installation type....and so on and from a pure technical point of view, from the difference between its temperature and the air temperature around it. It is known in physics that heat is transmitted spontaneously from a hot body to a cold body and this heat transmission is as big as the difference in temperature between the two bodies. In order to have comparable data between radiators thermal output, it is necessary to establish the difference in temperature between the radiator and the environment in which it has been fitted. On this regard, EN 442 European directive refers to the temperature difference between the average hot water temperature inside the radiator and the room temperature where the radiator is fitted.

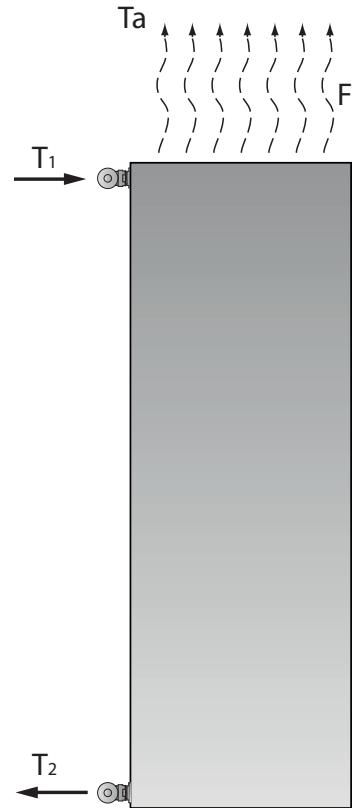

T₁ = delivery temperature

$$T_2 = \text{back flow temperature} \quad \Delta T = \left(\frac{T_1 + T_2}{2} \right) - T_a$$


T_a = room temperature

For example:

$$T_1 = 75^\circ\text{C} \quad \Delta T = \left(\frac{75 + 65}{2} \right) - 20 = 50^\circ\text{C}$$

$$T_2 = 65^\circ\text{C}$$

T_a = 20°C



ΔT is established at 50°C and the radiator thermal output has to be determined by authorised laboratories according standard procedures, defined by the European directive. As a consequence:

$$\Phi = K_M * \Delta T^n \quad [\text{W}]$$

That it is called "Heating Body Typical Equation". Such equation allows to calculate the radiator thermal output according to whatever ΔT. In such cases, the radiator thermal output at a different ΔT than 50°C, is calculated as follows:

$$\Phi_{\Delta T} = K_M * \Delta T^n \quad \Phi_{50} = \frac{\Phi_{50}}{50^n} * \Delta T^n$$

To be precise, the directive states that it is necessary to refer to the arithmetic temperature difference (ΔT above established) if as it happens in most cases the relation:

$$\mu = \frac{T_2 - T_a}{T_1 - T_a}$$

It is bigger or equal to 0.7. If the radiator is functioning with low water temperature or big temperature drops, the relations μ is lower than 0.7. In this case, it is necessary to change to the above stated relation the "temperature arithmetic difference" with the "temperature logarithmic difference", defined below:

$$\Delta T = \left[\frac{T_1 - T_2}{\ln \frac{T_1 - T_a}{T_2 - T_a}} \right]$$

FORMULAS

Example

If the nominal thermal output of one radiator stated in the catalogue is:

$$\Phi = 430[W] = 369,8[KCal/h]$$

and typical equation defined as:

$$\Phi = 3,2967 * \Delta T^{1,2451}$$

and if we assume to make the radiator functioning at $\Delta T=60\text{ C}^\circ$ we obtain:

$$\Phi = 3,2967 * 60^{1,2451} = 539,6[W] \Rightarrow 539,6 * 0,860 = 464[KCal/h]$$

It is possible to state then, that going from $\Delta T=50$ to $\Delta T=60$ the radiator thermal output rise of 25,5%..
If we think to make functioning the same radiator according to the below conditions:

$$T_1 = 55\text{ }^\circ\text{C} \quad T_2 = 35\text{ }^\circ\text{C} \quad T_a = 20\text{ }^\circ\text{C}$$

$$\mu = \frac{35-20}{55-20} = 0,429 < 0,7 \quad \text{et} \quad \Delta T = \left(\frac{T_1 - T_2}{\ln \frac{T_1 - T_a}{T_2 - T_a}} \right) = \left(\frac{55-35}{\ln \frac{55-20}{35-20}} \right) = 23,6\text{ }^\circ\text{C}$$

Applying the above procedure, the thermal output $\Delta T 23,6\text{ }^\circ\text{C}$ it is equal to:

$$\Phi = 3,2967 * 23,6^{1,2451} = 168,8[W] \Rightarrow 168,8 * 0,860 = 142,2[KCal/h]$$

We remind that in order to have the thermal output expressed in Kcal/h, it is necessary to multiply the value in Watts x 0.860.

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

EXPLORE THE CORDIVARI DESIGN WORLD
follow us on www.cordivaridesign.com



- Digital catalog
- Technical data sheets and images
- BIM objects
- News and Events

WEB



RAISING®

design Mariano Moroni




OPEN ART/OFFICE

Promoted by "A.M.A.C.I." the association of all Italian contemporary Museums.

Raising®, a free standing model that releases the radiator from the traditional position on the wall, which combines the function of the radiator with the one of a floor lighting.

FOGLIA®

design Paola Pinnavaia

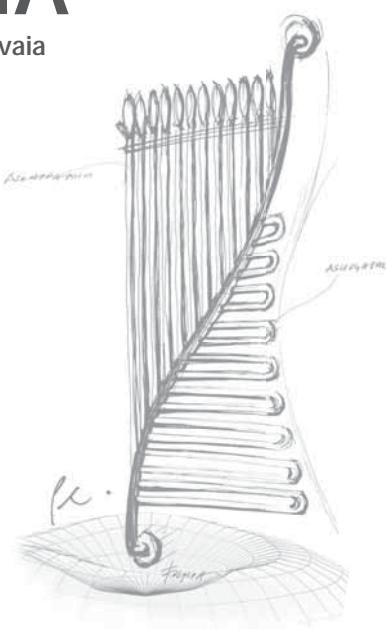

DESIGN DISTINCTION

Award 2001

I.D. Review, New York

Foglia® conceived in 1999 as first design heating element, where the sinuous shape meets the stainless steel's strength.





BRIDGE®

design Mariano Moroni



INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

RENÉE

design Mariano Moroni




"Comfortable, warming and protective shapes enhance every reflected image. The two groups of satin stainless steel heating elements seems to compete for the light while embracing a central mirror."

M. Moroni




HERITAGE COLLECTION

STANDARD




RAL 9010 - R01
BIANCO
PURE WHITE




RAL 9016 - R02
BIANCO TRAFFICO
TRAFFIC WHITE

CLASSIC



RAL 9001 - R14
CREMA
CREAM




S20
JASMINE




S03
PERGAMON



S16
CANARY




RAL 1013 - R40
PEARL WHITE




S10
ANEMONE



S21
PALE YELLOW




RAL 1021 - R05
GIALLO ACCESO
YELLOW RAPE



RAL 1004 - R06
GIALLO ORO
GOLD




H04
GHIACCIO
ICE



H09
LAGO
LAKE




RAL 5015 - R11
BLU CIELO
BLUE SKY




RAL 5017 - R18
BIANCO
OVERSEAS BLUE




RAL 5022 - R19
BIANCO
OVERSEAS BLUE




RAL 9005 - R13
NERO
JET BLACK




H24
MANGO



H25
MANDARINO
TANGERINE




RAL 2004 - R16
ARANCIO
PURE ORANGE




H27
ROSSO VIVO
BRIGHT RED




RAL 3003 - R08
ROSSO RUBINO
RUBY RED




RAL 4008 - R25
VIOLA
PURPLE




H53
LILLA ACCESO
BRIGHT LILAC



S13
ROSA SUTURATO
LIGHT PINK




RAL 6019 - R26
WEISSGRÜN
LIGHT GREEN



H30
MELA VERDE
GREEN APPLE




RAL 6002 - R20
VERDE FOGLIA
GREEN LEAF



RAL 8017 - R09
TESTA DI MORO
DARK BROWN



S17
BAHAMA BEIGE



H48
TORTORA
DOVE



H56
PIETRA LAVICA
LAVIC STONE



S07
GRAFITE
GRAPHITE



RAL 7030 - R22
GRIGIO PIETRA
STONE GREY



S02
MANHATTAN



RAL 7001 - R21
GRIGIO ARGENTO
SILVER GREY



R27
GRIGIO METALLIZZATO
METAL GREY



F41
AMBER GOLD

COLOURS

SURCHARGE

CLASSIC
MATT
TEXTURE
SPECIAL FINISHING

+30%


MATT



TEXTURE



SPECIAL FINISHING

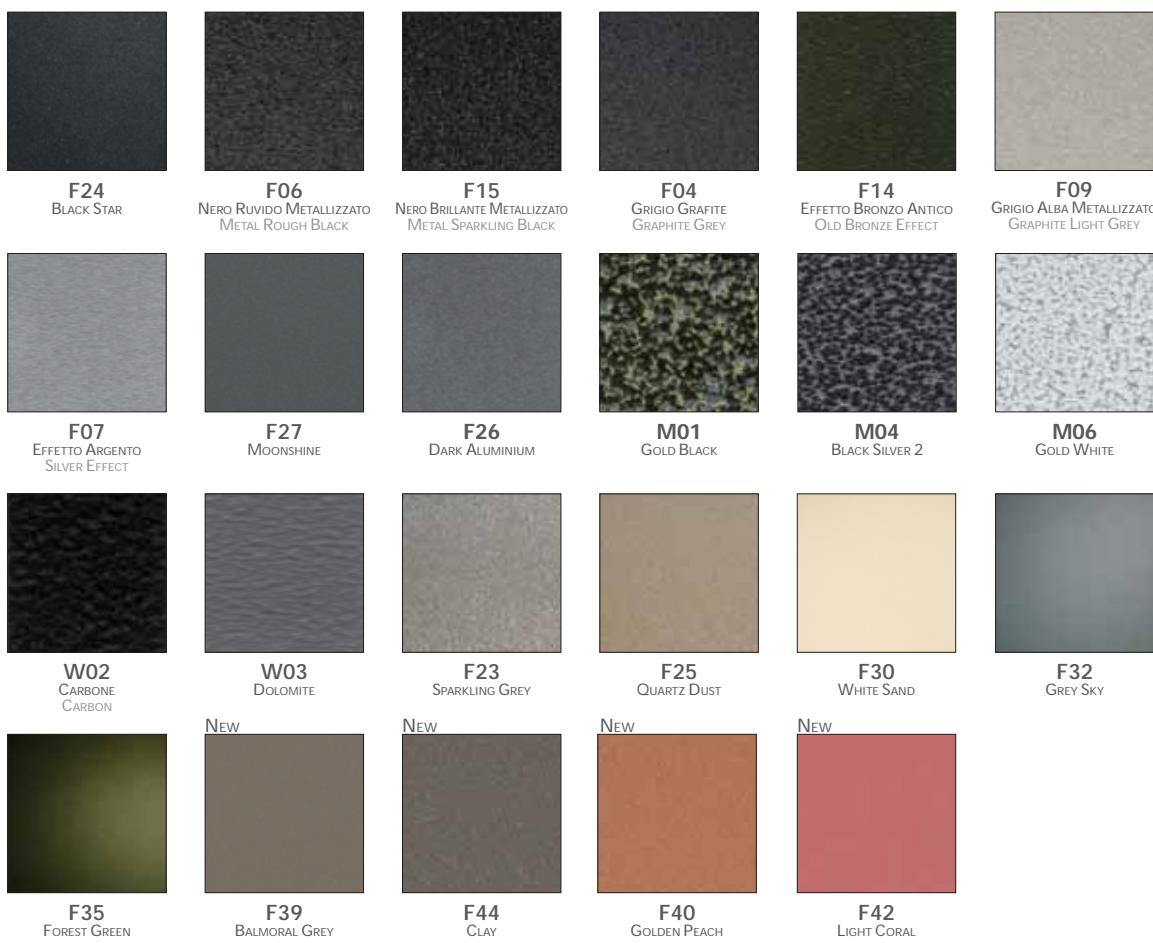

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

For a more accurate consultation of the colours, please refer to CORDIVARI DESIGN COLOUR SYSTEM.

PRODUCTS CERTIFICATES

CE DECLARATION OF CONFORMITY

CE DECLARATION OF CONFORMITY
Every Cordivari radiators has a precise declaration of conformity according to the standard CPR 305/2011.

TEST REPORT

TEST REPORT

Determination of thermal output according to the standard EN 442-1 and EN 442-2, relevant characteristic formula, nominal power expressed in Watts a ΔT 50°C.

TEST REPORT

TEST REPORT
Certificate of Laboratory MRT (Politecnico di Milan-Italy) on following tests: hydraulic pressure test, maximal operating pressure, endurance and conformity of radiator to the drawing's dimensions according to the standard EN 442-1 e EN 442-2.

TEST REPORT

TEST REPORT

Test report from MRT (Politecnico di Milano-Italy) about: thermal output, hydraulic pressure test.

TEST REPORT

TEST REPORT

TEST REPORT

TEST REPORT

| Bewohnte Zusammenfassung der Inspektion Final summary table | | | | | |
|--|--------------------------|--|-----------|------------|----------------------|
| Datum Date | Serial No. Serial No. | Titel Subject | Ja Yes | Nein No | Bemerkungen Notes |
| 04-08-2008 | | Art und Bezeichnung des Granitbeschichtungsstoffes oder der Beschichtung | X | | |
| 13-07-2008 | 10272340 | Wechsel- / Oberflächenbeschichtung und Verarbeitung des Untergrundes | X | | |
| 13-07-2008 | 10272341 | Art und Bezeichnung des Deckbeschichtungsstoffes oder der Farbe | X | | |
| 04-08-2008 | | Art und Bezeichnung des Klebstoffes, Klebefähigkeit, Klebefestigkeit, Klebehalt und Verarbeitung des Untergrundes sowie Art und Bezeichnung der Beschichtung | X | | |
| 13-07-2008 | 10272340 | Art und Bezeichnung des Beschichtungsstoffes, Art und Bezeichnung der Haltungsbedingungen der Beschichtung | X | | |
| 04-08-2008 | | Art und Bezeichnung der Klebefestigungen | X | | |
| 23-07-2008 | 10272340 | Arbeitsvorgangsdauer im Raumheizkörper bei Prüfung fertiggestellter Heizkörper | X | | |
| 08-11-2008 | 179419402442 | Kreuzspalte und -Gitter-Abmessung | X | | |

PAINTING PROCESS CERTIFICATION ACCORDING TO DIN 55900-1, -2

 Universität Stuttgart

TEST REPORT FROM LABORATORY
HLK (UNIVERSITY OF STUTTGART)
ACCORDING TO DIN 55900-1, 55900-2

| | | |
|--|------------|--|
| Nr. / No.: H-08061524.COR | | IGE Institut für GebäudeEnergetik |
| 1 Prüf- und Inspektionsstelle Laboratory | | Universität Stuttgart, Institut für GebäudeEnergetik, Pfaffenwaldring 35 / 6A 70569 Stuttgart Germany +49 (0)711 6165 - 62061 |
| 2 Vertragsspanner Contracting partner | | Costrav S.r.l. Zona Industriale Padiglie 64020 Morro d'Oro (TE) Italy |
| 3 Quellenangebot References | | DIN 50900-1, Mai 2002 DIN 50900-2, Mai 2002 |
| 4 Hersteller Manufacturer | | Concord S.r.l. Zona Industriale Padiglie 64020 Morro d'Oro (TE) Italy |
| 5 Ort und Datum der Inspektion Place and date | | Stuttgart, 2008-08-04 |
| 6 Auftrag Application | | (Überprüfung der Dokumente zur Einhal- tung der Deutschen Norm für die Be- schaffung von Raumheizkörpern, gemäß DIN 50900-1, 2) |
| 11 Festgestellte Abweichungen zur Norm- Kontrollkriterien Non-conformities | | Keine Abweichungen |
| Stuttgart, 2008-08-04 | |  |
| Institut für GebäudeEnergetik Universität Stuttgart Pfaffenwaldring 35 70569 Stuttgart +49(0)711 6165-62061 / Fax +49(0)711 6167006 www.gebaeudeenergetik.de | | |
| Prof. Dr.-Ing. M. Schmid | J. Stimpel | |

TEST REPORT FROM LABORATORY
HLK (UNIVERSITY OF STUTTGART)
ACCORDING TO DIN 55900-1, 55900-2.

COMPANY SYSTEM CERTIFICATES



ENVIRONMENT SYSTEM CERTIFICATE UNI EN ISO 14001

Cordivari has always had among its goals:

- Continual improvement of its products
- Minimal environmental impacts
- Achievement of total quality



QUALITY SYSTEM CERTIFICATE UNI EN ISO 9001

CE RADIATORS MARK

CE radiators mark: main aspects

CE mark of radiators is the compliance to the minimal security requirements of European Directive of Standard 89/106/CEE and to the relevant EN 442-1-2-3.

The CE mark for radiators is compulsory since 01/12/2005.

The main requirements and tests:

- Thermal output with relevant heat loss and characteristic formula tested by a certified laboratory as CETIAT, MRT and HLK.
- Conformity to the directive 76/769/CEE regulating the use of dangerous substances during painting process.
- Fire resistance according to EN 13501-1
- Corrosion resistance, endurance in humid atmosphere (min. 100 hours)
- Pressure test

The symbol of CE mark, in conformity to the directive 93/68/CEE, together to other technical information, is applied on the product and on its packaging.

Main Standards regulating the construction of design radiators

UNI EN 442-1:2015

Radiators and convectors - Part 1 Technical specifications and requirements

UNI EN 442-2:2015

Radiators and convectors - Part 2 Test Methods and Rating

UNI EN 13501-1:2009

Fire class of products and construction parts.

CPR 305/2011

Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC

93/68/CEE

CE mark.

PRODUCT CERTIFICATES

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

GENERAL SALES AND WARRANTY CONDITIONS

Sales of Cordivari's products are made according to the conditions listed below. Exceptions should be accorded in written by Cordivari Srl.

1. SHIPMENT

Goods are transported at buyer's risk and peril. Goods must be inspected at the moment of the delivery, in the presence of the carrier. The Buyer is required to check the integrity of the packaging, and if there might be missing or confused products. Any claim has to be immediately communicated to the carrier, signing the shipment's document with reservation of inspection.

Followingly, the Buyer shall send formal signalation to Cordivari Srl via registered email. Any signalation shall be sent within maximum 8 days from receipt of the goods. In absence of the aforementioned conditions, Cordivari Srl is cleared of any liability.

2. DELIVERY TERMS

Delivery terms are indicative. Failure to comply with the agreed delivery terms for any reasons will not entitle the buyer to any compensation, cancellation or modification of the order without Cordivari Srl prior consent. In case of strikes, lack in raw materials, or any other Act of God, Cordivari Srl reserves the right to decide proper countermeasures; in this case Cordivari Srl should be considered exempted from any responsibility. Shall ordered goods not be collected within agreed date, the same will be invoiced and stored with risks and costs charged to the customer.

3. DRY WEIGHT, MEASURES, SURFACES

Dry Weights, measures, surfaces, shapes, sizes, images and other figures related to the products are merely indicative and Cordivari Srl may at any time modify them.

4. ORDER CANCELLATION OR MODIFICATION

All orders are valid only if accepted in written form by Cordivari Srl. No orders shall be cancelled even partially without the consent of Cordivari Srl. It will not be possible to modify the order when the production has already started. Any cost due to the modifications or cancellation will be of buyers charge.

5. RADIATORS/ACCESSORIESES WARRANTY ON CONSTRUCTION DEFECTS

Cordivari Srl guarantees 10 years for all stainless steel radiators in the hot water version. For all radiators with circuits other than stainless steel, Cordivari Srl guarantees 5 years in the hot water version. For all electrical products, accessories and all residual items not contemplated in the conditions of sale, Cordivari Srl guarantees within the terms and for the period of time established by Directive 1999/44/EC on certain aspects of the sale of consumer goods and associated guarantees.

- The warranty period starts with the date of the delivery of the material by Cordivari and this warranty is invalidated if the code of the radiator with the date is removed or modified.
- Warranty is only valid if Cordivari S.r.l. is notified by registered mail about the fault within 8 days from delivery.
- Warranty will take effect after having examined the defects and their causes in the Cordivari plant.
- The materials that have to be replaced or repaired must be shipped free of charge to the Cordivari plant.

Warranty will be applicable at the following conditions:

- materials must have been stored in good conditions and protected from the inclemency of the weather before installation;
- radiator did not have damages during transport, handling or installation;
- no alterations or reparations must be done without the prior consent of the seller;
- the buyer must have paid all the bills within the pre-established deadlines;
- if for cleaning none of those aggressive, corrosive, substances not suitable for radiators material have been used;
- the installation must have been done by professionals and in conformity with all instructions and standards written on the technical data sheets provided by Cordivari S.r.l.;
- no periodical emptying or charging of the system must have taken place;
- no aggressive chemical substances must have been added to the water of the system
- the working pressure and temperature shown in the catalogue must correspond to the current usage pressure and temperature;

© Copyright Cordivari S.r.l.

All rights such as reproduction, diffusion and translation are reserved. No part of this brochure can be reprinted or reproduced to any other form without a written authorization by Cordivari Srl. The present catalogue substitutes and invalidates all previous editions. Cordivari reserves the right to modify in every moment products and figures reported in the catalogue and has no responsibility for any press mistake.

- the caps and Accessorieses used must be original Cordivari materials;
- radiator has not been connected to a system with open expansion tank;
- the radiators must not have been connected to the sanitary water system;

The warranty doesn't cover construction or dismantling costs to move the product from/to the installation place.

In case of using antifreeze, it should never be used pure, but it has to be diluted before including in the heating system.

In case of using anti-corrosion, it has to be compatible with all the material composing the heating elements of the radiator.

In case of preinstalled Cordivari's caps, each alteration of those caps will void the warranty of the product. Cordivari will not assume responsibilities for radiator assembled by other people and/even for caps which are not by Cordivari. Cordivari's warranty immediately cease in case of reparations or modifications on products without the previous agreement of Cordivari.

Heating system should be without any remaining of metals, calamine, grease, and without presence of gaz.

Before starting the heating system, make a rinse to clean any residual from the installation/working.

Warranty will not be valid in case of damages caused by electrical system.

The purchaser may not claim any other cost of direct or indirect damage to person or properties resulting from above confirmed defects.

6. PAYMENTS

All invoices have to be paid according to the agreed deadline. Any delay, even partial may suspend the planned deliveries. Overdue interest could be charged at current rates.

7. GOODS' PROPERTY

Cordivari Srl remains owner of the delivered goods until they are not completely paid. In case of failure to proceed to the payment, Cordivari Srl could ask for immediate restitution of goods and keep the paid partial amount as indemnity. Cordivari Srl can reserve the right to evaluate bigger damages caused by the outstanding amount.

8. PRICES

Prices are not binding and can be modified without communication and can be modified on basis of the modifications which could appear before and during delivery. Prices are intended on FCA-MORRO D'ORO Incoterm 2010 basis, except in case of written agreements. For some voluminous delivery Cordivari may charge some extra-costs. All prices indicated are V.A.T. excluded.

9. ORDERS/DELIVERY

The Order value is minimum EURO 2.000,00. Given orders are binding to the buyer, who acknowledges of all our sales conditions.

Delivery is intended to customer warehouse; for any different destination please ask to our sales dept.

10. COURT AUTHORITY

For the following Catalogue and conditions only the provisions of Italian law will be used. For controversy, the Court of Teramo (Italy) shall have exclusive competence. Essential and trial law shall be exclusively Italian.

11. ORIGINAL VERSION

Being a translation, the Italian language is the only valid language for interpretation and conditions of this catalogue version.

CONDIZIONI DI VENDITA E GARANZIA

La vendita dei prodotti viene effettuata conformemente alle sotto elencate condizioni generali di vendita e garanzia. Ogni deroga è subordinata all'accettazione scritta da parte dalla Cordivari Srl.

1. SPEDIZIONE

La merce viaggia a rischio e pericolo del Committente, anche se viene spedita franco destino. La merce deve essere verificata all'atto della consegna, controllando l'integrità dell'imballo, articoli mancanti o sostituzioni in presenza del trasportatore. Ogni contestazione dovrà essere segnalata immediatamente al trasportatore/corriere firmando con riserva il DDT e confermando tale riserva a mezzo lettera raccomandata o posta certificata entro otto giorni dal ricevimento della merce.

2. TERMINI DI CONSEGNA

I termini di consegna si intendono approssimativi e comunque se il termine di consegna non potesse essere rispettato per qualsiasi motivo, il Committente non avrà diritto a esigere alcun indennizzo, pagamenti di penali, annullamento o modifica all'ordine conferitoci. In caso di eventi straordinari quali calamità naturali, scioperi, mancanza di materie prime, e cause di forza maggiore, la Cordivari Srl si riserva la scelta delle misure da adottare.

Se la merce ordinata non viene ritirata nel periodo concordato, questa verrà fatturata e immagazzinata con costi, rischio e pericolo a carico del committente.

3. PESI, MISURE, SUPERFICI

Pesi, misure, superfici, forme, dimensioni, immagini e altri dati sono indicativi e non impegnativi e possono subire delle modifiche o variazioni che la Cordivari Srl si riserva di apportare ai suoi prodotti senza preavviso.

4. ANNULLAMENTO O MODIFICA ORDINE

Senza il consenso scritto della Cordivari Srl, le ordinazioni conferite non possono essere né parzialmente né totalmente annullate o modificate. Non si accordano variazioni o modifiche quando sia già stata intrapresa la lavorazione. Eventuali spese derivanti dall'annullamento o modifica dell'ordine saranno fatturate al Committente.

5. GARANZIA RADIATORI/ACCESSORI

Per tutti i radiatori d'arredo in acciaio inox nella versione acqua calda la Cordivari Srl garantisce 10 anni. Per tutti i radiatori con il circuito diverso dall'acciaio inox, sempre nella versione acqua calda la Cordivari Srl garantisce 5 anni. Per i tutti i prodotti electric, gli accessori e per tutti gli articoli residuali non contemplati nelle condizioni di vendita la Cordivari Srl garantisce nei termini e per il periodo di tempo stabilito dalla legge nazionale di recepimento della Direttiva Garanzie 1999/44/CE.

- La garanzia decorre dalla data di consegna da parte della Cordivari e decade se viene manomessa e/o rimossa l'indicazione del lotto di produzione.
- I prodotti diventati inutilizzabili per difetti di costruzione saranno riparati o sostituiti gratuitamente franco Vs. destinazione.
- La condizione essenziale affinché la garanzia sia valida è che i difetti riscontrati siano notificati entro 8 (otto) giorni dal ricevimento della merce, per iscritto tramite raccomandata A/R o posta certificata.
- La garanzia sarà operante previo esame dei difetti e delle loro cause presso la sede della Cordivari Srl.
- Il materiale da sostituire o riparare dovrà essere consegnato franco magazzino presso la Cordivari Srl.

L'impegno di prestare la garanzia sussiste a condizione che:

- Il materiale sia stato immagazzinato in buone condizioni e al riparo dalle intemperie prima di essere installato;
- Il radiatore non abbia subito danneggiamenti durante il trasporto, le movimentazioni o l'installazione;
- Non siano state effettuate manomissioni o riparazioni dei prodotti senza l'autorizzazione della Cordivari Srl;
- Il compratore abbia effettuato il saldo dei pagamenti nei termini prestabiliti;
- L'installazione sia stata realizzata da personale qualificato e in conformità alle istruzioni e alle norme indicate sulla documentazione tecnica fornita dalla Cordivari Srl;
- Per la pulizia del radiatore non siano stati utilizzati detergenti aggressivi, abrasivi incompatibile con il materiale del corpo scaldante.
- Non siano stati effettuati svuotamenti o caricamenti periodici dell'impianto;
- Non siano state effettuate aggiunte di sostanze chimiche aggressive all'acqua dell'impianto, e siano stati rispettati i valori guida secondo la normativa UNI 8065 con opportuni trattamenti dell'acqua;
- La pressione e la temperatura di esercizio indicate sul catalogo corrispondano

alla pressione e alla temperatura massima di esercizio;

- Il circuito sia esente da residui di metallo, calamina, grasso e non ci sia presenza di gas. Prima della messa in funzione dell'impianto, eseguire un lavaggio per eliminare residui di lavorazione meccanica e/o residui in fase d'installazione.
- I tappi e gli accessori utilizzati siano quelli regolarmente forniti dalla Cordivari srl;
- I radiatori non siano stati collegati all'impianto dell'acqua calda sanitaria.
- I radiatori non siano collegati ad impianti con vaso di espansione aperto. Nel caso in cui si utilizzi l'antigelo, esso non dovrà mai essere utilizzato puro, ma diluito prima di essere introdotto nel circuito.

Nel caso in cui si utilizzi un inibitore di corrosione, esso dovrà essere compatibile con tutti i materiali presenti nei corpi scaldanti.

In caso di prodotto con tappi premontati dalla Cordivari Srl, qualsiasi manomissione degli stessi, porterà fuori garanzia il prodotto. La Cordivari Srl non si assumerà comunque responsabilità su batterie assemblati da terzi, e/o con tappi e riduzioni assemblati da terzi. Qualora il Cliente esegua modifiche o variazioni di sua iniziativa sui materiali in contestazione senza il nostro preventivo benestare, decade immediatamente ogni responsabilità della Cordivari Srl.

La garanzia inoltre non opera in caso di anomalie o guasti dipendenti dalla rete d'alimentazione elettrica.

La garanzia non copre costi dovuti a demolizioni, opere murarie, lavori per il passaggio e la collocazione dei prodotti sia in ingresso che in uscita e la manodopera per eventuali sostituzioni di prodotto.

Cordivari Srl si impegna durante il periodo di garanzia alla sostituzione del prodotto reso e riconosciuto difettoso per accertati difetti di produzione, oltre a ciò il Committente non potrà vantare alcun altro risarcimento per spese di danno, dirette o indirette di qualsiasi natura a persone e/o a cose derivanti da detti difetti.

6. PAGAMENTI

I pagamenti delle fatture relative alle forniture dovranno essere effettuati entro i termini di scadenza stabiliti.

Il ritardo nel pagamento delle fatture, anche se parziale, dà luogo alla decorrenza degli interessi di mora nella misura del tasso corrente, oltre alla sospensione immediata delle spedizioni in corso e del processamento di eventuali ordini.

7. RISERVA DI PROPRIETÀ

I prodotti restano di proprietà della Cordivari Srl fino al pagamento dell'ultima rata di prezzo di merce consegnata.

In caso di inadempimento anche parziale del compratore la Cordivari Srl potrà chiedere l'immediata restituzione della merce trattenendo comunque le rate pagate a titolo di indennità salvo il maggior danno.

8. PREZZI

I prezzi non sono impegnativi e possono essere modificati senza preavviso. I prezzi sono revisionabili in funzione delle variazioni che dovessero intervenire fino al momento della consegna. I prezzi si intendono resa franco stabilimento di Morro D'Oro (TE), salvo diversi accordi. I prezzi sono sempre riportati nel listino al netto di IVA. Per modelli ingombranti la Cordivari srl si riserva di chiedere una partecipazione alle spese di imballaggio.

9. ORDINI/CONSEGNA

Il valore minimo per ordine è di Euro 2.000. Gli ordini impartiti impegnano definitivamente il Committente che deve dichiarare di conoscere e accettare tutte le condizioni di vendita.

La consegna si intende esclusivamente presso la sede/magazzino del Committente. Richieste particolari del Committente avranno costi addizionali che verranno comunicati di volta in volta dal nostro ufficio commerciale.

10. FORO COMPETENTE

Per qualsiasi controversia derivante dal presente contratto o collegata allo stesso è competente il Foro di Teramo.

© Copyright Cordivari Srl

Tutti i diritti, in particolare quelli di riproduzione, diffusione e traduzione sono riservati. Nessuna parte di questa opera può essere ristampata o riprodotta in qualsiasi altra forma senza l'autorizzazione scritta della Cordivari. Il presente catalogo sostituisce ed annulla tutte le edizioni precedenti. La società si riserva la facoltà di modificare in qualsiasi momento i prodotti e i dati riportati a catalogo e non risponde degli eventuali errori tipografici.

WARRANTY

INOX STYLE

EXTRASLIM®

NEO DESIGN

CLASSIC LINE

GRAPHIC PICTURE

ACCESSORIES
TECHNICAL SUPPORT

MODEL**MODEL**

| | | | | | |
|--|-----|------------|--|-----|------------|
| Andrea | 146 | 306 | Fujiko polished stainless steel | 60 | 236 |
| Andrea electric | 150 | 308 | Giuly® | 70 | 242 |
| Babyla gold polished stainless steel | 52 | 230 | Giuly® sl | 74 | 244 |
| Babyla polished stainless steel | 50 | 228 | Groove® | 160 | 318 |
| Babyla satin stainless steel | 48 | 226 | Hand® | 82 | 250 |
| Badge® | 76 | 246 | Hand® electric | 84 | 252 |
| Badge® control | 76 | 246 | Jacky | 152 | 310 |
| Badge® electric | 80 | 248 | Jacky electric | 154 | 312 |
| Blow® polished stainless steel | 28 | 208 | Jungle® | 94 | 260 |
| Celine electric polished stainless steel | 58 | 234 | Jungle® control | 98 | 260 |
| Celine polished stainless steel | 54 | 232 | Kelly 18 electric polished stainless steel | 42 | 220 |
| Debby | 158 | 316 | Kelly 18 polished stainless steel | 40 | 218 |
| E.Sign | 86 | 254 | Kelly 38 polished stainless steel | 44 | 222 |
| Frame | 120 | 282 | Kelly 38 satin stainless steel | 46 | 224 |
| Frame blower | 140 | 300 | Lola® inox decor X03 | 24 | 200 |
| Frame blower dual energy | 144 | 304 | Lola® inox decor X04 | 26 | 200 |
| Frame electric | 138 | 296 | Lola® polished stainless steel | 18 | 198 |
| Frame inox | 112 | 268 | Lola® satin stainless steel | 16 | 196 |
| Frame inox blower | 141 | 298 | Movie® | 90 | 256 |
| Frame inox blower dual energy | 142 | 302 | Movie® electric | 92 | 258 |
| Frame inox decor X03 | 116 | 274 | Retrò I | 169 | 324 |
| Frame inox decor X03 plus | 117 | 276 | Retrò I electric | 175 | 326 |
| Frame inox decor X04 | 118 | 278 | Retrò II | 168 | 324 |
| Frame inox decor X04 plus | 118 | 280 | Retrò II electric | 174 | 326 |
| Frame inox electric | 136 | 294 | Retrò III | 172 | 324 |
| Frame inox plus | 113 | 270 | Retrò III electric | 174 | 326 |
| Frame Lynea | 126 | 290 | Rio® polished stainless steel | 34 | 212 |
| Frame max | 124 | 288 | Rio® satin stainless steel | 32 | 210 |
| Frame picture | 184 | 344 | Roads® | 162 | 320 |
| Frame picture Artic | 346 | 346 | Roads® Stf | 164 | 322 |
| Frame picture Convivium | 352 | 352 | Rosy graphic Ring | 190 | 356 |
| Frame picture Corallo | 180 | 346 | Rosy graphic Totem black | 188 | 356 |
| Frame picture Iris 03 | 346 | 346 | Rosy graphic Totem white | 188 | 356 |
| Frame picture Lagoon Azul | 346 | 346 | Rosy graphic Urban black | 192 | 360 |
| Frame picture Season | 182 | 346 | Rosy graphic Urban white | 192 | 360 |
| Frame plus | 121 | 284 | Sfere | 66 | 240 |
| Frame trends Etero | 330 | 334 | Sfere trittico | 64 | 238 |
| Frame trends Macro Natural | 328 | 334 | Stradivari satin stainless steel | 36 | 214 |
| Frame trends Materia | 178 | 334 | Tessuto® | 102 | 262 |
| Frame trends Pop Memory | 332 | 334 | Yara | 156 | 314 |

ALPHABETICAL INDEX

www.cordivaridesign.com