


Below You can find instruction to fix bracket and radiator to the wall.

Step 1: Fix the metal part of top hook with hole 1 as it shown on Position 2 picture.

Pull the hook under the tab that fits into the hole downwards, as in Position 3 picture, and insert it into the Hole 2 on the bracket.



Position 1



Position 2



Position 3




Position 4



Position 5

Step 2: Choose the location where your radiator will be installed and check that there is no pipe and cable connections where the holes will be drilled. Your radiator must be installed at least 110 mm above the floor for adequate air flow. Drill an 8 mm diameter hole in the wall and insert the dowels into the drilled holes.

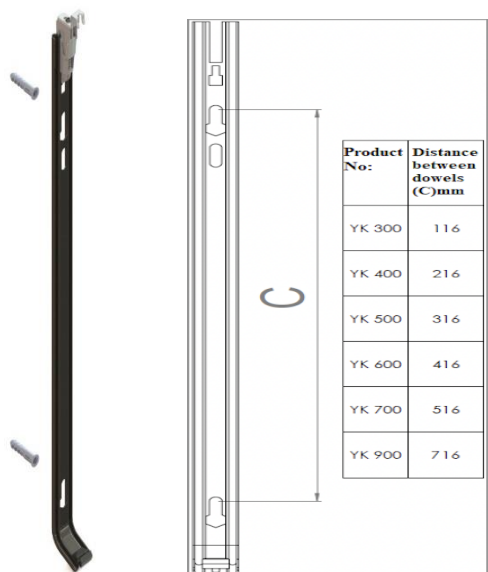

Position 6

Step 3: Mount the bracket to the wall plugs with the help of screws.



Position 7

Step 4: Loosen the safety lock screw. Remove the top hook to the upward direction as it shown on Position 8. Check to make sure the installation of bracket to the wall is correct before radiator installation.



Position 8



Position 9

Step 5: To mount the radiator, first - place the radiator on the tab of the bracket bottom part (Position 10). When top hook touches radiator, it should automatically fix the top grill. Tighten the screw on top hook as it shown in Position 9 picture. Mounting is completed.



Position 10