

URBAN

PELLET STOVE



Heating your home while saving money doesn't mean giving up quality.
URBAN is the beautiful and functional solution with the right ratio
quality-price. A stove that fits all pockets!


Heatable area

64 m².






- 1 - Programmable control screen, with remote control
- 2 - Lid with hermetic closure
- 3 - Removable handle. Essentiality in design and greater safety
- 4 - Cast iron burner
- 5 - Space-saving left side smoke outlet (optional)
- 6 - Precious glass and cast iron firebox door

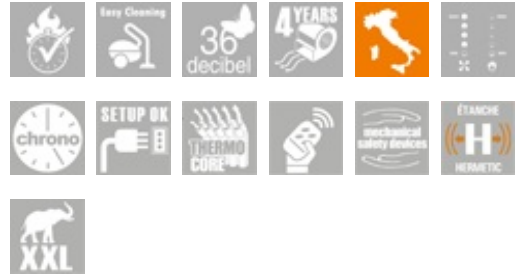

OPTIONAL ACCESSORIES



DIMENSIONS

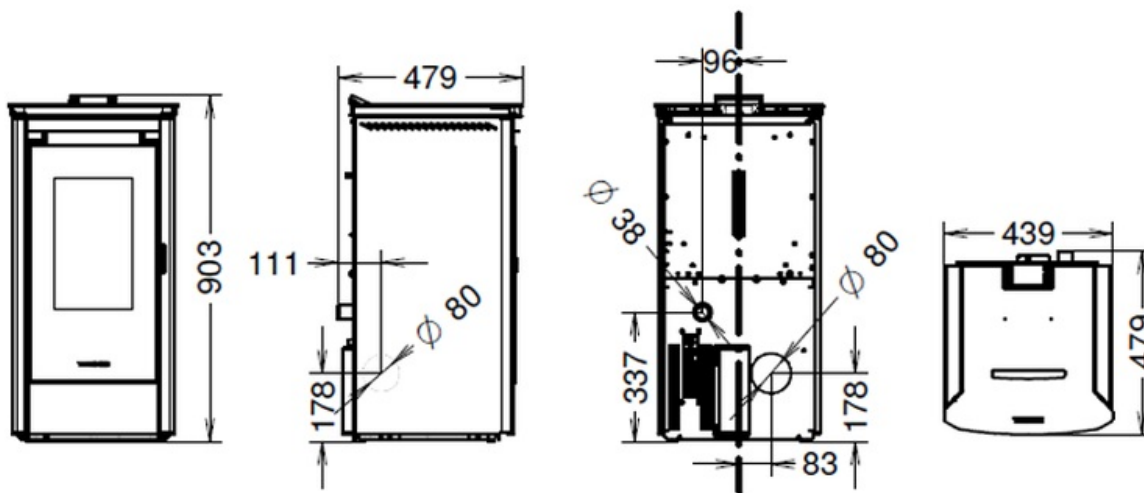

TECHNICAL DATA

DIMENSIONS (HXWXD)	903X439X452
WEIGHT (KG)	83
HEATABLE AREA (M ²)	64
EFFICIENCY UP TO MAX (%)	93,1%
ENERGY CLASS	A+
POWER TO THE HEART (KW)	4 - 8
RATED POWER (KW)	3,7 - 7,1
POWER TO THE WATER (KW)	-
RADIATION (KW)	-
HOURLY PELLET CONSUMPTION (KG/H)	0,6 - 1,5
WOOD HOURLY CONSUMPTION (KG/H)V	-
PELLET HOPPER CAPACITY (KG)	17,00
WARM AIR DUCTING	-
MAXIMUM SINGLE DUCTING OUTLET (M)	-
PATENTED BURNER PELLETPOWER®	-
ROMM VENTILATION	SI
PRIMARY AIR FROM OUTSIDE	SI
CO EMISSIONS (MG/M ³ ; 13% DI O ₂)	79
CO EMISSIONS (MG/M ³ ; 10% DI O ₂)	-
DUST EMISSIONS (MG/M ³ ; 13% DI O ₂)	12,0
DUST EMISSIONS (MG/M ³ ; 10% DI O ₂)	-
SILENCE(DB)	36,00
REMOTE CONTROL	SI
RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT	OPT
WEEKLY PROGRAMMER (3 DAILY LIGHTING)	SI
SMART INFO FUNCTION	SI
SYSTEM CIRCULATING PUMP	-
EXPANSION TANK	-
OVER PRESSURE VALVE	SI
FLUE GASEXHAUST DIAMETER (MM)	80

MIN. FLUE DRAUGHT PRESSURE (PA)	12
ELECTRIC CONSUMPTION (WATT)	50-380
HIGH TEMPERATURE SAFETY THERMOSTAT	SI

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: info@thermorossi.it

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.