


SC REFAROM SA



<b>PLACI FIBRA CERAMICA,</b>	1260
<b>Temperatura maxima de utilizare, oC</b>	1260
<b>Compozitia chimica</b>	
Al <sub>2</sub> O <sub>3</sub> [%]	50
SiO <sub>2</sub> [%]	49
altele	-
<b>Densitatea aparenta [kg/m<sup>3</sup>]</b>	300
<b>Contractia liniara [%]</b>	
600 [°C]	-
800 [°C]	-
900 [°C]	-
1000 [°C]	1
1100 [°C]	2
1250 [°C]	-
1400 [°C]	-
1500 [°C]	-
1600 [°C]	-
1700 [°C]	-
1750 [°C]	-
1800 [°C]	-
<b>Conductivitatea termica , W/mK</b>	
200 [°C]	0,09
400 [°C]	0,12
600 [°C]	0,15
800 [°C]	0,19
1000 [°C]	0,25
1200 [°C]	0,34
1400 [°C]	-

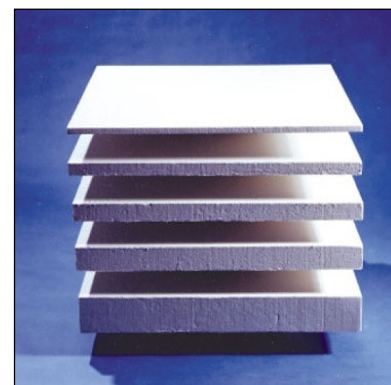

**Dimensiune:**

1200x600x25mm,