

This surface-mounted thermostat has been developed to be able to switch electric and conventional heating systems on and off using a set temperature and time.




Functions

- ✓ LCD display can be clearly read with the background lighting.
- ✓ Easy to fit thermostat and receiver.
- ✓ Three buttons make it easy to use.
- ✓ Non-programmable
- ✓ The display shows the set temperature as well as the measured temperature, time.
- ✓ Temperature display in degrees Celsius.

Technical Data

Thermostat operating voltage:	2 x AA1.5 V, alkaline batteries.
Backup storage:	EEPROM
Receiver operating voltage:	230 VAC, 50/60 Hz
Maximum voltage / (ohmic) load:	230 VAC/5 A.
Switch contacts:	NO and NC.
Temperature settings:	5°C ~ 35°C, 0.5°C increments.
Accuracy:	+/- 0.5°C
Thermostat dimensions:	Surface mounted, 112mm x 86mm x 22.7mm.
Color:	White
IP protection rating:	20.
Certification:	CE.


Display & Buttons

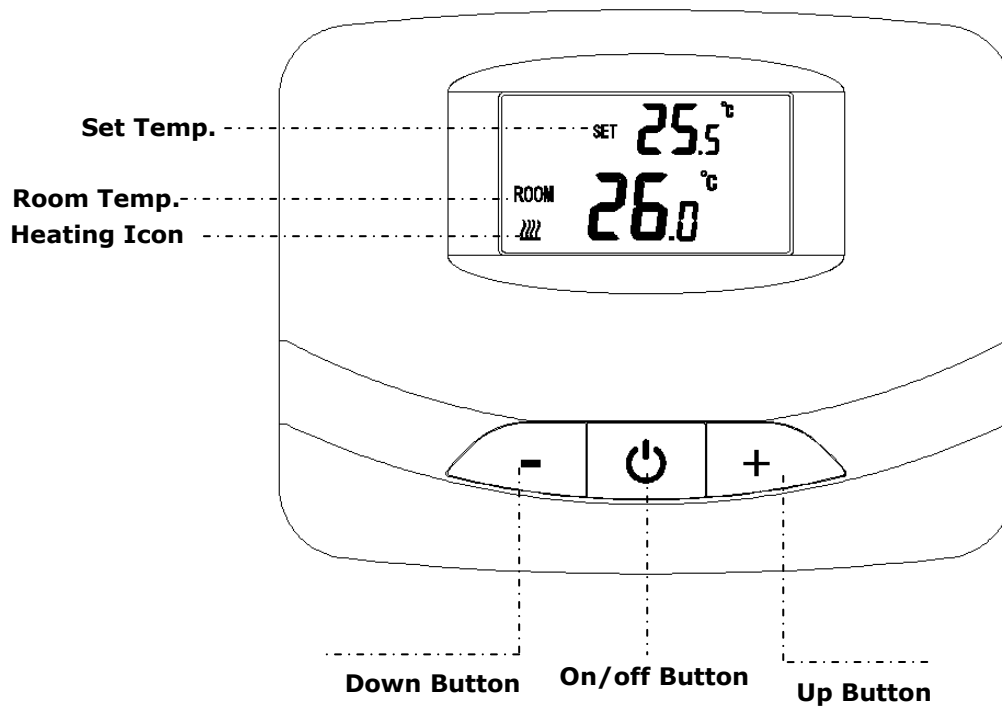


Temp. Calibration

Turn thermostat off, then press **M** button for 3 sec. to calibrate Temp. by pressing “+” and “-” buttons. Range : -8°C ~8°C


Wiring Diagram

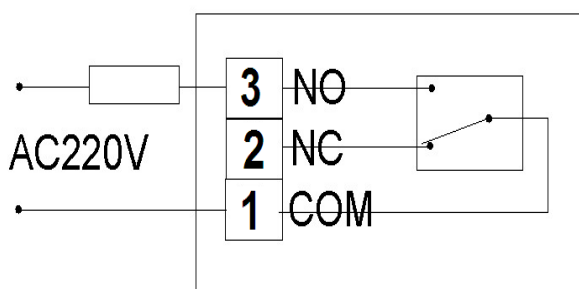


Dimensions

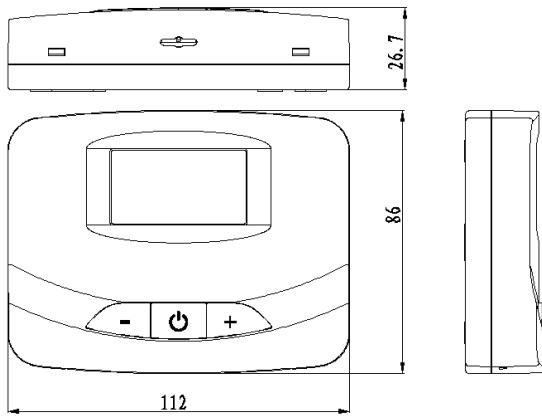


Installation




a. Open the thermostat



b. Fix the base on wall with provided screws



c. Install Battery



d. Close the thermostat