


Safety valve, female connection

Art. 447B

Safety valve, female connection

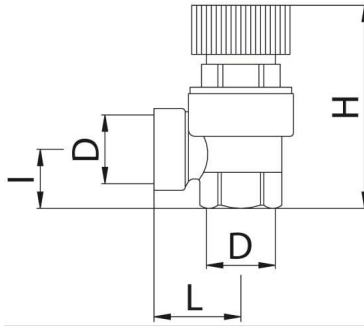

Items

Code	Version	Size (D)	Smooth	Handle	Pack	I	L	h
447B0004A1	1,5 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B000401	1,8 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B0004A2	2 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B000402	2,5 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B000403	3 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B000404	4 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B000406	6 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
447B000407	7 Bar	1/2"	●	● Plastic	10	18.0	25.0	62.0
4474B00408	8 Bar	1/2"	●	● Plastic	10	18.0	25.0	70.0
4474B00410	10 Bar	1/2"	●	● Plastic	10	18.0	25.0	70.0
447B0005A1	1,5 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000501	1,8 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000502	2,5 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000503	3 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000504	4 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000506	6 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000507	7 Bar	3/4"	●	● Plastic	10	24.0	30.0	80.0
447B000508	8 Bar	3/4"	●	● Plastic	10	25.0	32.0	80.0
447B000510	10 Bar	3/4"	●	● Plastic	10	25.0	32.0	80.0

Code	Version	Size (D)	Smooth	Handle	Pack	l	L	h
447B0006A1	1,5 Bar	1"	●	● Plastic	2	30.0	38.0	112.0
447B000602	2,5 Bar	1"	●	● Plastic	2	30.0	38.0	112.0
447B000603	3 Bar	1"	●	● Plastic	2	30.0	38.0	112.0
447B000604	4 Bar	1"	●	● Plastic	2	30.0	38.0	112.0
447B000606	6 Bar	1"	●	● Plastic	2	30.0	38.0	112.0
447B000607	7 Bar	1"	●	● Plastic	2	30.0	38.0	112.0

SMOOTH

- Yellow
- Chrome
- Nickel
- White

Working temperature: 0-110°C (solar 140°C)

Max working pressure: 10 bar

Opening overpressure: 10%

Closing differential: 20%

Tolerance: 10%

Body in forged brass

Threads: ISO 228

Made in accordance with the safety requirements laid down in European Directive 2014/68/EU (PED)