



EUROCONUS STRAIGHT LOCKSHIELD VALVE

TECHNICAL SPECIFICATIONS

MAX WORKING PRESSURE	10 BAR
MAX WORKING TEMPERATURE	100°C
THREADS	ISO228
CONNECTION FOR	COPPER, MULTILAYER, PEX PIPES




ART. 414DE

VERSIONS

ART.414DE	WITH ABS CAP
ART.414DEB	WITH BRASS CAP
ART.414DX	CONNECTION 24X19

MATERIALS

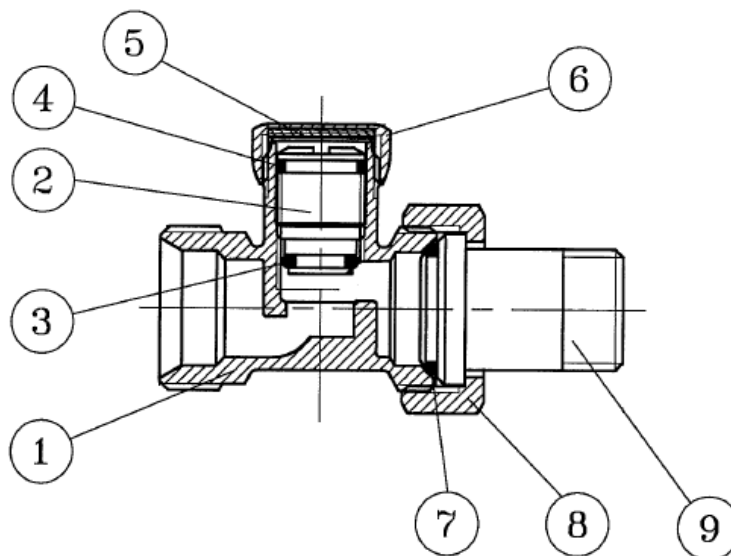


POS.	DESCRIPTION	N°	MATERIAL
1	BODY	1	BRASS CW617N
2	SCREW	1	BRASS CW614N
3	O-RING	1	NBR
4	O-RING	1	EPDM
5	GASKET	1	FIBER
6	CAP	1	ABS (ART.414E) - BRASS CW614N (ART.414EB)
7	O-RING	1	NBR
8	NUT	1	BRASS CW617N
9	TANG	1	BRASS CW617N





OVERALL DIMENSIONS

SIZE (D)	D1	H	L
1/2"	3/4"	30	71

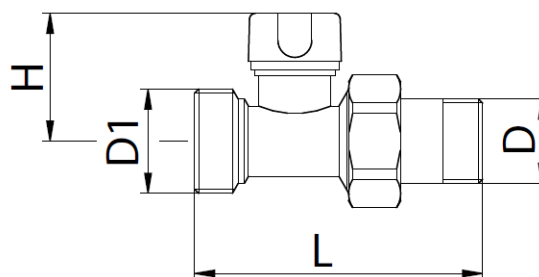

PRESSURE DROP DIAGRAMS

$$K_v \text{ 1/2"} = 1,8 \text{ m}^3/\text{h}$$

