



## Thermoelectric head 2 cables

### Art. 350

Thermoelectric head 2 cables

Average temperature: 0-100°

Closing and opening timing: 3-4 min.


Cable length pipe: 1m

Thermostatic valve attachment: M30x1,5

Protection: IP 54

Possible combination with manifolds equipped with interception valves and zone valves

Normally in close position

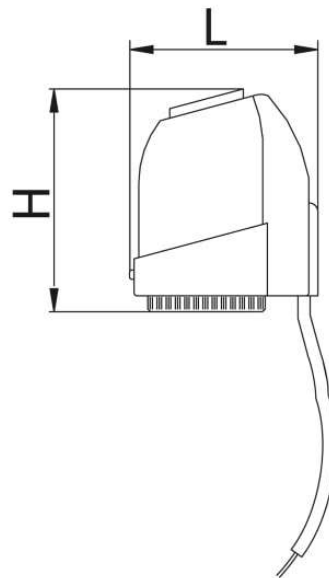

## Items

Code	Version	Smooth	Handle	Pack	h
3500000000	230V	○	● Plastic	1	56.0
35000V2400	24 V	○	● Plastic	1	56.0

### SMOOTH

- Yellow
- Chrome
- Nickel
- White

Thermostatic valve attachment: M30x1,5

Sensitive element: liquid

Body in shock-proof ABS

Possibility of blocking adjustment position

Available with thermostatic valves : THERMO, art. 384, 385T, 3851, 3851D

All thermostatic heads must be installed in horizontal position