


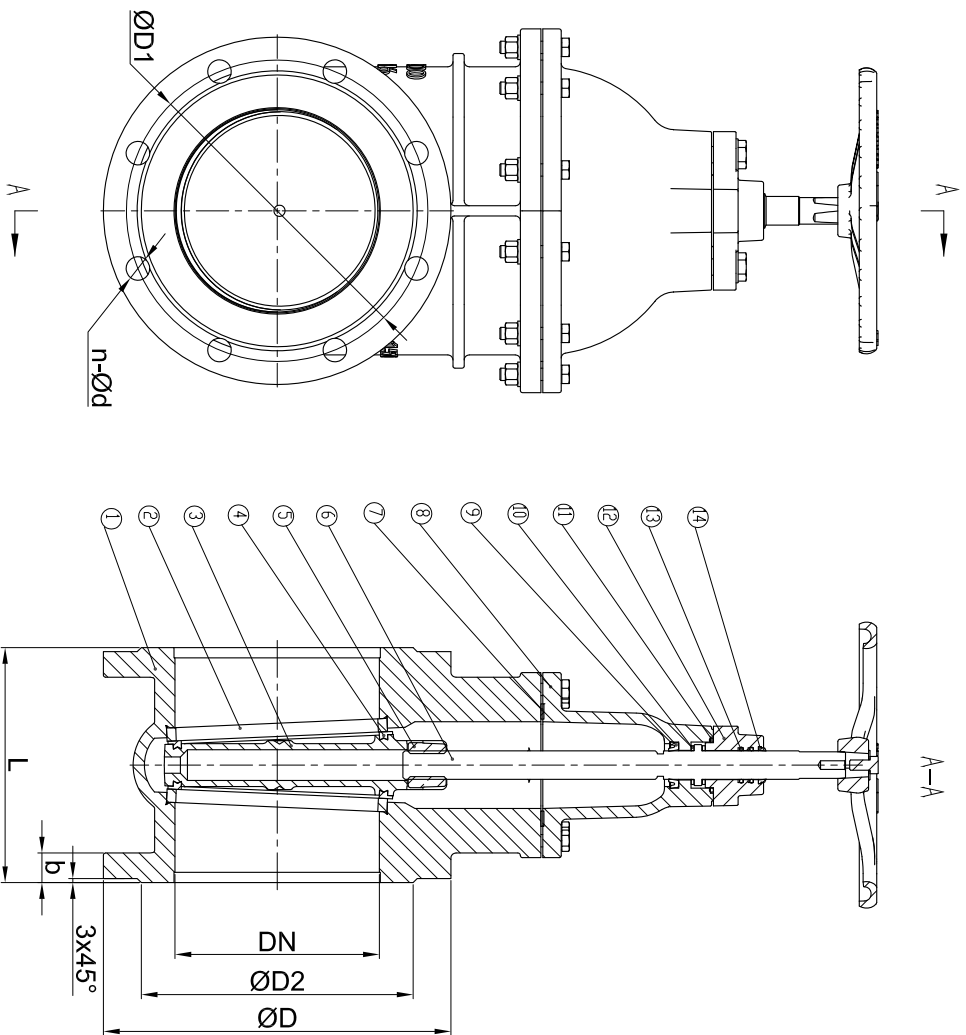

Pressure Test To ISO5208			
DN	Pressure Rating	Hydro-Test Pressure(MPa)	Seat
40-300	16	2.4	1.76

Design: DIN3352,
Face to face: DIN3352 F4
Flange drilling according to EN1092-2 PN16.
Field of application: Water, Rain water, Oil
Minimal and maximal temperature working: -20°C-120°C

DN	DIN3202F4	ØD	EN1092-2 PN16			H
	L		ØD1	ØD2	n-Ød	
40	140	150	110	84	4-19	20
50	150	165	125	99	4-19	20
65	170	185	145	118	4-19	20
80	180	200	160	132	8-19	22
100	190	220	180	156	8-19	24
125	200	250	210	184	8-19	26
150	210	285	240	211	8-23	26
200	230	340	295	266	12-23	30
250	250	405	355	319	12-28	32
300	270	460	410	370	12-28	32

Item	Part Name	Material	Item	Part Name	Material
1	Body	Ductile iron GGG50	8	Bonnet	Ductile iron GGG50
2	Seat Ring	Brass	9	V Seal	EPDMNBR
3	Wedge	GG25	10	Washer	Nylon
4	Wedge Ring	Brass	11	O Seal	EPDMNBR
5	Stem Nut	Brass	12	Gland	Ductile iron GGG50
6	Stem	SS420	13	O Seal	EPDMNBR
7	Bonnet Gasket	Graphite/EPDMNBR	14	Dust Guard	EPDMNBR

DRN	wang	WEIGHT	MATERIAL	
CHK		SCALE		
APP		DATE		
			Gate Valve	

		Z4514B(Z4724B)	
REV	20210703A		