


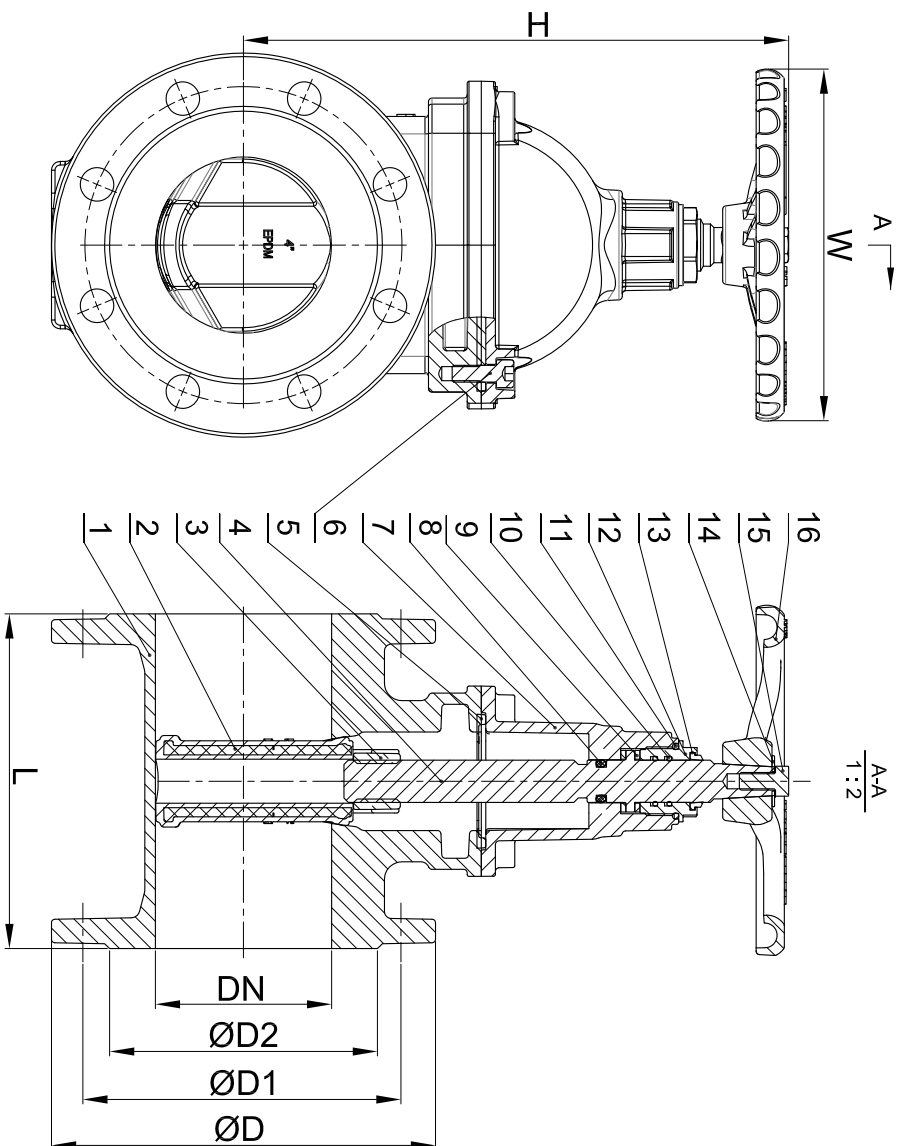

- Specification**
1. Design : DIN 3352
 2. Face to Face : DIN3202 F4
 3. Flange drilling : EN1092-2 PN16.
 4. Working pressure: PN10
 5. Temperature: 0~40°C
 6. Test : EN12266-1.

DN	L	ØD	EN1092-2 PN16			H	W
			ØD1	ØD2	n-Ød		
50	150	165	125	99	4-19	248	180
65	170	185	145	118	4-19	252	180
80	180	200	160	132	8-19	270	180
100	190	220	180	156	8-19	310	200
125	200	250	210	184	8-19	356	200
150	210	285	240	211	8-23	405	280
200	230	340	295	266	12-23	495	320
250	250	400	355	319	12-28	585	320
300	270	455	410	370	12-28	670	360

16	Handwheel	Ductile Iron		
15	Bolt	Galvanized steel		
14	Washer	Galvanized steel		
13	Dust Guard	EPDM		
12	Bushing Nut	Brass		
11	O ring	EPDM		
10	O ring	EPDM		
9	Stem Washer	Nylon		
8	O ring	EPDM		
7	Bonnet	GJSS500-7		
6	Bolt	Galvanized steel		
5	Bonnet Gasket	EPDM		
4	Stem	13Cr		
3	Stem Nut	Brass		
2	Wedge	GJSS500-7+ EPDM		
1	Body	GJSS500-7		
NO	Part Name	Material	Qty	Remark
DN	Wing	WEIGHT	Gate Valve	
CHK	SCALE			
APP	DATE	01/04/2021		
Hiwa			Z4714E	
REV			20210104a	