


## Flexible Rubber Joint Twin Sphere Union-Screw End Connection(XTQ2L), PN10/16



XTQ2L

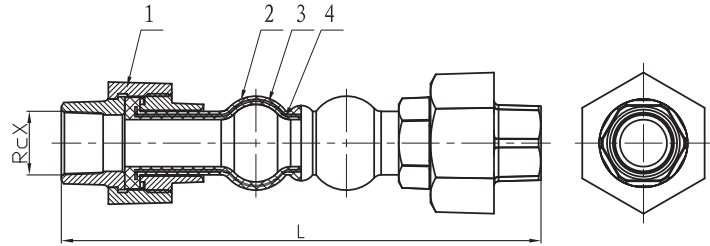

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification
1	Union	Malleable iron
2	Rubber (Outer)	EPDM
3	Reinforcing Fabric	Nylon Fabric
4	Rubber (Inner)	EPDM

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

- Thread: ISO 7-1
- Working Pressure: PN10/16
- Temperature Range: -10°C -115°C
- Vacuum Capacity: 500MM/HG

DN		Neutral Length(mm) L	Thread Rc X	Axial(mm)		Transverse Movement(mm)	Angular Deflection Deg.
Inch	mm			Elongation	Compression		
1/2"	15	200	Rc 1/2	6	22	22	40
3/4"	20	200	Rc 3/4	6	22	22	40
1"	25	200	Rc 1	6	22	22	40
1 1/4"	32	200	Rc 1 1/4	6	22	22	40
1 1/2"	40	200	Rc 1 1/2	6	22	22	40
2"	50	200	Rc 2	6	22	22	40
2 1/2"	65	240	Rc 2 1/2	6	22	22	40
3"	80	240	Rc 3	6	22	22	40

