


PLUS PERIMETER BELT



Plus perimeter belt is the edge insulation, which absorbs floor expansions and acts as thermo-acoustic insulation for the walls. It is made of expanded polyethylene with 100% closed-cell structure, and it is provided with an adhesive strip on one side, while on the other side it has a special polyethylene combined sheet in order to avoid infiltrations of mortar between belt and panel. This belt has small cuts on the backside to adjust its height.

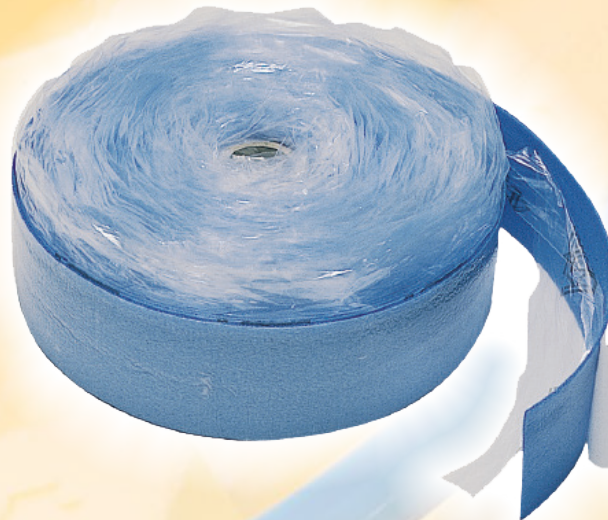

Code

1071250

Feature	Value	U.M.
Thickness	5	mm
Height	150	mm
Roll	50	m
Operating temperature	-10 ÷ 80	°C
Specific weight	22 - 25	Kg/m ³
Thermal conductivity	0,039	W/m · K
Noise reduction	25,5	dB
Dynamic rigidity	43	MN/m ³
Resistance to compression	13,002	kPa
Toxicity:		
Conventional toxicity value	10	
Smoke value	7	
Smoke category	F1	
Water vapour diffusion resistance factor	3817	
Cellular Structure	Closed Cells	

