

**Codice - Code:**

**A00258**

Cromolux reinforced nylon hose

**Descrizione - Description:**

Flessibile Cromolux retinato nylon Ø14 mm, 1/2" x 1/2" FF cono liscio in ABS

*Cromolux reinforced nylon hose Ø14 mm, 1/2" x 1/2" FF conical nut ABS plastic*

*Brauseschlauch Cromolux verstärkt mit Nylonfäden Ø14 mm, 1/2" x 1/2" F Drehkonus ABS*

*Flexible Cromolux renforcé nylon Ø14 mm, 1/2" x 1/2" F embouts conique en plastique ABS*

*Flexible Cromolux reforzado nylon Ø14 mm, 1/2" x 1/2" H racor cónico ABS*


*Шланг Cromolux из армированного нейлона Ø14 1/2" x 1/2" FF наконечник гладкий ABS*

**Tecnologia - Technology:**

**Immagine Prodotto - Product Image**




**Disegni - Drawings**

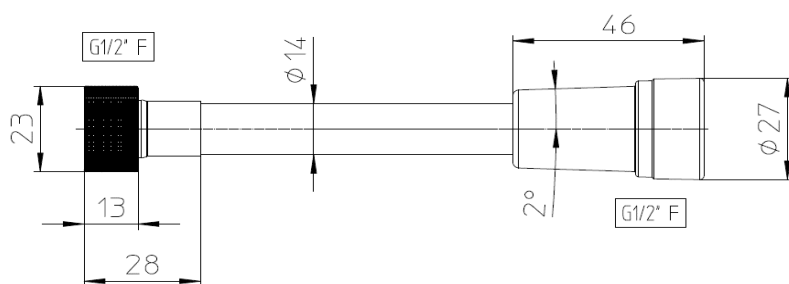

**Grafico di portata - Flow rate diagram**

0	0,0
0,5	10,0
1	15,4
1,5	19,2
2	22,8
2,5	25,7
3	28,4
3,5	30,9
4	33,3
4,5	35,5
5	37,3
pressione <b>bar</b>	portata <b>L/min</b>

**Temperatura acqua:** 20°C  
**Collegamento:** DIRETTO 1/2"  
**lungh. Flessibile:** 150 cm

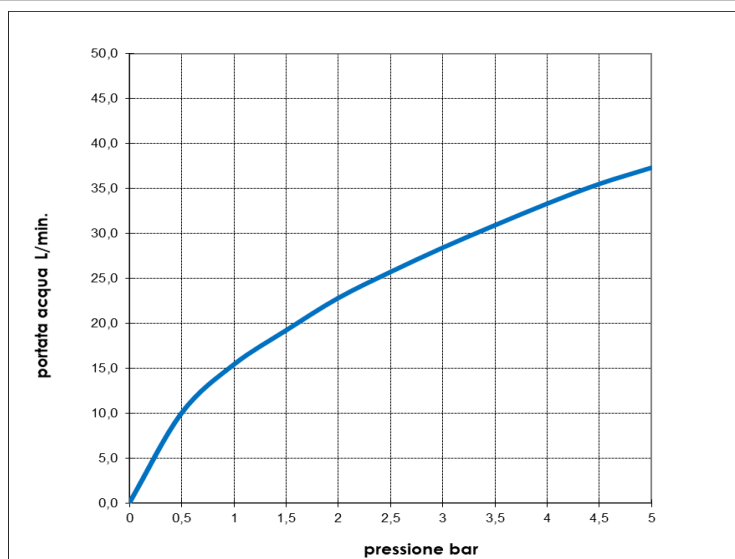

**Caratteristiche idrauliche - Hydraulic features**

	Pressione Pressure	Portata Flow rate	Solo per miscelatori termostatici Only for thermostatic mixers	
min	1 bar	<b>15 L/min</b>	Blocco di sicurezza Safety lock	--
max	5 bar	<b>37 L/min</b>	Temperatura acqua fredda Cold water temperature	--
Portata minima consigliata per buon funzionamento <i>Recommended minimum flow-rate for optimal performance</i>		n.a.	Temperatura acqua calda Hot water temperature	--

**Materiali - Materials**

**Flessibile:** PVC retinato nylon

**Raccordi:** Ghiera in ottone cromato; cono in ABS

**Guarnizioni:** EPDM

**Flexible hose:** Reinforced nylon PVC

**Threaded connections:** Knurled washer in chrome plated brass; cone in ABS

**Gaskets:** EPDM

**Certificazioni - Certifications**



**Conformità' - Conformity**

EN 1113; Chrome plating - EN 248