

# DATENBLATT/DATA SHEET

**Produkt:** MFW, MIE, MAE, MCP, ME, MHK, MK, MIC, MVC  
*Product:* MFW, MIE, MAE, MCP, ME, MHK, MK, MIC, MVC


**Produktbeschreibung:** Zubehör für MAK (Maxikanal)  
*Product description:* Accessories for MAK (Maxi trunking)

**Farben:** weiß  
*Colours:* white


**Material:** PVC-U  
*Material:* PVC-U

**Zutreffende Normen:** EN 50085-1, EN 50085-2-1  
*Relevant standards:* EN 50085-1, EN 50085-2-1


## Verfügbare Teile: [Available parts]:

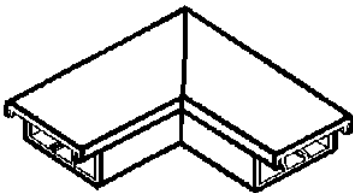


MFW  
Flachwinkel/Flat Angle




MIE  
Inneneck/Internal Corner




MAE  
Ausseneck/External Corner




MCP  
Kreuzstück/Cross Piece




ME  
Endstück/Stop End




MHK  
Kabelhalteklammer/Cable Retainer



MK  
Kuplung/Coupler



MIC  
Interne Kuplung/Internal Coupler



MVC  
Verbinder/ Coupler

Alle Angaben sind cirka Werte und beziehen sich auf genormte Prüfkörper unter Laborbedingungen. Technische Änderungen vorbehalten.

All figures refer to standardized test samples and are given to our best knowledge but without further commitment. It is Dietzel's belief that information set forth in this Data Sheet is accurate, Dietzel makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.

# DATENBLATT/DATA SHEET

## Technische Daten:

Technical Data:

	<b>Einheit, Unit</b>	<b>Wert, Value</b>
<b>Physikalische Eigenschaften, Physical properties</b>		
Spezifisches Gewicht <i>Density</i>	g/cm <sup>3</sup>	1,4
E-Modul <i>Modulus of elasticity</i>	N/mm <sup>2</sup>	3.000
Reißdehnung <i>Elongation at break</i>	%	40
Wasseraufnahme <i>Water absorption</i>	%	0,08
<b>Elektrische Eigenschaften, Electrical properties</b>		
Durchschlagsfestigkeit <i>Dielectric strength</i>	kV/mm	25
Dielektrizitätskonstante <i>Dielectric constant</i> (E 800Hz)	-	3,4
<b>Brandverhalten, Fire behaviour</b>		
nach EN 50 085 <i>acc. to EN 50 085</i>	-	Nicht flammenverbreitend Non flamepropagating
<b>Thermische Eigenschaften, Thermal properties</b>		
Temperaturbeständigkeit <i>Temperature resistance</i>	°C	+60
Kältebeständigkeit <i>Cold impact resistance</i>	°C	-25
Linearer Ausdehnungskoeffizient <i>Coefficient of linear expansion</i>	m/m/°C	0,7 x 10 <sup>-4</sup>

Alle Angaben sind cirka Werte und beziehen sich auf genormte Prüfkörper unter Laborbedingungen. Technische Änderungen vorbehalten.

All figures refer to standardized test samples and are given to our best knowledge but without further commitment. It is Dietzel's belief that information set forth in this Data Sheet is accurate, Dietzel makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.