



## 2P+E rotating multi-outlet plugs 2 and 3 side outputs with or without USB


Cat. No(s): 0 494 36/37/39 - 6 945 21/22/24



0 494 36



0 494 37



6 945 22

### 1. USE


Socket block which pivots on its axis for connection to 2P+E wall outlets.

- 3 side outputs.
- 2 side outputs + USB Type-A + USB Type-C charger for charging mobile devices such as smartphones or tablets.

### 2. RANGE

Description	French-Belgian standard		German standard	
	White/Dark Grey	Aluminium/Dark Grey	White/Dark Grey	Aluminium/Dark Grey
2P+E multi-outlet plugs with safety shutter 3 side outputs	0 494 36	-	6 945 21	-
2P+E multi-outlet plugs with safety shutter 2 x 2P+E side outputs + 1 USB Type-A + USB Type-C charging module	0 494 37	0 494 39	6 945 22	6 945 24

### 3. DIMENSIONS (mm)

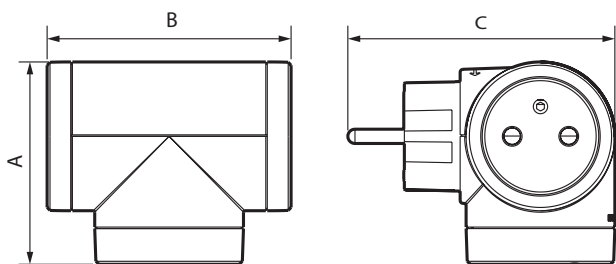

Cat. Nos	A	B	C
0 494 36	64	82	90
6 945 21	87	88	90
0 494 37/39	68	82	90
6 945 22/24	68	88	90

### 4. TECHNICAL CHARACTERISTICS

#### ■ 4.1 Mechanical characteristics

Impact tests: IK 04  
 Protection against solid/bodies and liquids: IP 20

#### ■ 4.2 Material characteristics

Plastic + thermoplastic Matt White RAL 9003 - Light Grey RAL 7024  
 Aluminium paint

Halogen-free  
 UV-resistant

#### Self-extinguishing:

750°C/30 s for insulating components holding live parts in place.  
 650°C/30 s for other insulating components.

#### ■ 4.3 Electrical characteristics

Voltage: 230 V~  
 Frequency: 50 Hz  
 Current: 16 A  
 Power: max. 3680 W

#### USB socket:

1 USB Type-A port + 1 USB Type-C port  
 5.0 V $\pm$  - 3.0 A - 15 W max.  
 Average active efficiency: 84.3%  
 Low-load efficiency (10%): 82.4%  
 Electricity consumption when not charging: 0.09 W

#### ■ 4.4 Climate characteristics

Usage temperature: -5°C to +35°C  
 Storage temperature: -20°C to +70°C

## 5. CARE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

**Caution:** Always test before using other special cleaning products.

## 6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards

See e. catalogue.