


Angled multi-outlet adapter

Cat. No(s): 0 494 04/06/08/09
 6 945 01/02/03/04

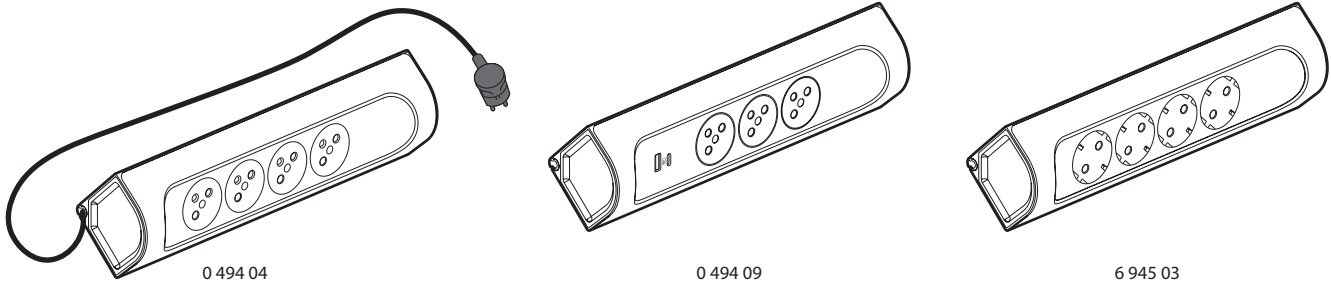


1. USE

2P+E flush multi-outlet extensions, with safety shutter, for temporary or permanent connection.
 With USB Type-A + USB Type-C charger - 15.0 W (on 3 x 2P+E multi-outlet extensions).
 Example of installation: on your kitchen work surface in a corner, horizontal or vertical with fixing points at the back of the device or with adhesive tape.
 With snap-off notches in the corner of the device for feeding the cable through on one or other side of the socket block.

2. RANGE

2P+E flush socket blocks with recesses at a 45° angle, wired and equipped with a 1 m cord fitted with a 2P+E plug (H05VVF, 3G 1.5 mm²) French-Belgian standard	White	Aluminium/White
4 x 2P+E + 1.5 mm² cable	0 494 04	-
3 x 2P+E + 1.5 mm² cable with 2 USB Type-A+C charging module	-	0 494 06
2P+E flush socket blocks with recesses at a 45° angle to be wired (1.5 mm² cross-section) French-Belgian standard	White	Aluminium/White
4 x 2P+E - to be wired	0 494 08	-
3 x 2P+E - to be wired with 2 USB Type-A+C charging module	-	0 494 09
2P+E flush socket blocks with recesses at a 45° angle, wired and equipped with a 1 m cord fitted with a 2P+E plug (H05VVF, 3G 1.5 mm²) German standard	White	Aluminium/White
4 x angled 2P+E + 1.5 mm² cable	6 945 01	-
3 x 2P+E + 1.5 mm² cable with 2 USB Type-A+C charging module	-	6 945 02
2P+E flush socket blocks with recesses at a 45° angle to be wired (1.5 mm² cross-section)	White	Aluminium/White
4 x 2P+E - to be wired	6 945 03	-
3 x 2P+E - to be wired with 2 USB Type-A+C charging module	-	6 945 04

3. DIMENSIONS (mm)

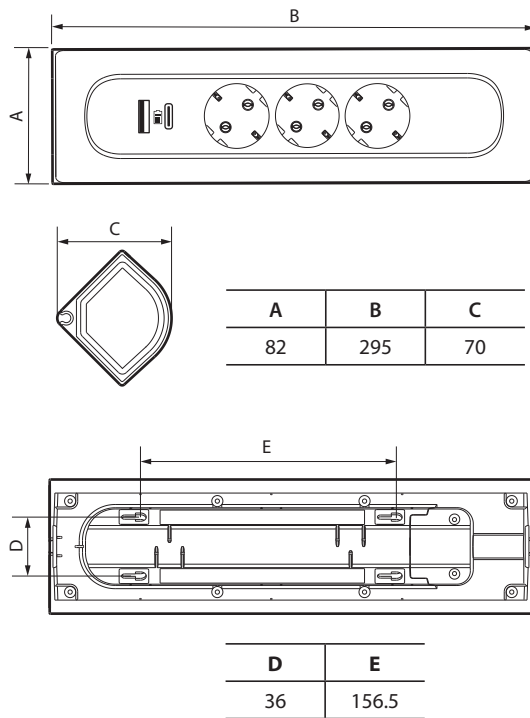


4. CONNECTION

For catalogue numbers to be wired: 0 494 08/09 - 6 945 03/04

Type of terminals: with screws
 Terminal capacity: 3 x 1.5 mm²
 Stripping length: 8 mm

5. TECHNICAL CHARACTERISTICS

■ Description of cable fixing and management

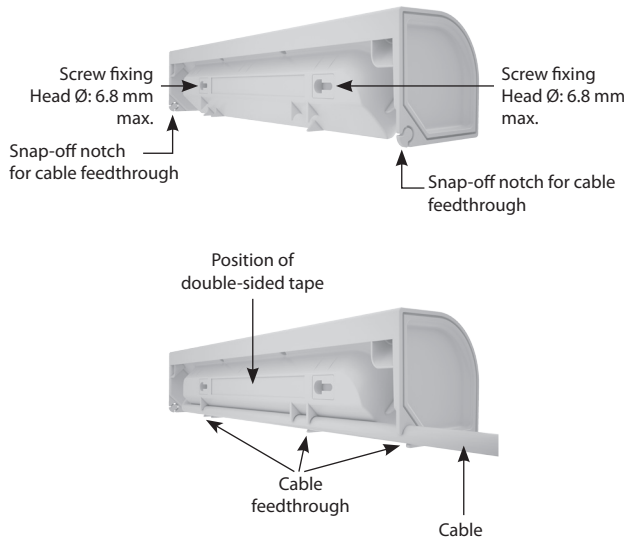

■ 5.1 Mechanical characteristics

Impact tests: IK 04

Protection against solid/bodies and liquids: IP 20

■ 5.2 Material characteristics

Plastic + thermoplastiq:

Matt White RAL 9003

Painted Aluminium

Halogen-free

UV-resistant

Self-extinguishing:

750°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

2P+E outlets:

Voltage: 230 V~

Frequency: 50 Hz

Current: 16 A

Power: 3680 W max.

USB:

1 USB Type-A port + 1 USB Type-C port

3.0 A - 5.0 V= - 15.0 W max.

Average active efficiency: 84.3%

Low-load efficiency (10%): 82.4%

Electricity consumption when not charging: 0.09 W

■ 5.4 Climate characteristics

Usage temperature: -5°C to +35°C

Storage temperature: -20°C to +70°C

6. CARE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards

See e. catalogue.