
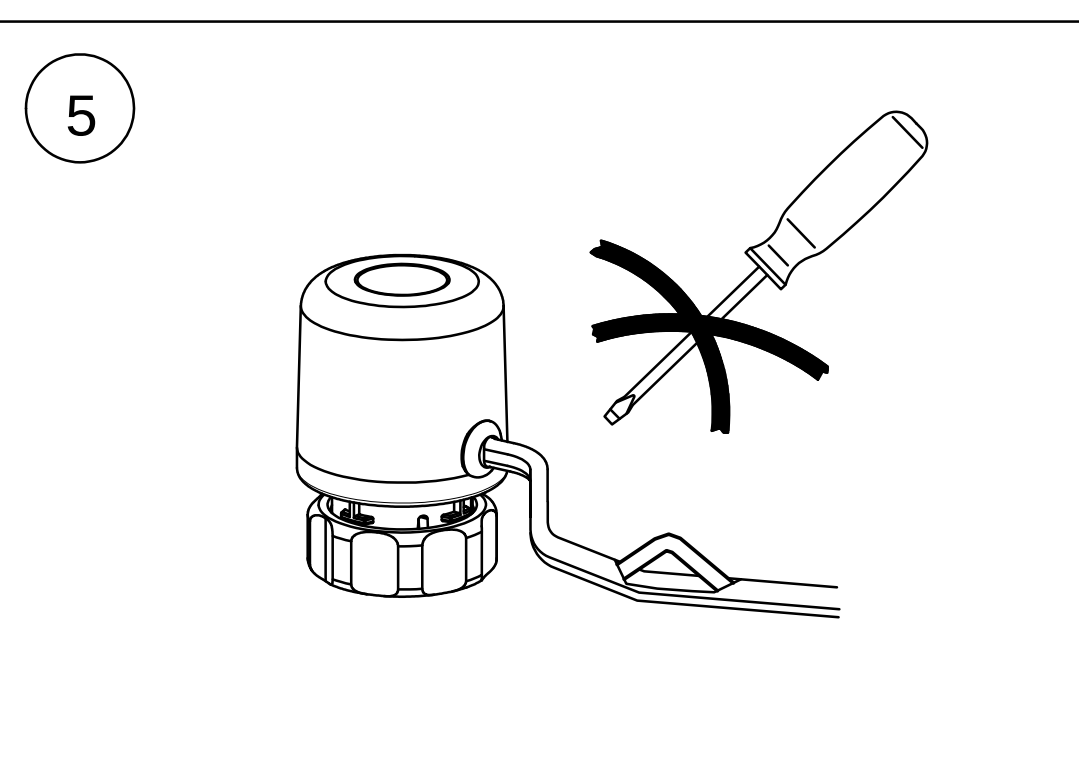
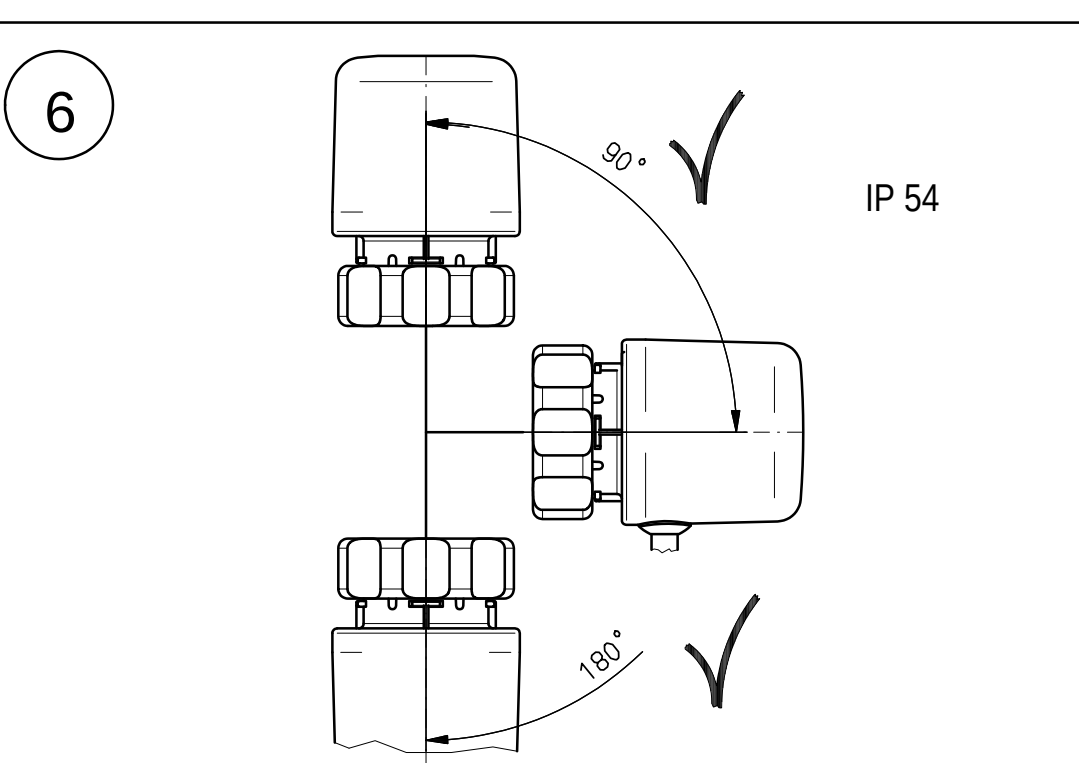
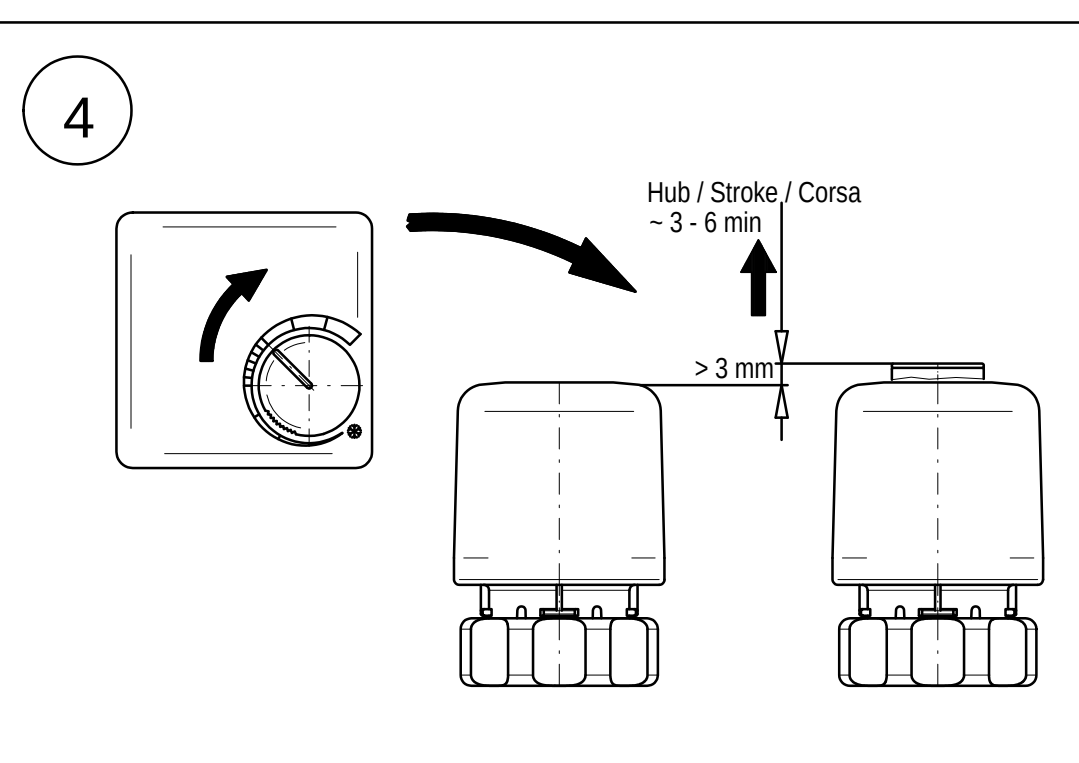
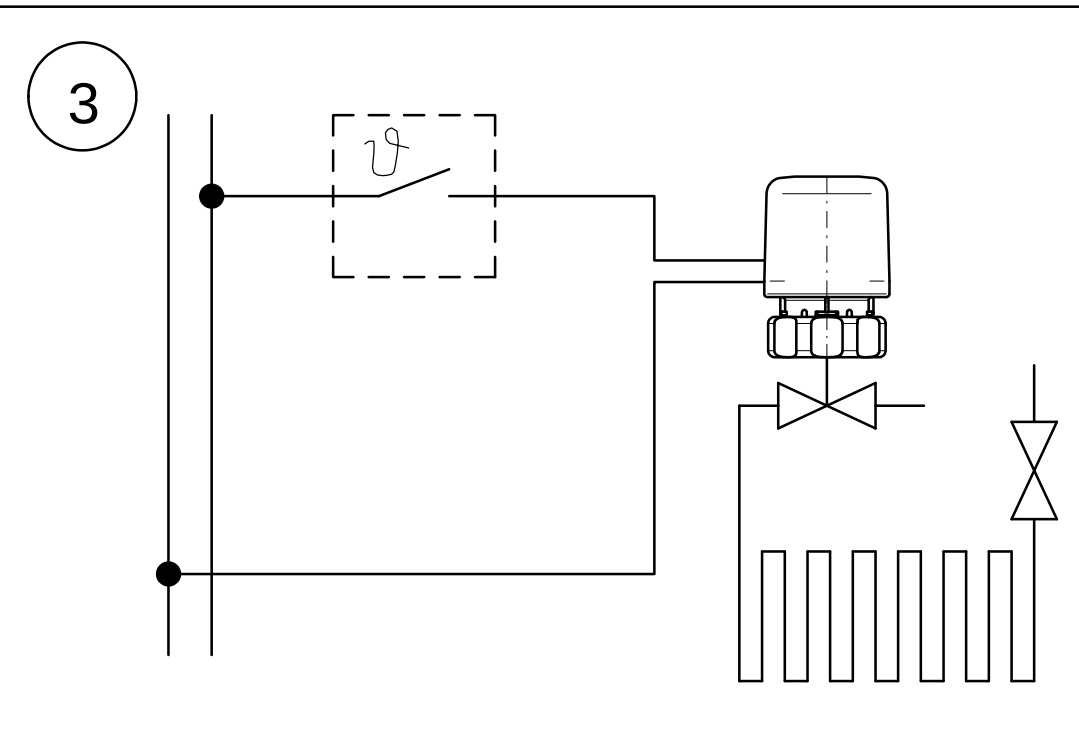
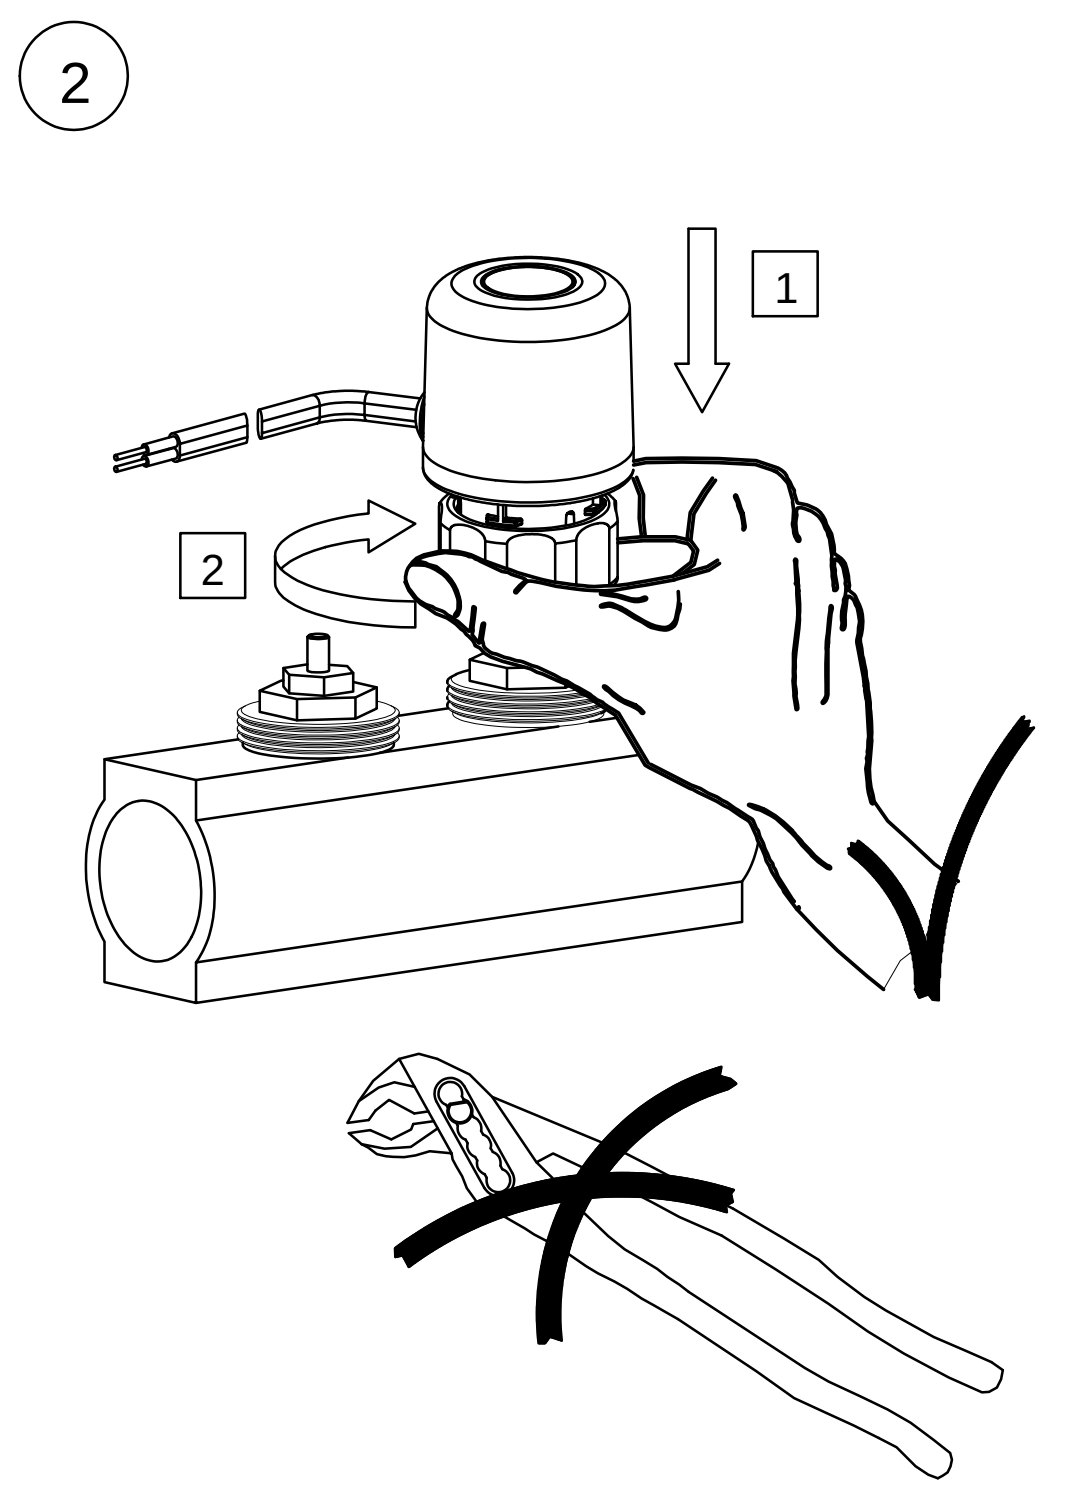


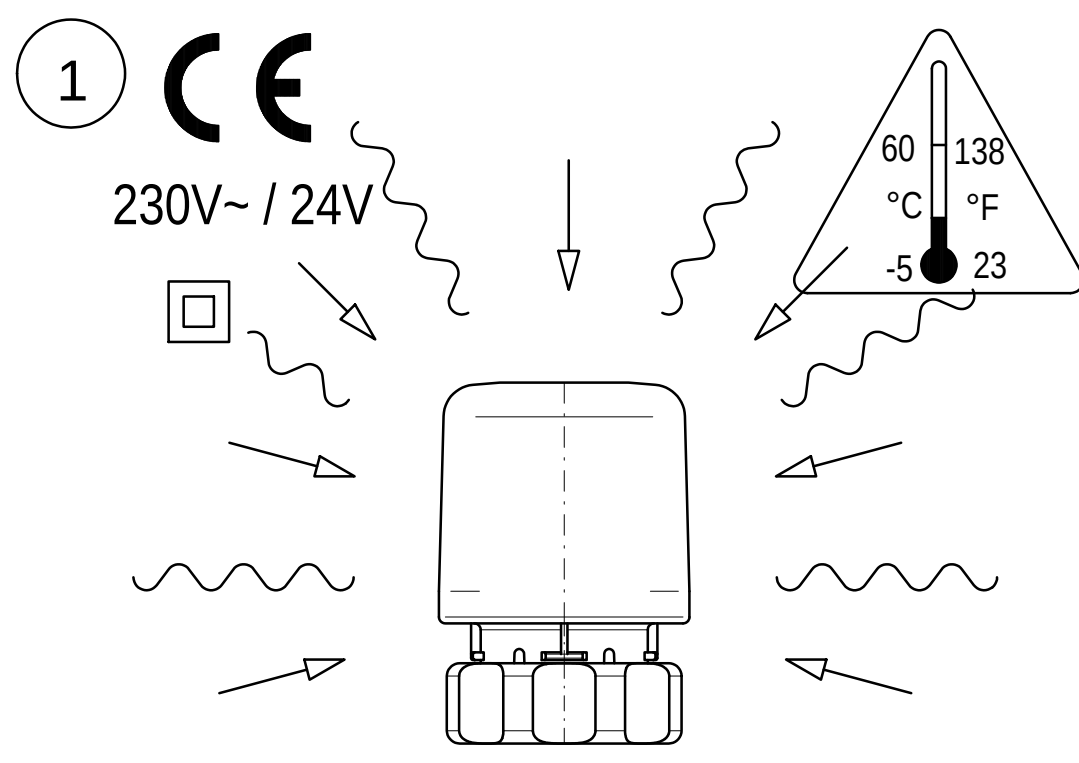

Technical specifications for the actuator:

U = 24 V ±10%

P ~ 2 W

I_{max} ~ 184 mA

I_N ~ 84 mA

CE IP 54

-5°C 60°C

F ~ 90 N

Typ: TSA 02

U = 230 V ~ ±10%

P ~ 2 W

I_{max} ~ 140 mA

I_N ~ 9 mA

CE IP 54

-5°C 60°C


F ~ 90 N

Typ: TSA 02


1




230V~ / 24V

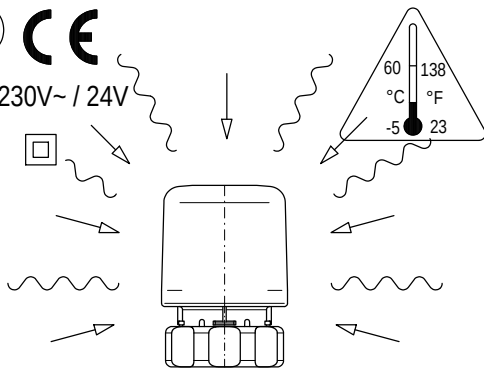


2

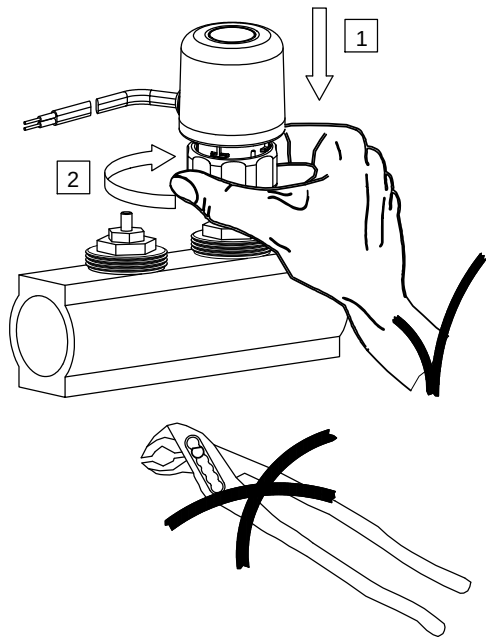


3

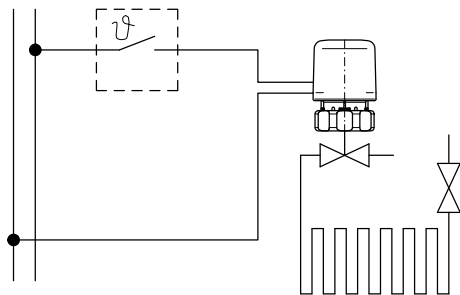

4


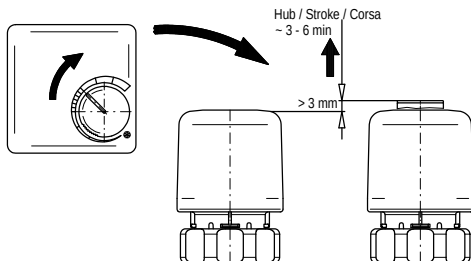


6

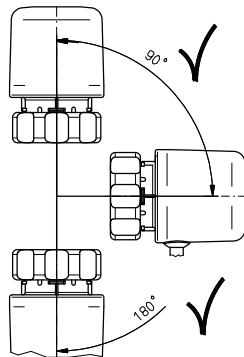


IP 54

5



U = 24 V ±10%
P ~ 2 W
I_{max} ~ 184 mA
I_N ~ 84 mA
CE IP 54 □
-5°C ... 60°C
F ~ 90 N
Typ: TSA 02 ▲



U = 230 V ~ ±10%
P ~ 2 W
I_{max} ~ 140 mA
I_N ~ 9 mA
CE IP 54 □
-5°C ... 60°C
F ~ 90 N
Typ: TSA 02 ▲