

# **Product Description:**

#### Rapid SL for wash basin

# Standard Specification:

for single hole installation

### 1.13 m installation height

for on-the-wall installations or studded walls powder coated steel frame, self-supporting for dry-cladding, completely pre-assembled with fixed connections quick adjustment, lockable fixing material

TÜV approved

wash basin fixing bolts M10 with fixing device for ceramic variable distance of fixing bolts

HT-outlet bend Ø 50 mm


seal Ø 32 mm

2 noise protected fitting connections ½"

without accessories for on-the-wall installation

#### Color:

□ 38554001

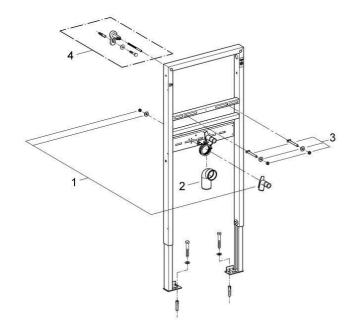

Po	snr. Prod. description	Order-nr.	Units per package
1	Fitting connection	42944000	1
2	Outlet elbow 2"	42943000	1
2.	Holder for outlet elbow	42236000	1
3	Threaded bolt	42247000	1
	Optional accessories		
4	Rapid SL wall brackets	3855800M	1

about:blank 1/1