


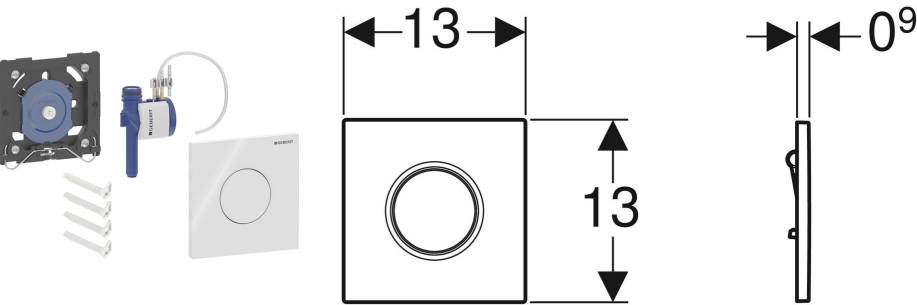

Example image

APPLICATION PURPOSES

- For manual flush actuation of urinals

CHARACTERISTICS

- Actuator plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set

- Tap group II in accordance with DIN 4109

TECHNICAL DATA

Flow pressure	1–8 bar
Test pressure, water max.	16 bar
Test pressure, air / inert gas max.	3 bar
Actuation force max.	12 N
Flow rate at 1 bar without flow limiter	0.3 l/s

Flow rate at 1 bar with flow limiter	0.18 l/s
Flush time, adjustment range	4 / 8 / 12 s
Button shape	round

SCOPE OF DELIVERY

- Type 01 actuator plate, round
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Product material
116.011.11.5	white	Plastic
116.011.21.5	chrom / glossy	Plastic
116.011.DW.5 New	tiefschwarz	Plastic

<i>Art. no.</i>	<i>Colour / surface</i>	<i>Product material</i>
116.011.JQ.5	chrom / matt, easy-to-clean-beschichtet	Plastic

New article available from 01.07.2025