

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60150959

Articol:

EVOPLUS D 60/250.40 M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid -10 °C
Temperatura max. fluid 110 °C
EEI : ≤ 0,22

Presiune minima la nivelul apei:

Temperatura : °C 90 - 100
Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit :
Inaltime de pompare :
Fluid pompat (%) :
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :
Inaltime de pompare :

Materiale



Corp pompa Cast iron 250 UNI ISO 185 - CTF
Rotor Tecnopolimer
Arbore motor Alumina
Inel de etansare EPDM
Carcasa motorului Aluminu turnat la cald
Flansa de inchidere Otel inox
Suport inel de echilibrare EPDM

Date motor

Marca : DAB
Putere absorbita P1 2 X 0.1 kW
Tensiune nominala : 1~ 220-240 V 50 Hz
Curent nominal : 2 X 0.75 A
Grad de protectie: IP 44

Curve tolerance according to ISO 9906

Number of working motors : 2

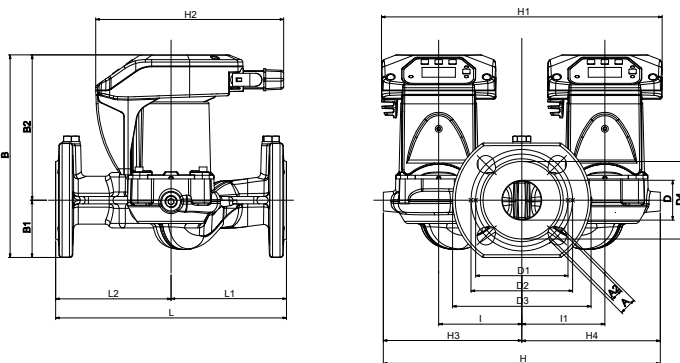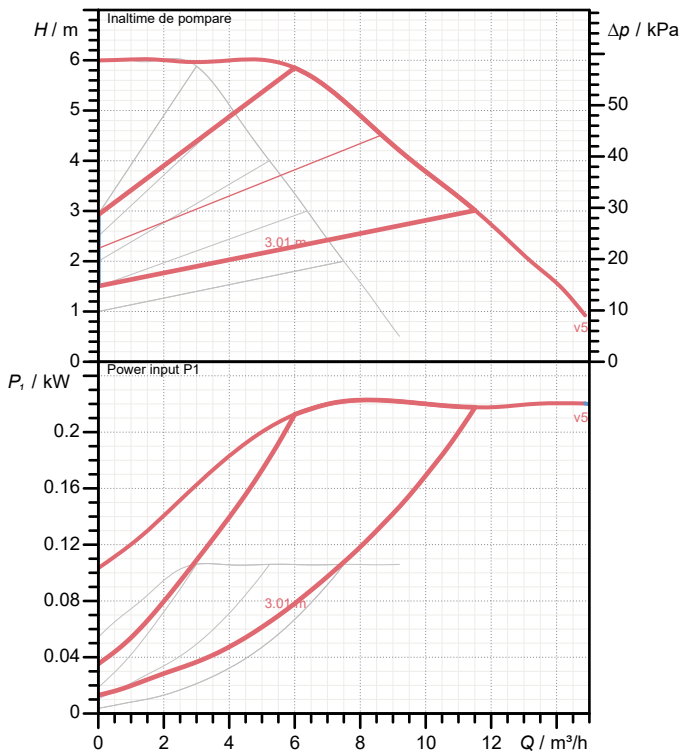

Dimensiuni de gabarit mm

A	19	D1	100	H2	204	L1	125
A2	14	D2	110	H3	150	L2	125
B	220	D3	150	H4	150		
B1	62	D4	84	I	90		
B2	158	H	300	I1	90		
D	43	H1	304	L	250		

Masa 14.2 kg

Racorduri pompa:

Partea cu aspiratia: DN 40 / PN6, PN10, PN16
Partea cu refularea: DN 40 / PN6, PN10, PN16

Destinatar


Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 60/250.40 M

Number of working motors : 2

Curve tolerance according to ISO 9906

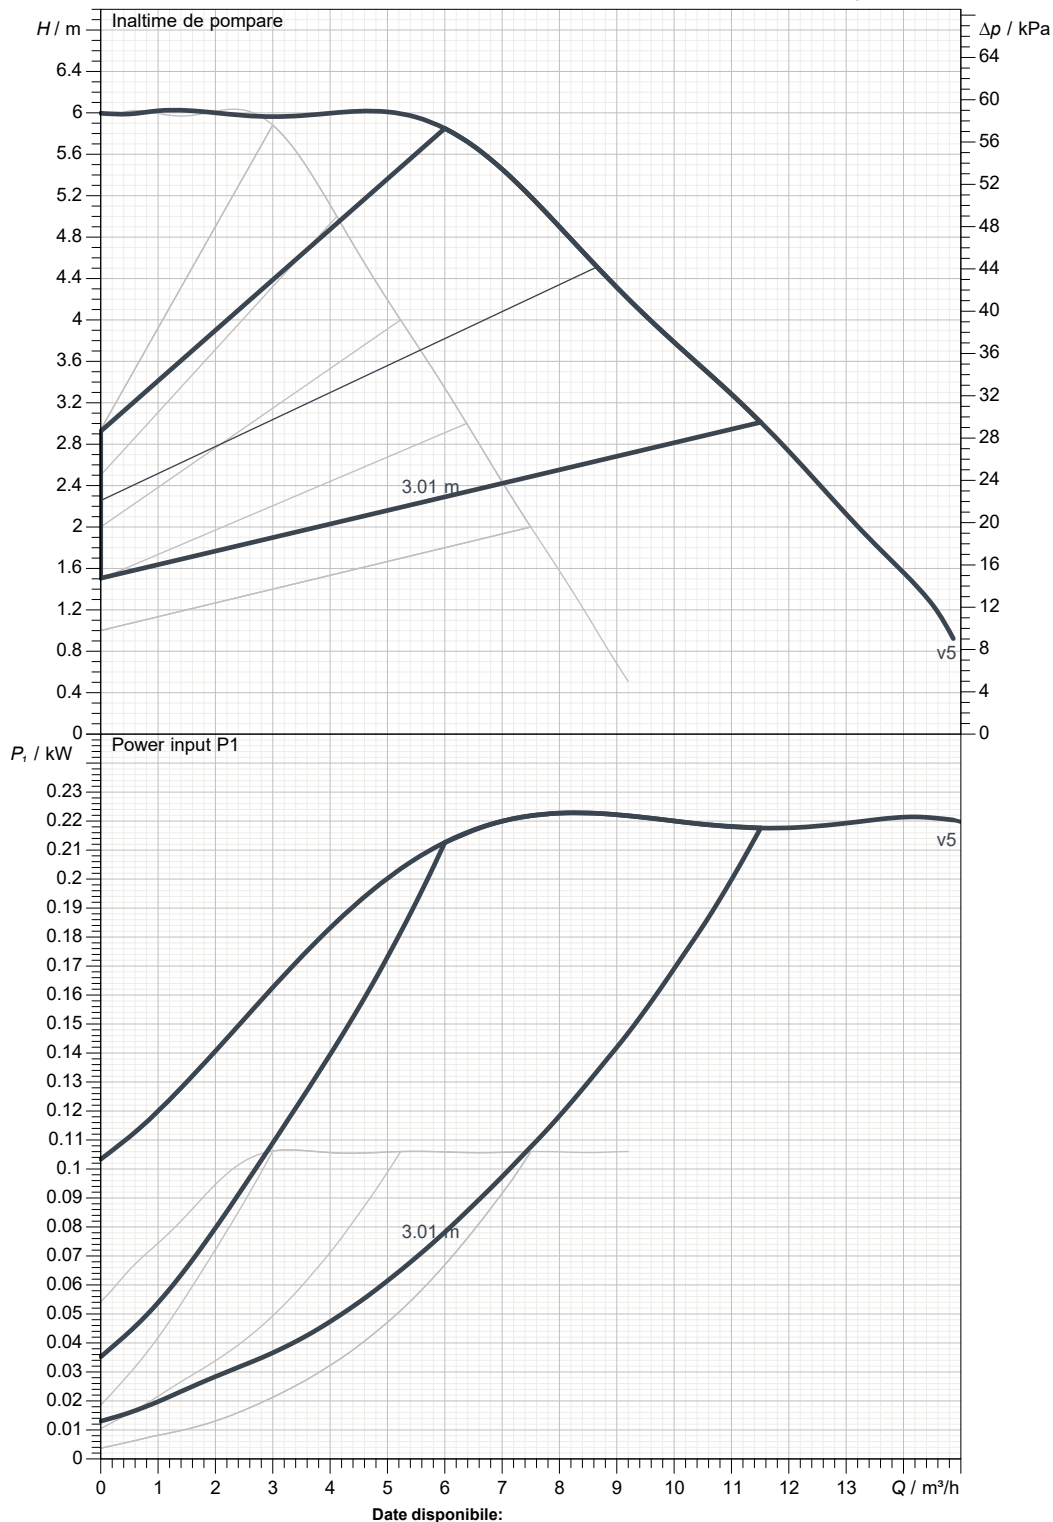

Date disponibile:

Partea cu aspiratia:

DN 40

PN6, PN10, PN16

Partea cu refularea:

DN 40

PN6, PN10, PN16

Debit :

Înăltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE



DESEN DIMENSIONAL

10/27/2021

Pagina 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 60/250.40 M

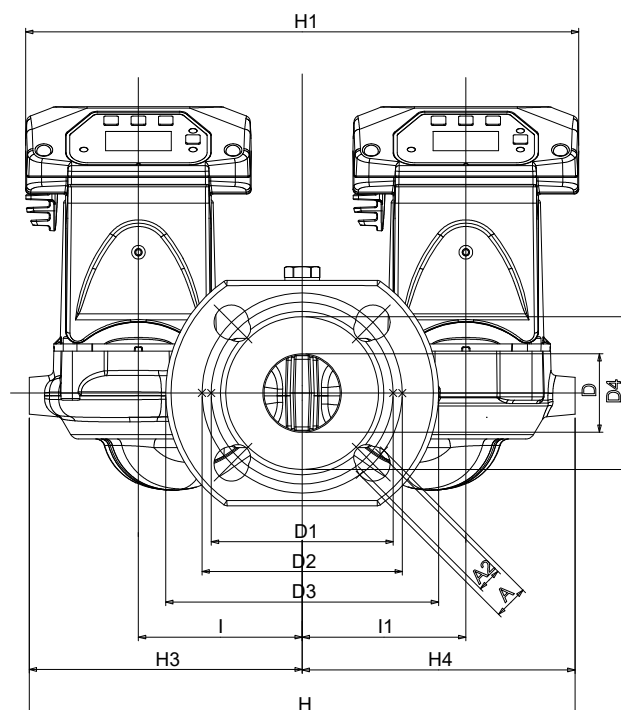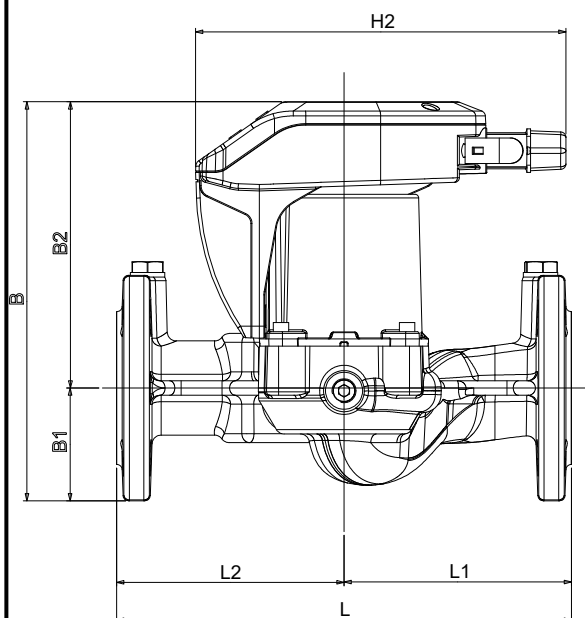

Dimensiuni in mm

Racorduri pompa:

1	A	19	H2	204			
2	A2	14	H3	150			
3	B	220	H4	150			Aspiratie
4	B1	62	I	90			DN 40
5	B2	158	I1	90			PN6, PN10, PN16
6	D	43	L	250			
7	D1	100	L1	125			Refulare
8	D2	110	L2	125			DN 40
9	D3	150					PN6, PN10, PN16
10	D4	84					
11	H	300					
12	H1	304					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE