

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60151006

Articol:

EVOPLUS D 150/250.40 M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid -10 °C
Temperatura max. fluid 110 °C
EEI : ≤ 0,20

Presiune minima la nivelul apei:

Temperatura : °C 90 - 100
Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit :
Inaltime de pompare :
Fluid pompat (%) :
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vasozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :
Inaltime de pompare :

Materiale



Corp pompa Cast iron 250 UNI ISO 185 - CTF
Rotor Tecnopolimer
Arbore motor Otel inox
Inel de etansare EPDM
Carcasa motorului Aluminiu turnat la cald
Flansa de inchidere Otel inox
Suport inel de echilibrare Otel inox

Date motor

Marca : DAB
Putere absorbita P1 2 X 0.61 kW
Tensiune nominala : 1~ 220-240 V 50 Hz
Curent nominal : 2 X 2.9 A
Grad de protectie: IP 44

Curve tolerance according to ISO 9906

Number of working motors : 2

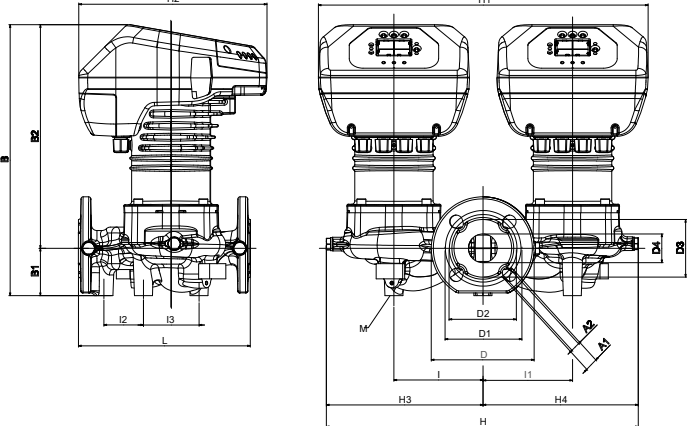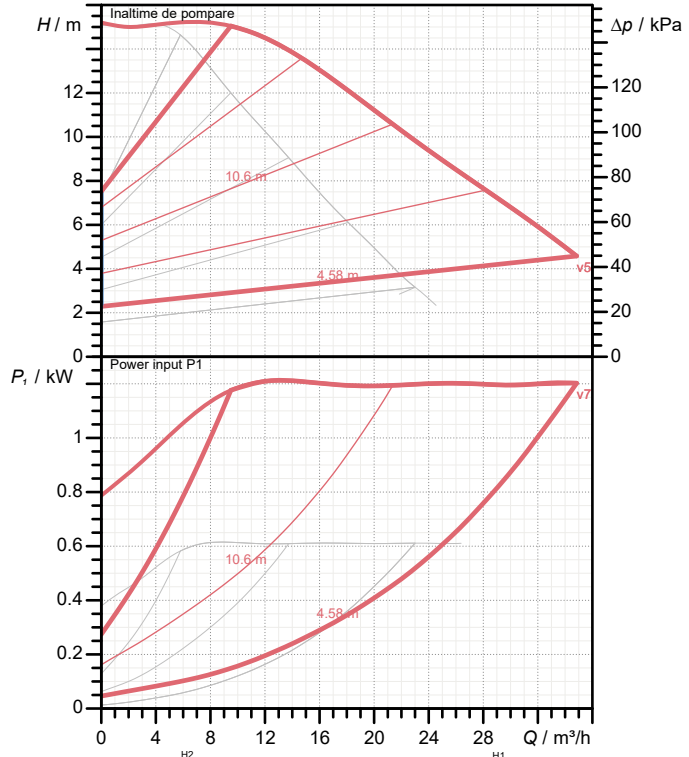

Dimensiuni de gabarit mm

| | | | | | | | |
|----|-----|----|-----|----|-----|----|-----|
| A1 | 19 | D1 | 110 | H2 | 274 | I3 | 81 |
| A2 | 14 | D2 | 100 | H3 | 228 | L | 250 |
| B | 395 | D3 | 84 | H4 | 226 | M | M12 |
| B1 | 69 | D4 | 42 | I | 130 | | |
| B2 | 326 | H | 454 | I1 | 130 | | |
| D | 150 | H1 | 480 | I2 | 58 | | |

Masa 38.8 kg

Racorduri pompa:

Partea cu aspiratia: DN 40 / PN6, PN10, PN16
Partea cu refularea: DN 40 / PN6, PN10, PN16

Destinatari


Expeditor

 Firma
 Referinta
 Adresa
 Phone
 Fax
 E-mail

EVOPLUS D 150/250.40 M

Number of working motors : 2

Curve tolerance according to ISO 9906

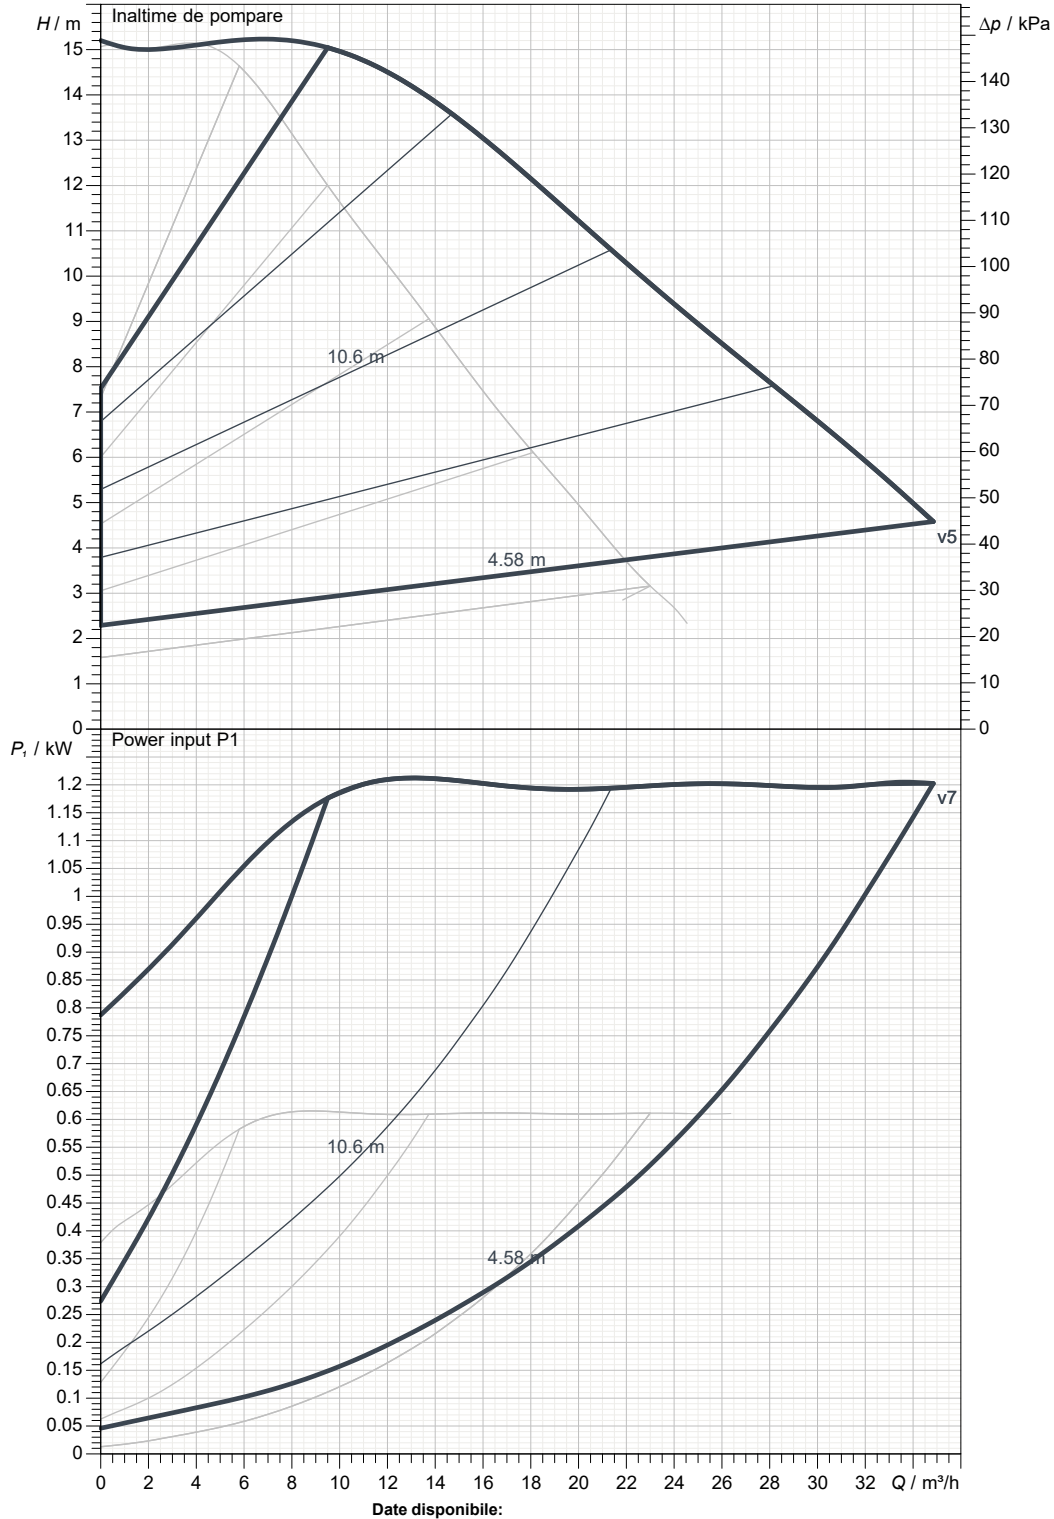

Date disponibile:

 Partea cu aspiratia:
 DN 40
 PN6, PN10, PN16

 Partea cu refularea:
 DN 40
 PN6, PN10, PN16

Debit :

Înaltime de pompare :

 Viteza nominala:
 2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE



DESEN DIMENSIONAL

07/30/2021

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 150/250.40 M

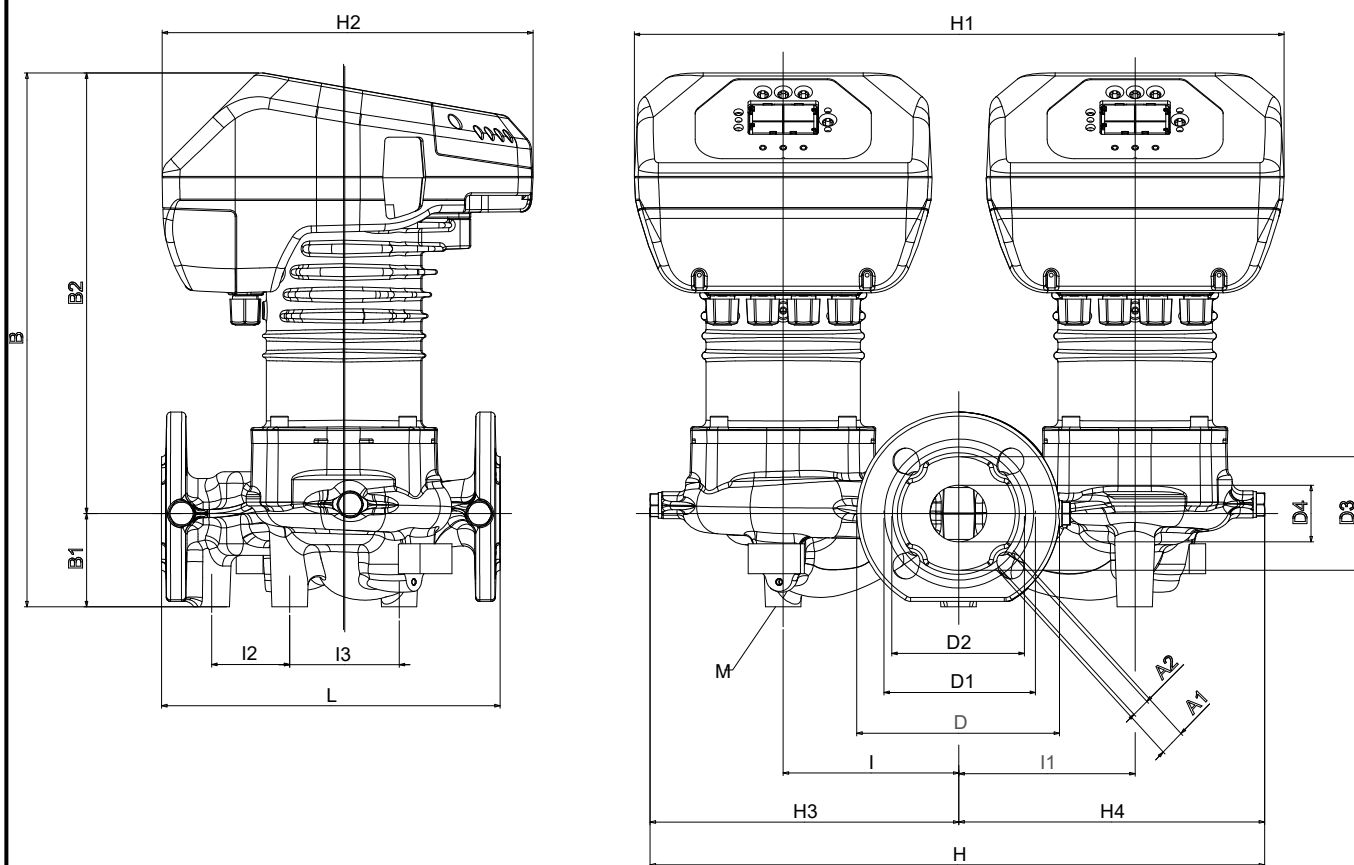

Dimensiuni in mm

Racorduri pompa:

| | | | | | | | |
|----|----|-----|----|-----|--|--|-----------------|
| 1 | A1 | 19 | H2 | 274 | | | |
| 2 | A2 | 14 | H3 | 228 | | | Aspiratie |
| 3 | B | 395 | H4 | 226 | | | DN 40 |
| 4 | B1 | 69 | I | 130 | | | PN6, PN10, PN16 |
| 5 | B2 | 326 | I1 | 130 | | | |
| 6 | D | 150 | I2 | 58 | | | |
| 7 | D1 | 110 | I3 | 81 | | | Refulare |
| 8 | D2 | 100 | L | 250 | | | DN 40 |
| 9 | D3 | 84 | M | M12 | | | PN6, PN10, PN16 |
| 10 | D4 | 42 | | | | | |
| 11 | H | 454 | | | | | |
| 12 | H1 | 480 | | | | | |

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER

ISSUE_DATE