

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol :

60220687

Customer pos. no.:

Articol:

Esybox Pop GAS 1x220-240 50/60 Schuko

Date pompa

Max working pressure 600 kPa
Temperatura min. fluid 5 °C
Temperatura max. fluid 50 °C
Temperatura max. ambianta 50 °C

Date de functionare cerute

Debit :
Înăltime de pompare :
Fluid pompat : Apă
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa


Materiale

Motor liner Otel inox AISI 304
Rotor Tecnopolimer

Date motor


Max. Power input P1 : 0.3 kW
Viteza nominala: 4700 1/min
Tensiune nominala : 1~ 220-240 V 50 Hz
Curent nominal : 1.5 A
Grad de protecție: IP X5

Curve tolerance according to ISO 9906

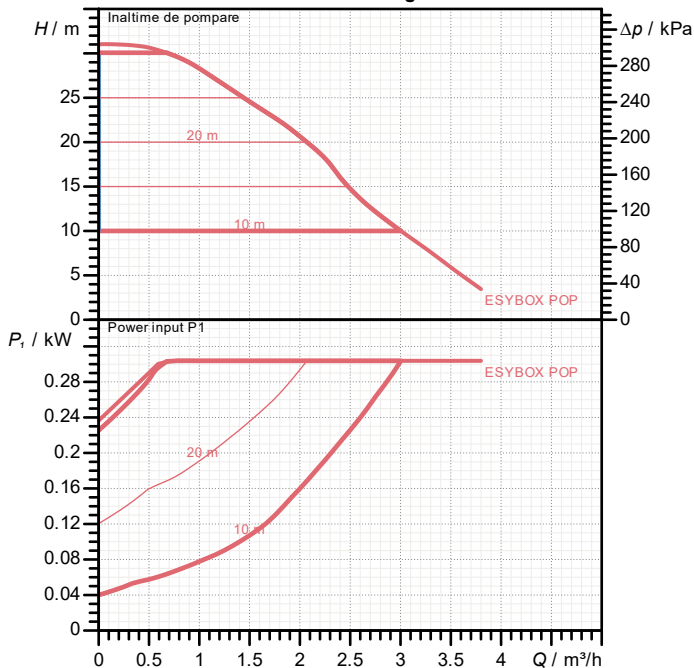

Date disponibile:

Debit :
Înăltime de pompare :

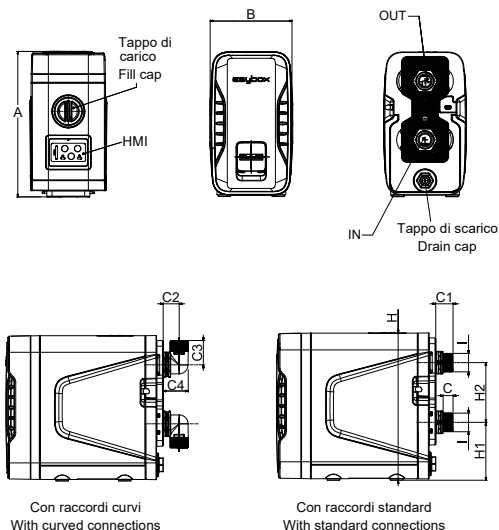

Dimensiuni de gabarit mm

A	226.5	C4	36.2	I Ø	3/4"		
B	120.3	DNA	3/4"				
C	14	DNM	3/4"				
C1	24.7	H	209.3				
C2	23	H1	82.3				
C3	35	H2	85				

Masa 4.4 kg

Racorduri pompa:


Partea cu aspiratia: 3/4 " / 600 kPa
Partea cu refularea: 3/4 " / 600 kPa

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Esybox Pop GAS 1x220-240 50/60 Schuko

Curve tolerance according to ISO 9906

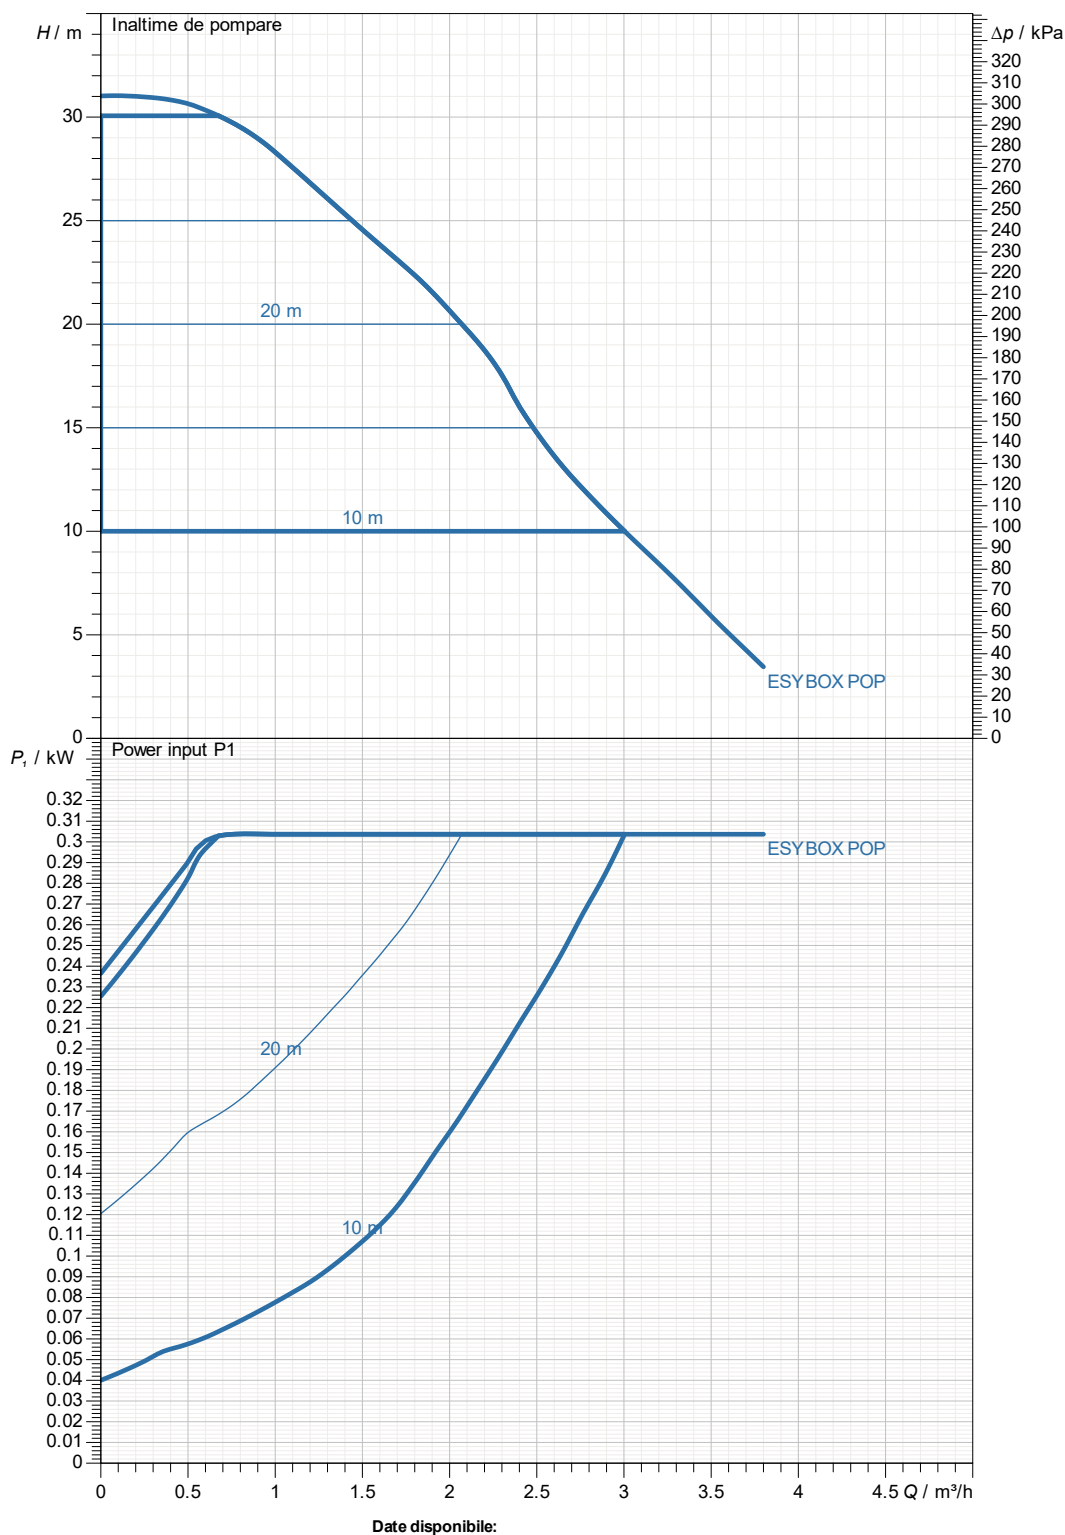

Date disponibile:

Partea cu aspiratia:

3/4 "

600 kPa

Partea cu refularea:

3/4 "

600 kPa

Debit :

Înăltime de pompare :

Viteza nominala:

4700 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_



ISSUE_DATE

02/23/2026


Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Esybox Pop GAS 1x220-240 50/60 Schuko

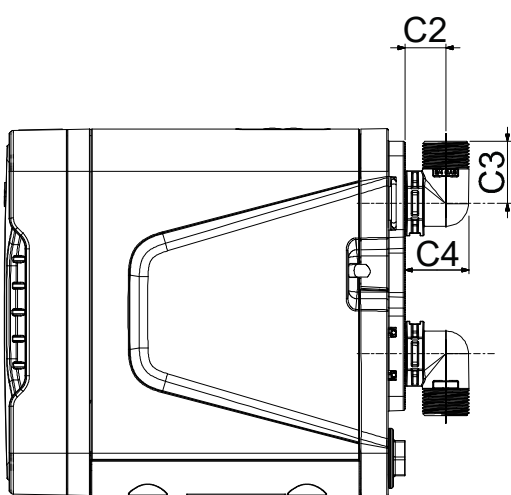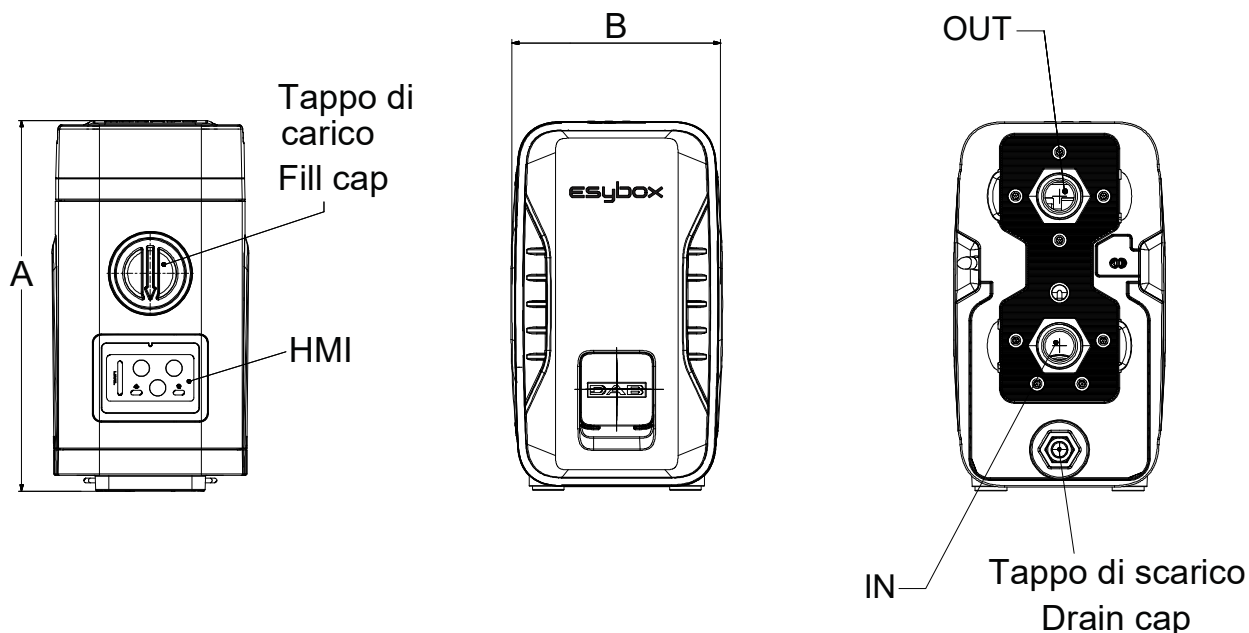

Con raccordi curvi
With curved connections

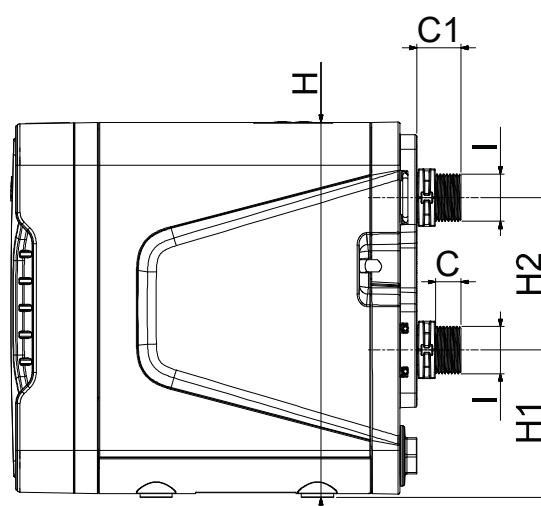

Con raccordi standard
With standard connections

Dimensioni in mm						Raccordi pompa:
1	A	226.5	1 Ø	3/4"		Aspiratie 3/4 " 600 kPa
2	B	120.3				
3	C	14				
4	C1	24.7				
5	C2	23				Refulare 3/4 " 600 kPa
6	C3	35				
7	C4	36.2				
8	DNA	3/4"				
9	DNM	3/4"				
10	H	209.3				
11	H1	82.3				
12	H2	85				
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID		OWNER_	ISSUE_DATE 02/23/2026