
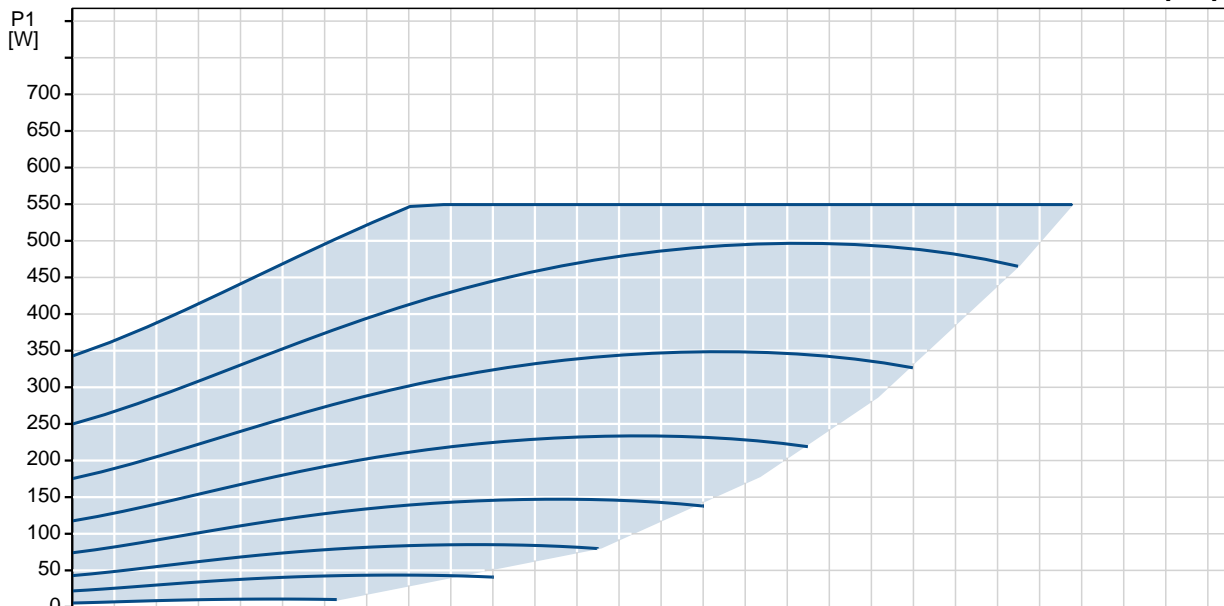


98562862 SCALA2 3-45 50 Hz

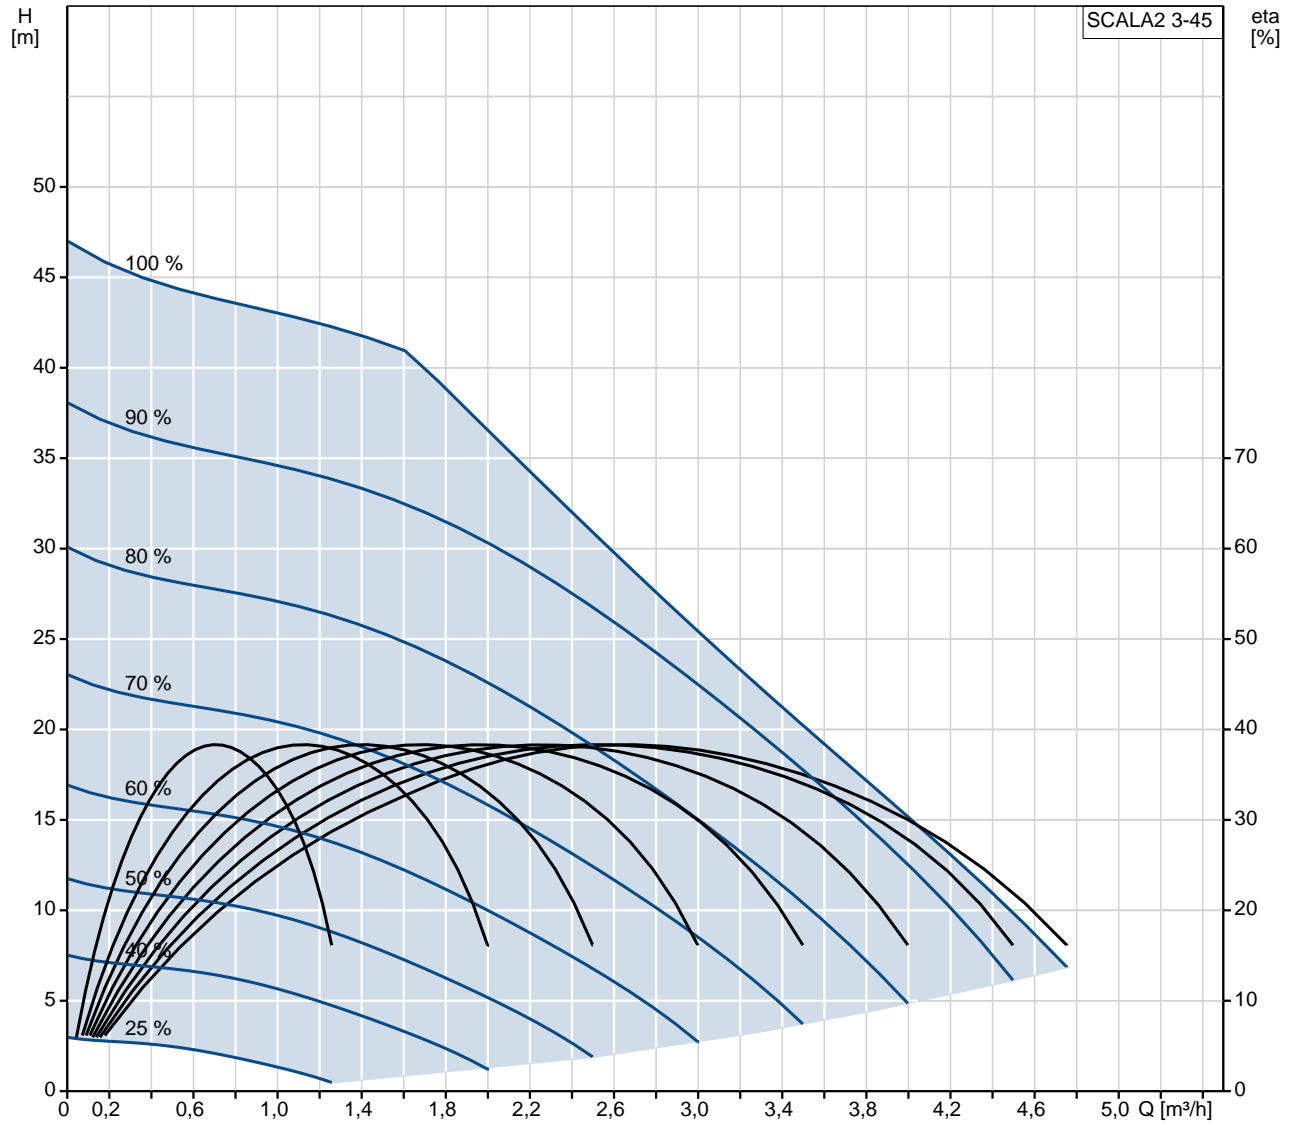

Descriere	Valori i tipuri
-----------	-----------------

Informa ii generale:

Nume produs::	SCALA2 3-45 A
Nr. produs::	98562862
Numărul EAN::	5711497234216
Pre :	La cerere

Technical:

Debit nominal:	3 m ³ /h
În l ime de pompare nominal :	27 m
În l ime de pompare max.:	45 m
etan are primar :	CARBON/CERAMIC
Approvals on nameplate:	CE,VDE
Approvals for drinking water:	WRAS,ACS
Toleran a curbelor:	ISO9906:2012 3B
Model:	A

Materials:

Corpul pompei (stator):	NORYL FE1630PW PPE+PS-GS30
Rotor:	NORYL FE1630PW PPE+PS-GS30
Cod material:	A

Instala ie:

Gama temperaturii ambientale:	0 .. 55 °C
Presiune de func ionare maxim :	10 bar
Maximum permissible inlet pressure:	6 bar
Racordarea pompei la instala ie:	G 1 Composite

Liquid:




Lichide pompate:	Ap
Gama temperaturii lichidului:	0 .. 45 °C
Q_ OpFluidTemp:	20 °C
Densitate:	998.2 kg/m ³

Electrical data:


Puterea de intarare - P1:	550 W
Frecven a re elei electrice:	50 Hz
Tensiune nominal :	1 x 200-240 V
Curent nominal:	2.8 A
Grad de protec ie (IEC 34-5):	IPX4D
Clas de izolare (IEC 85):	F
Lungimea cablului:	2 m
Power plug:	Type E/F (CEE7/7)

Others:

Greutate net :	10 kg
Greutate brut :	12.8 kg
Volum de transport:	0.044 m ³
Storage temperature range:	-40 .. 70 °C

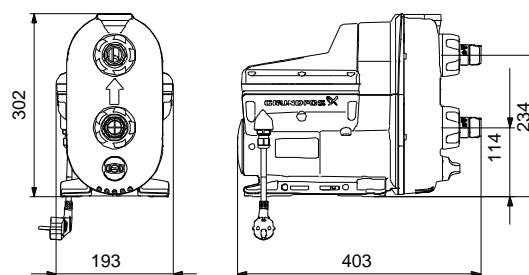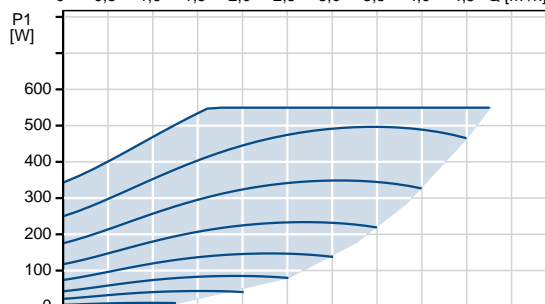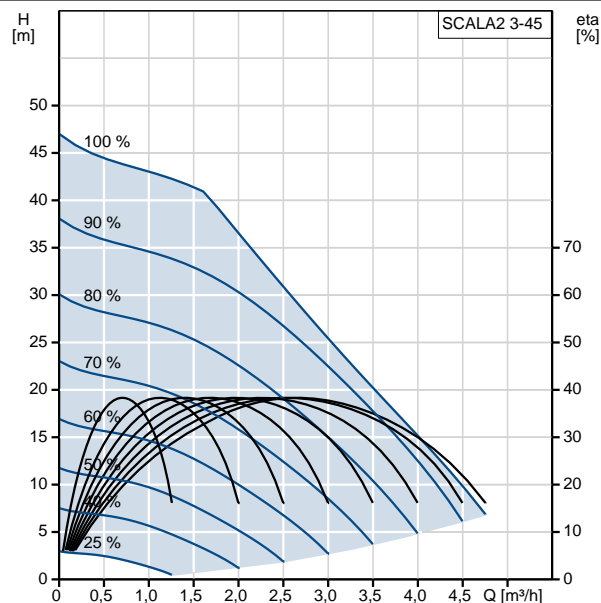

98562862 SCALA2 3-45 50 Hz

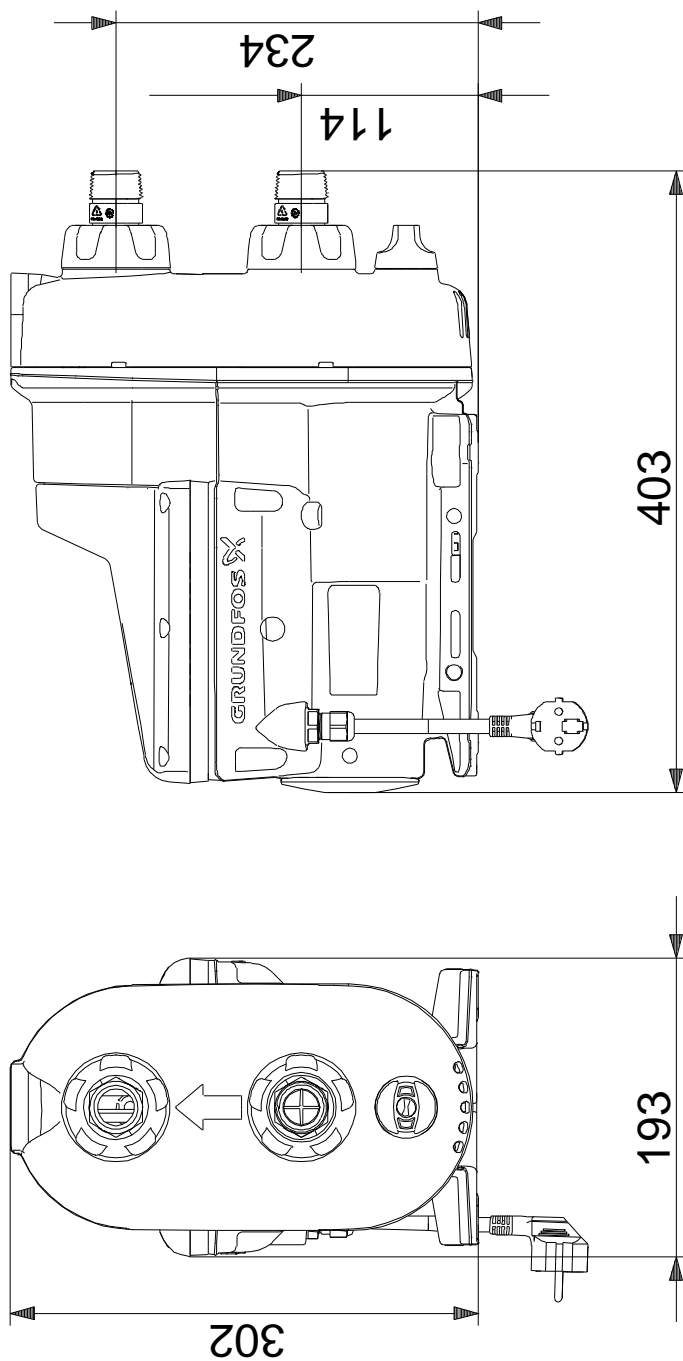

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.