

Receiver

Society
Reference
Address
Phone
Fax
E-mail

From

Item n° :

60185581

Model :

GENIX WL 130

Pump data

Min. fluid temperature :	0 °C
Max. fluid temperature :	50 °C
Max. Ambient temperature :	25 °C
Min. Temperature operating :	5 °C
Max Flow :	6.9 m³/h
Max. Head :	8 m
Max. Head (EN12050-3) :	6 m

Requested data

Flow :	
Head :	
Fluid :	Water
Fluid Temperature :	20 °C
Density :	998.3 kg/m³
Kinematic viscosity :	1.005 mm²/s
Vapor pressure :	2.34 kPa

Hydraulic data (duty point)

Flow :
Head :



Materials

Impeller	Polypropylene 30% fiber glass
Tank	Polypropylene 30% Barium
Shaft	Stainless steel
Cover	Stainless steel
Soundproofing (COMFORT)	Polypropylene 70% Barium
Grinder	AISI 304/420
OR ring	NBR

Motor data

Motor brand :	DAB	50 Hz
Nominal power P2 :	0.32 kW	
Rated speed :	2900 1/min	
Rated voltage :	1~ 230 V	
Nominal current :	2.3 A	
Degree of protection :	IP 44	

Curve tolerance according to ISO 9906

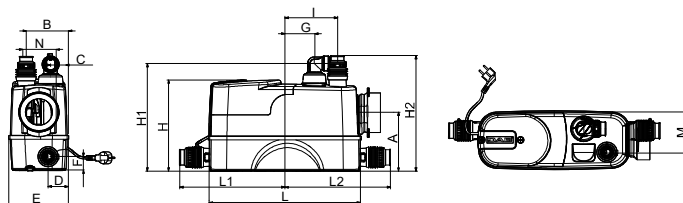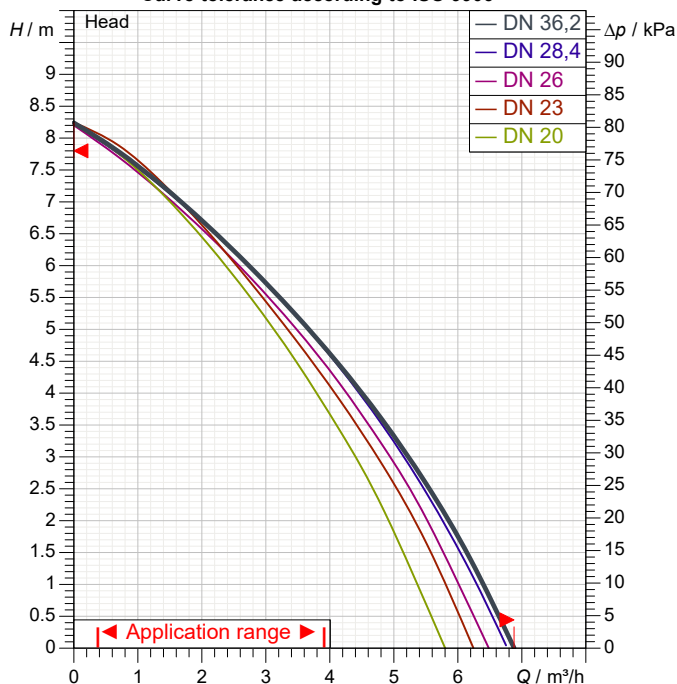

Weight : 10.3 kg

Dimensions in mm

A	183	G	178	L1	322		
B	118	H	277	L2	307		
C	45	H1	323	M	118		
D	60	H2	351	N	87		
E	178	I	170				
F	42	L	456				

Pump connection

DN 22/25/28/32/36/40


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

GENIX WL 130

Curve tolerance according to ISO 9906

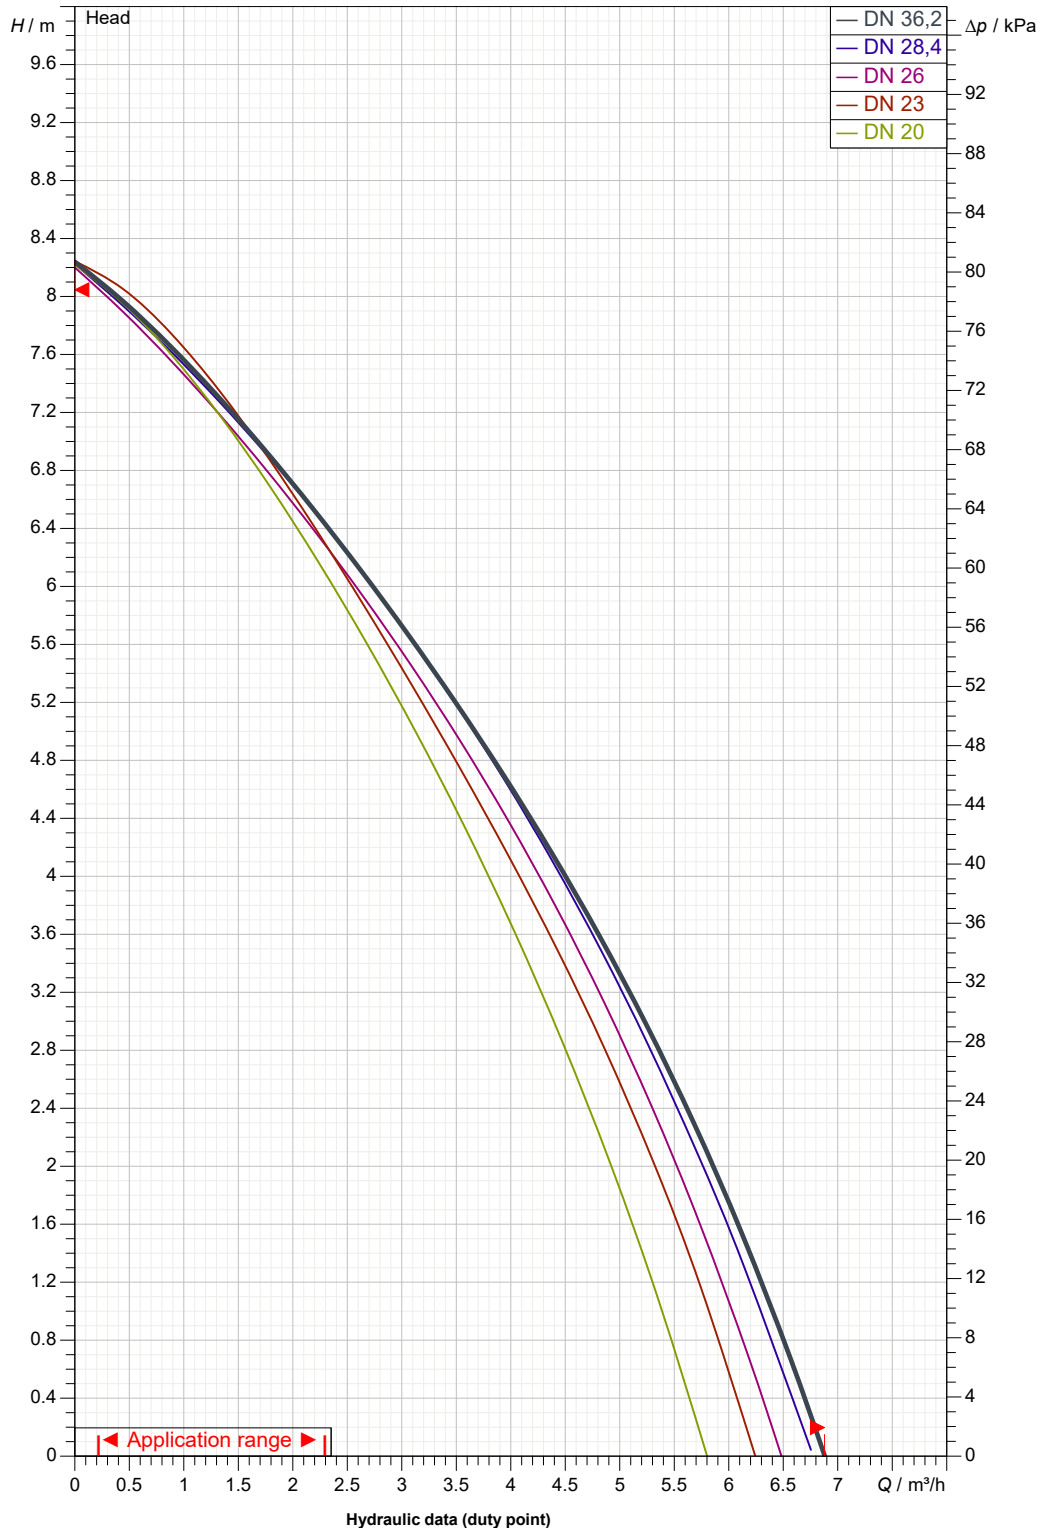

Suction side :

Discharge side :

Flow :

Head :

Rated speed :
2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IL

OWNER_

ISSUE_DATE

