

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60209373H

Customer pos. no.:

Model :

Divertron 900 GAS 1x230 50 15m Schuko

Pump data

Pressure rating :

Min. fluid temperature :

0 °C

Max. fluid temperature :

40 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid :

Water

Fluid Temperature :

20 °C

Density :

998,3 kg/m³

Kinematic viscosity :

1,005 mm²/s

Vapor pressure :

0,33938 psi

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body

Technopolymer

Impeller

Technopolymer/AISI 304

Diffuser

Technopolymer

O-Ring

EPDM

Base

Technopolymer



Motor shaft

Stainless Steel AISI 416

Motor top body

Stainless Steel AISI 304

Curve tolerance according to ISO 9906

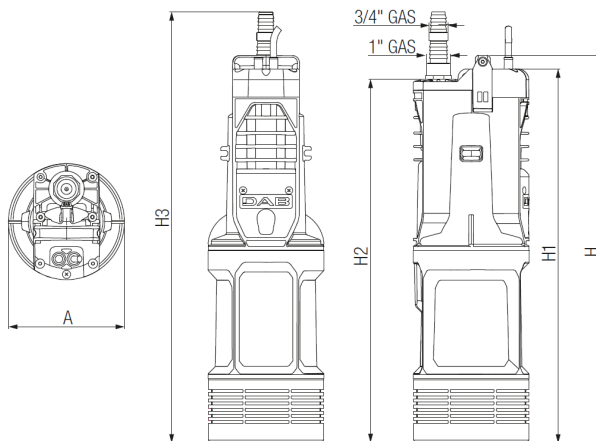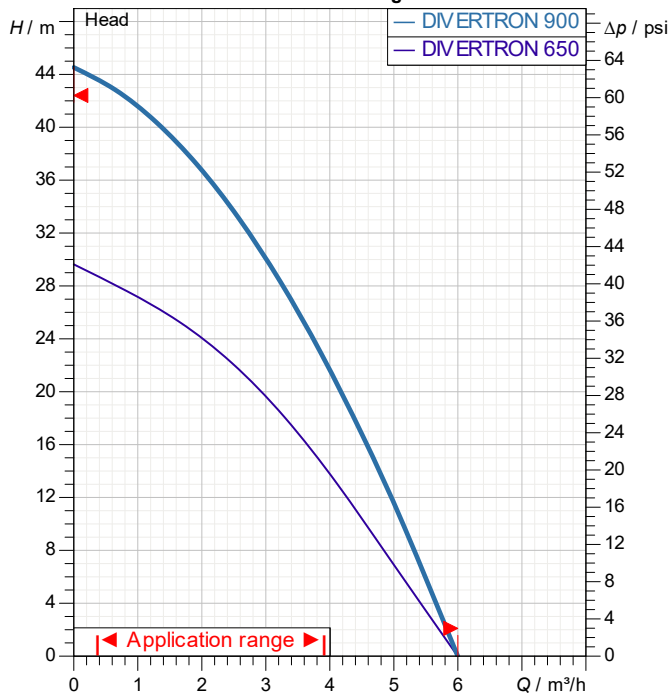

Motor data

Motor brand :

DAB

Nominal power P2 :

0,56 kW

Rated voltage :

1~ 220-240 V

Nominal current :

4,2 A

Number of poles :

2

Rated speed :

2.800 1/min

Degree of protection :

IP 68

50 Hz

Weight :

11 kg

Dimensions in

mm

A	160				
H	536				
H1	517				
H2	503				
H3	596				

Pump connection

Suction side :

/

Discharge side :

1" G


/ --

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Divertron 900 GAS 1x230 50 15m Schuko

Curve tolerance according to ISO 9906

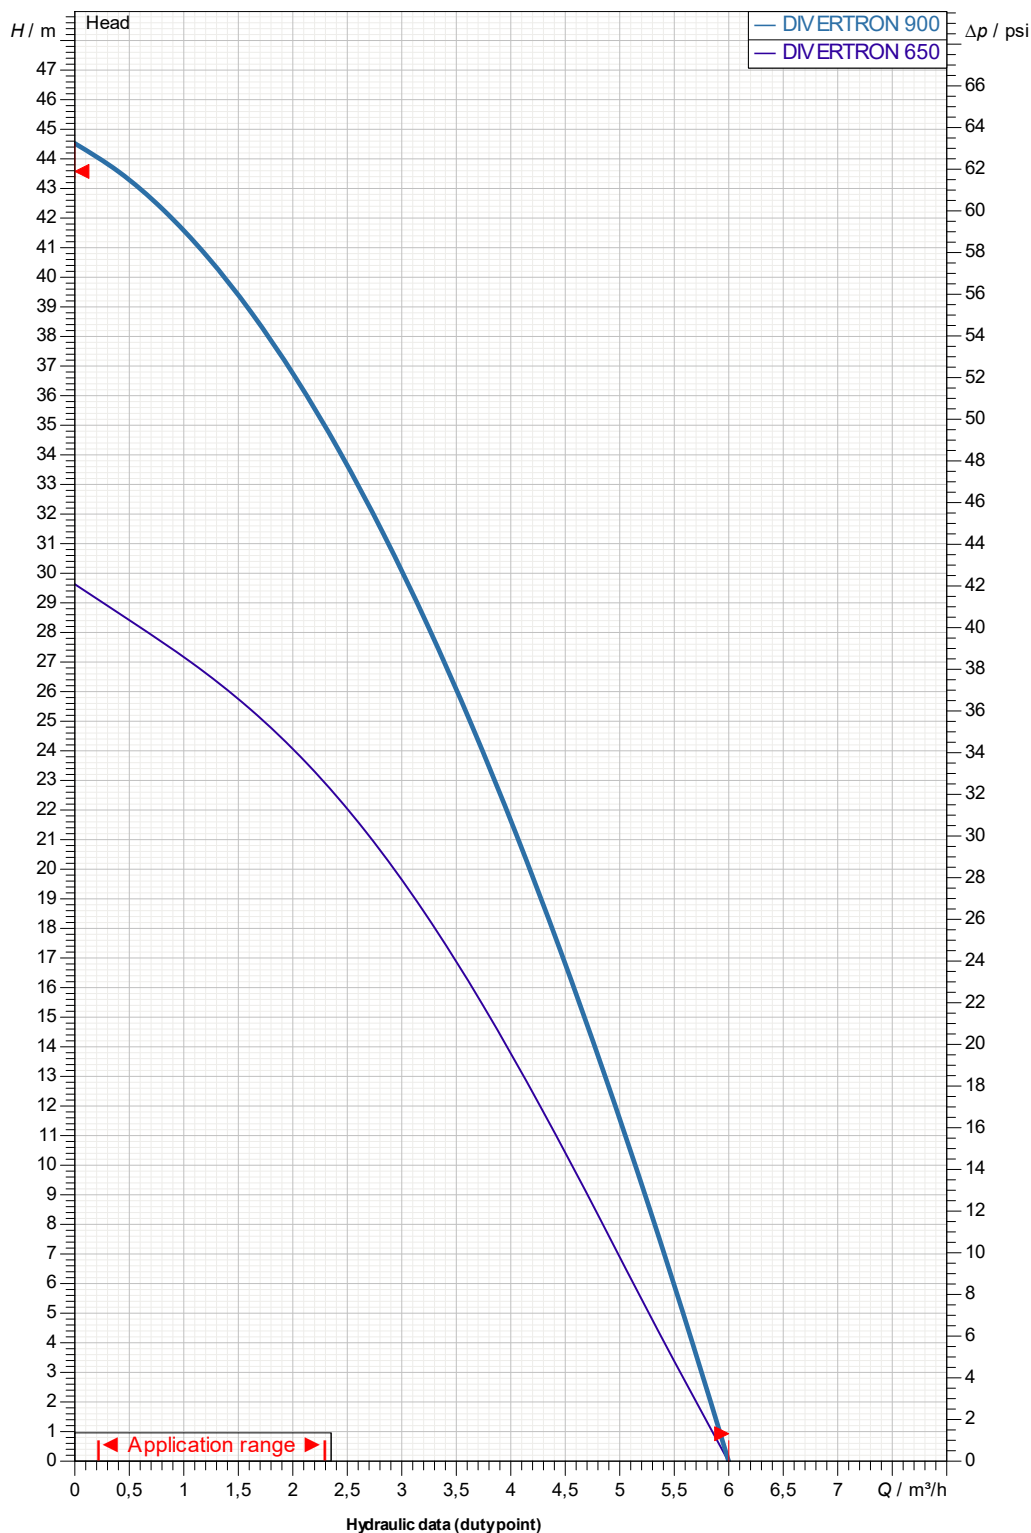

Suction side :

Discharge side :

1" G
--

Flow :

Head :

Rated speed :

2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID


OWNER_

ISSUE_DATE

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Divertron 900 GAS 1x230 50 15m Schuko

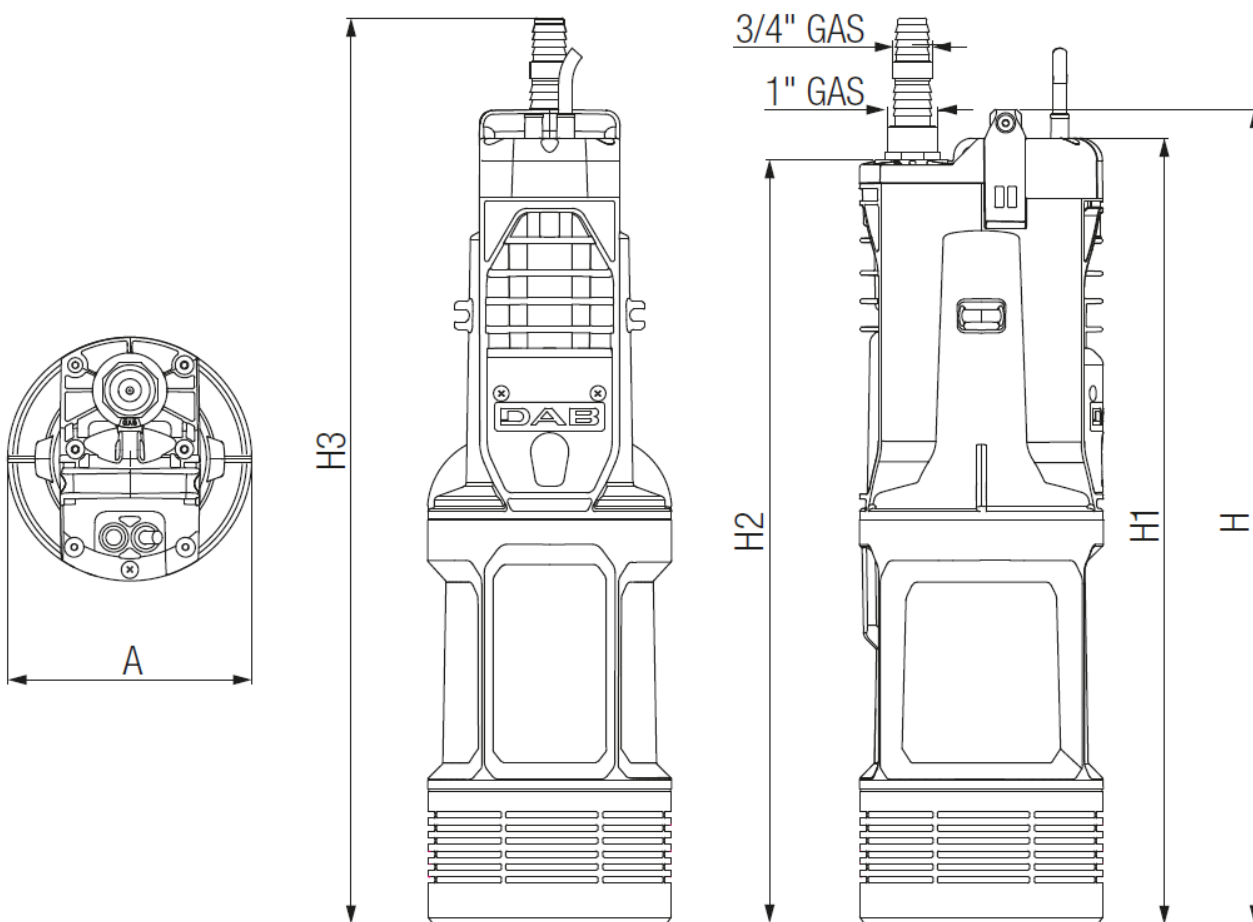

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

A
H
H1
H2
H3

160
536
517
503
596

Suction

Discharge
1" G
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE