
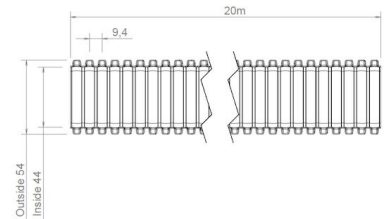
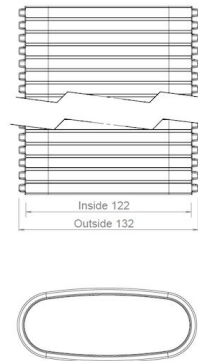


## General information

### Hybalans+ Ducting flex 132x52 L=20M Red

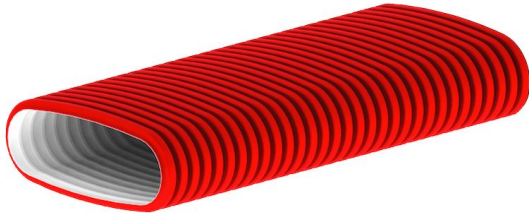

## Specifications

Article number	400480436
Product category	Flexible ducting
Material	HDPE/LDPE
Colour	RAL-3020
Weight (kg)	10,5

## Dimensions

Diameter inside (mm)	122x44
Diameter outside (mm)	132x52
Dimensions (l x w x h mm)	20000 x 132 x 52

## Application Insights

Application	Air
Supply / Extract	Supply/Extract
Bend Radius (mm)	265(h)
Ring stiffness ISO 9969 (kPa)	-
Temperature range (°C)	-25 / +80


## Technical Specifications

---

Maximum air flow (m <sup>3</sup> /h)	55
ζ extract	0,74
ζ supply	0,74
Air tightness class (ATC)	2
R-value (m <sup>2</sup> K/W)	0
Fire rating EN 13501-1	E
Other specifications	-

## Graph

Pressure loss

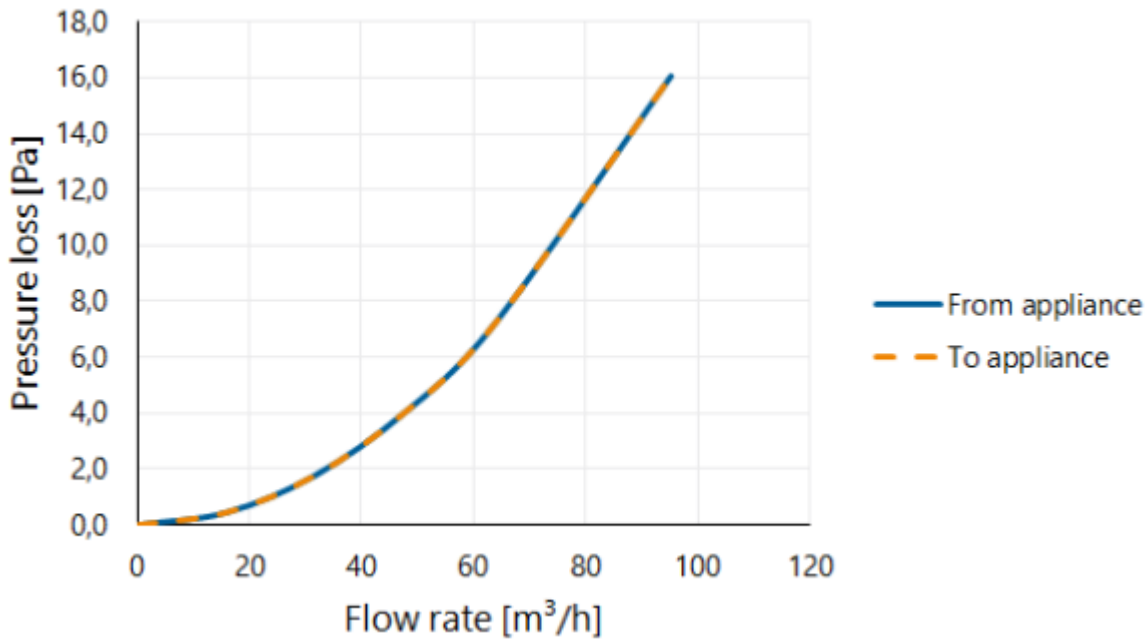

## Table

Flow velocity pressure table

Flow rate			Static pressure loss	
[m/s]	[m³/h]	[l/s]	From appliance [Pa]	To appliance [Pa]
0	0	0	0,0	0,0
1	16	4	0,4	0,4
2	32	9	1,8	1,8
3	48	13	4,0	4,0
4	64	18	7,2	7,2
6	95	27	16,1	16,1