


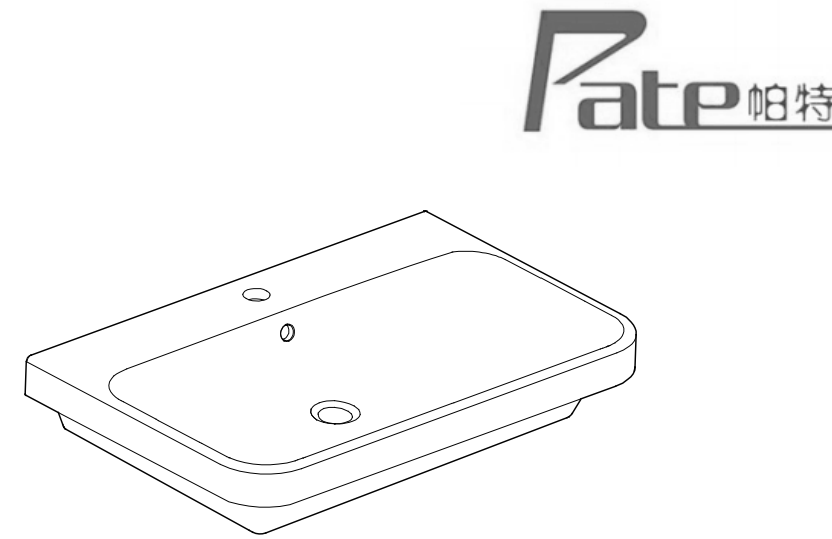

Basin /陶瓷盆

PRODUCT INSTALLATION INSTRUCTIONS

通用安装说明书

- A BEFORE YOU BEGIN 安装之前**
- B PRODUCT INSTALLATION 产品安装**
- C CHECK AFTER INSTALLATION(安装后检查)**
- D TROUBLE SHOOTING CHART 故障处理**
- E MAINTENANCE 维护与保养**

A BEFORE YOU BEGIN 安装之前

1 NOTES

- Please read these instructions carefully to familiarize yourself with the required tools, materials, and installation sequences. Follow the sections that pertain to your particular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions.
- All information in these instructions is based upon the latest product information available at the time of publication. We will reserve the right to make changes in product characteristics, packaging, or availability at any time without notice.
- These instructions contain important care, cleaning, and warranty information, please leave instructions for the consumer.

注意

- 请仔细阅读本安装指引，以便熟悉所需工具、材料及安装顺序；请遵照适用的章节来安装您的座便器，以免由于安装不当而导致不必要的损失。除了有关正确的安装方法之外，还务请详阅所有操作及安全指引。
- 本安装指引所记载的一切资料，均以印刷时的最新产品情况为基础，公司保留随时更改产品特性、包装、或供应情况的权利，恕不另行通知。
- 本安装指引包含了故障处理及日常清洁、维护等重要资料，请用户保存。

2 TOOLS AND MATERIALS REQUIRED (NOT SUPPLIED) 所需工具及材料(不随货供应)

 A.Tools Required	 B.Materials Required	 A.所需工具	 B.所需材料
.254mm(10")adjustable wrench .305mm(12")pipe wrench .Metal file (file cut) .Tape measure .Tubing cutter .Level .Hacksaw .Putty knife .Screwdriver .Scissors .Safety glasses .Pencil .Keyhole saw or saber saw .Drill(13mmor1/2"dia.drillbitorlarger)	.Flexible hose .Supply shut-off valve .Teflon Tape .Neutral Mildew Resistant Silicone Sealant	.254mm活动板钳 .305mm喉管板钳 .锉刀 .卷尺 .切管刀 .水平尺 .钢锯 .涂油灰刀 .螺丝刀 .剪刀 .护眼镜 .铅笔 .匙孔线锯或手提电锯 .钻（直径为13mm钻头或更大）	.编织软管 .供水管止水阀 .生胶带 .防腐中性硅胶


3 BEFORE YOU BEGIN 安装前确认

- Please read these instructions carefully before begin for properly installation.
- Please follow steps in the instruction to install this product or may result in costly mistake. Innoci shall not be responsible for any loss from that mistake.
- Professional help is required for installation of drainage pipeline and tubing.
- The walls and floor must be square,plumb,andlevel.
- Wall and floor must be waterproof before installation toilet.
- Check all connection for leaks after installation.
- Silicone sealant solidification time shall not be less than 24 hours after installation before normal use.
- Do not over tighten nut or toilet may be cracked or damaged.
- Observe all local plumbing and building codes.


- 安装前，请仔细阅读本手册，并正确施工。
- 请按本说明书内记载的方法施工。擅自变更施工方法所引起的不良后果，本公司将不负责任引起之损失。
- 排水管道及其配管的安装，请专业人员施工。
- 墙壁和地板必须方正、平整和水平。
- 安装时地面、墙面必须进行防水处理。
- 安装后必须进行试验，看看是否漏水。
- 使用硅胶进行固定之后，在正常使用前至少预留24小时。
- 安装螺母时请勿用力过大，以免产品破损或崩裂。
- 遵守当地给排水和建筑规定。

B PRODUCT INSTALLATION 产品安装


Vessel Basin Installation 台上盆安装

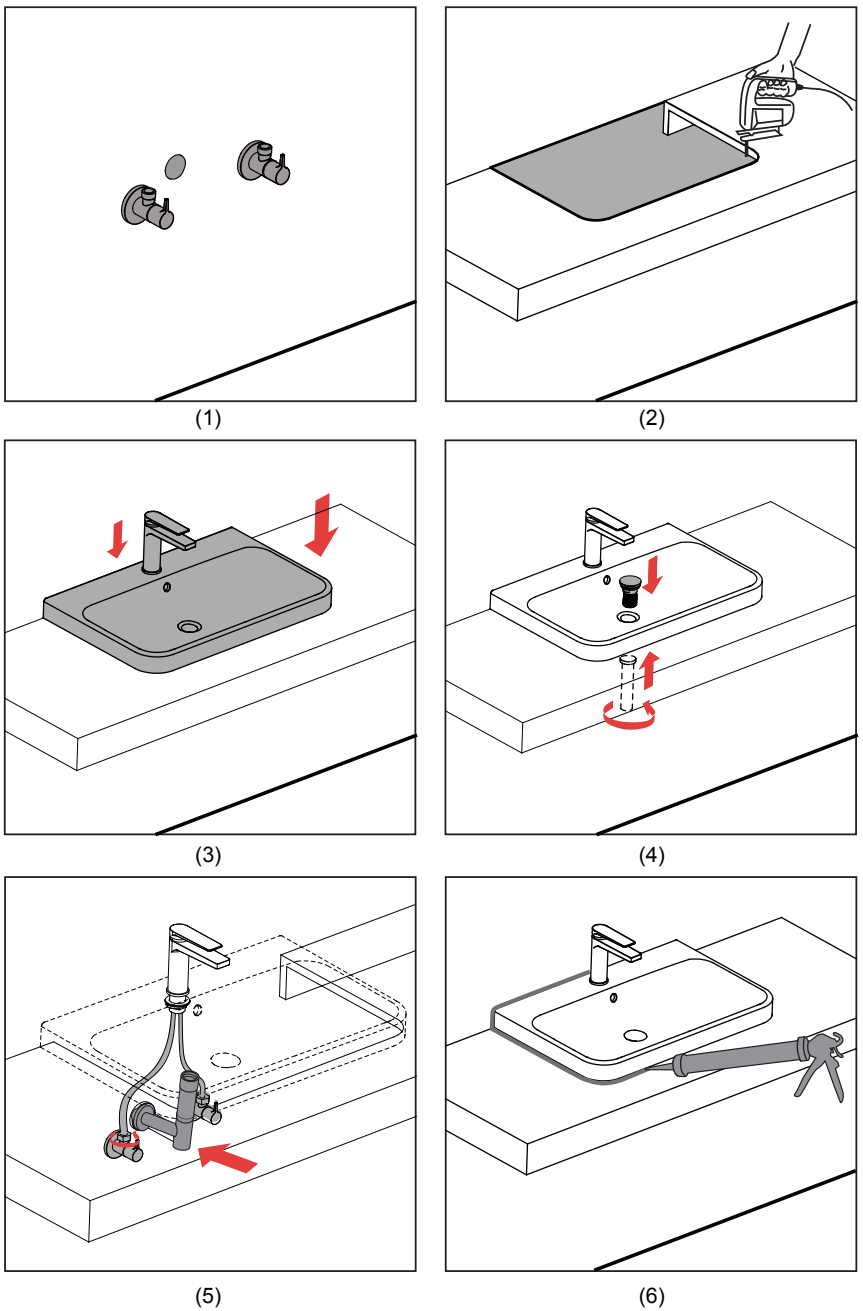


Wall-hung Basin Installation 挂盆安装

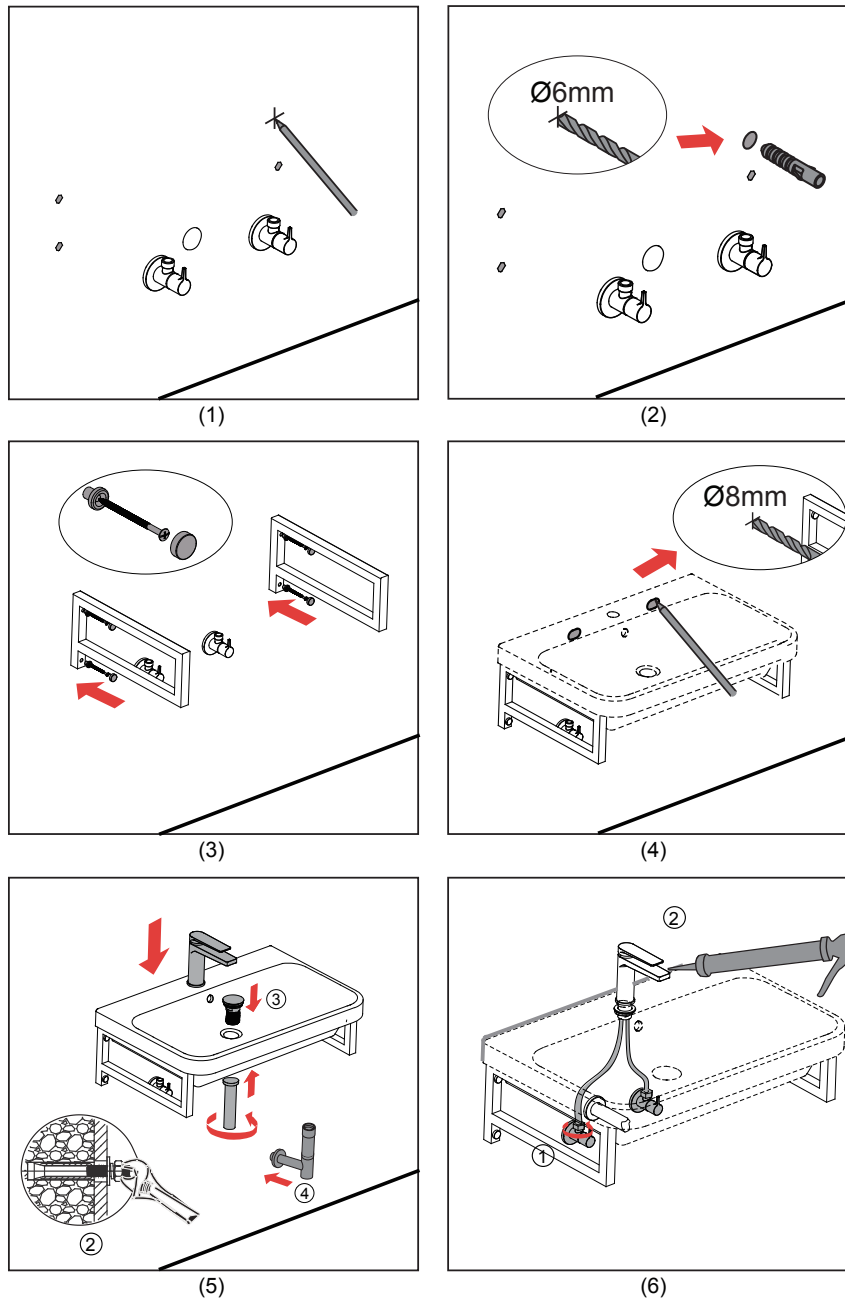


Semi-Recessed Basin Installation 半嵌盆安装

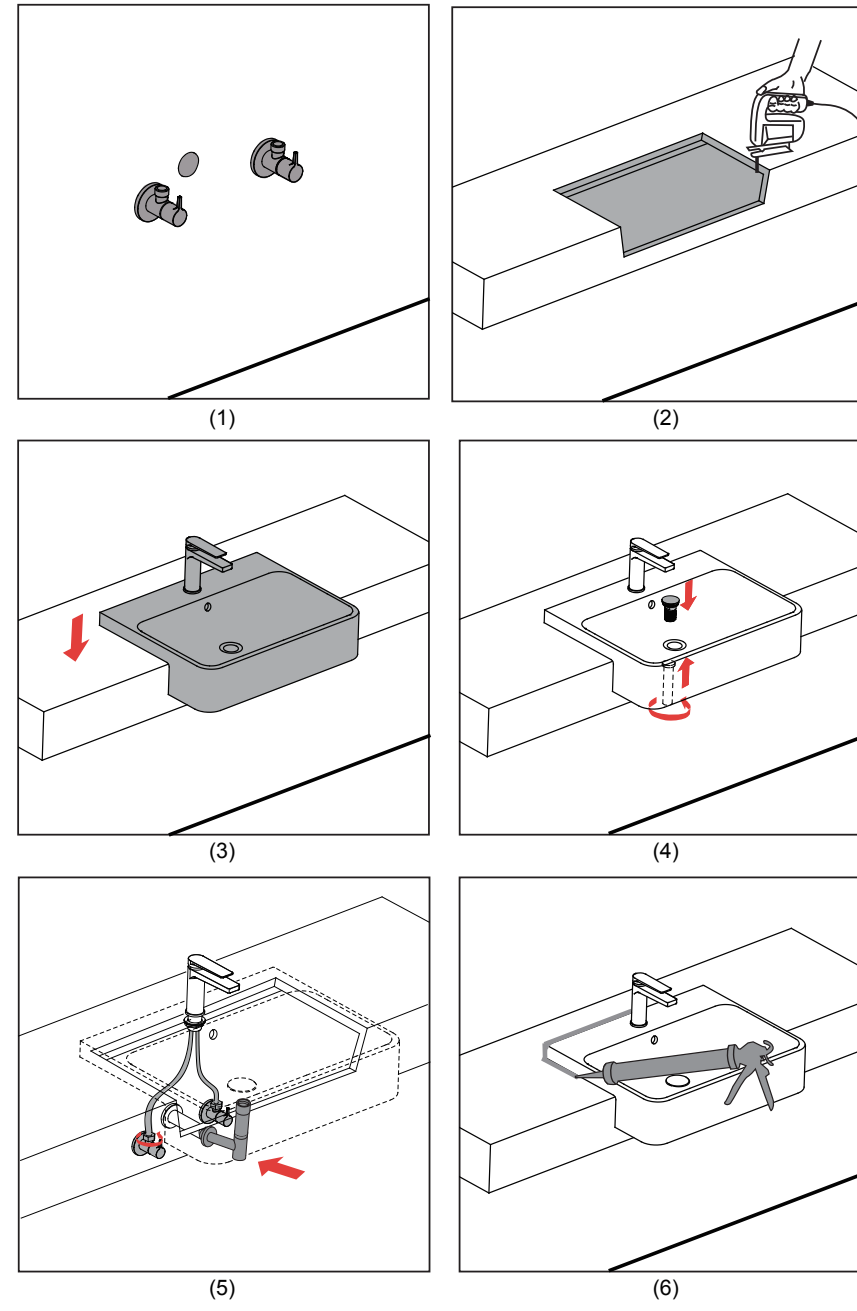


Pedestal Basin Installation 柱盆安装

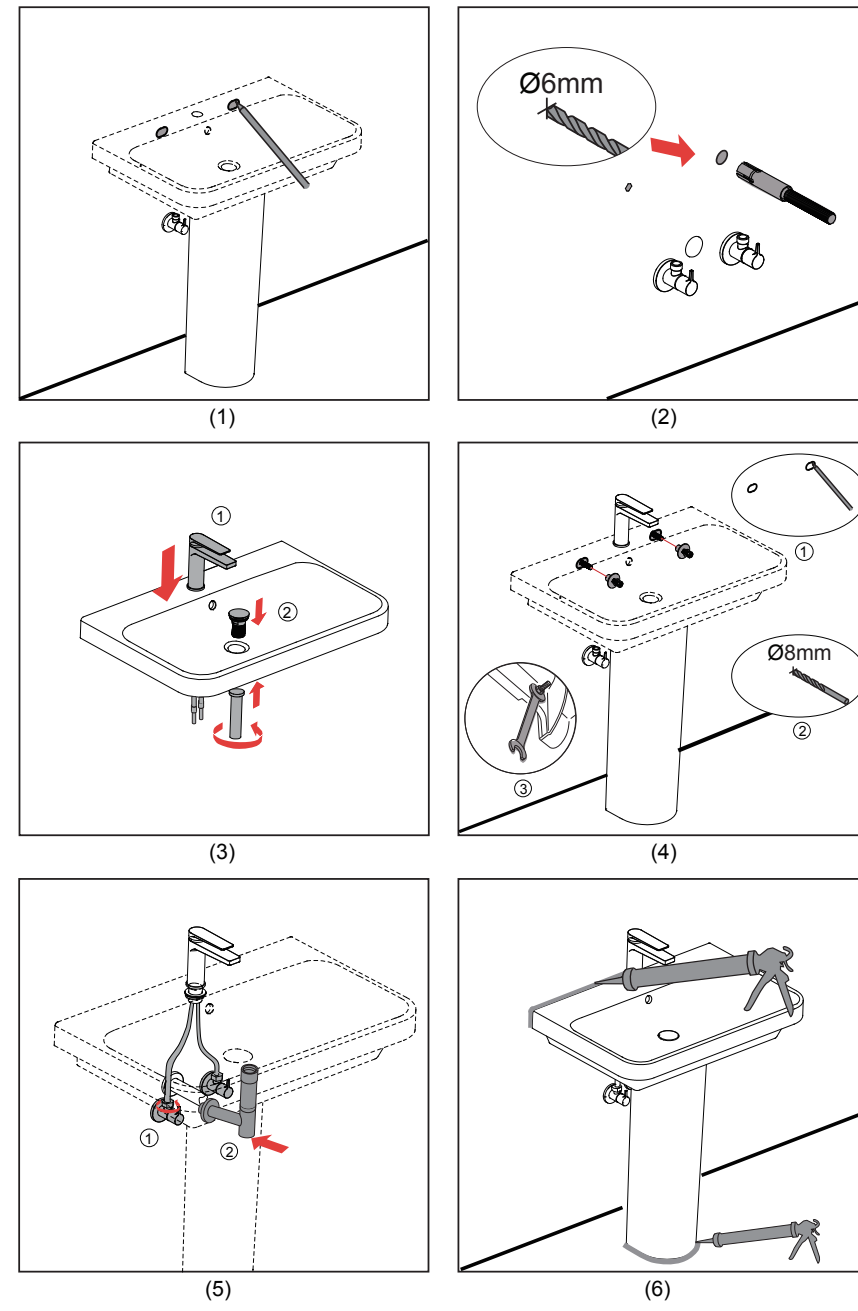


Semi Pedestal Basin Installation 半柱盆安装

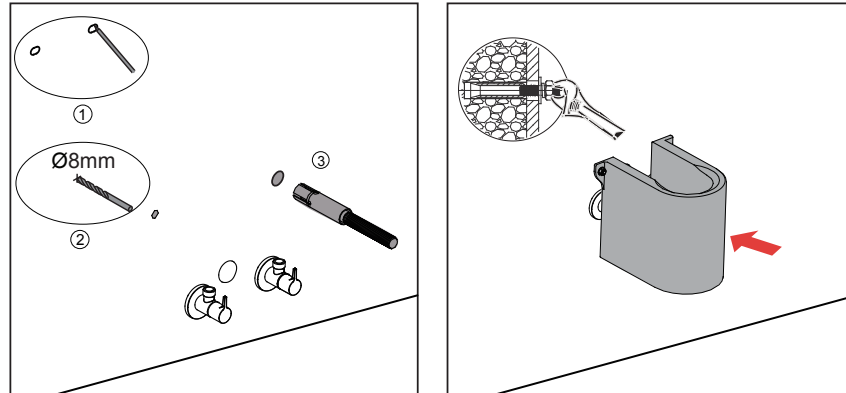


(1)

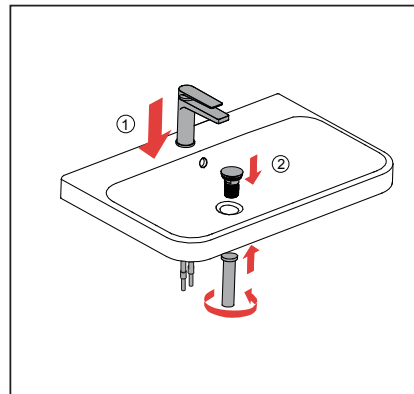


(3)

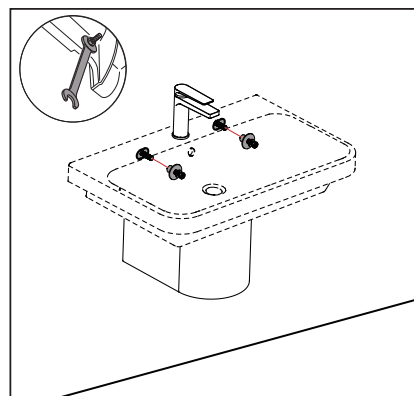


(5)

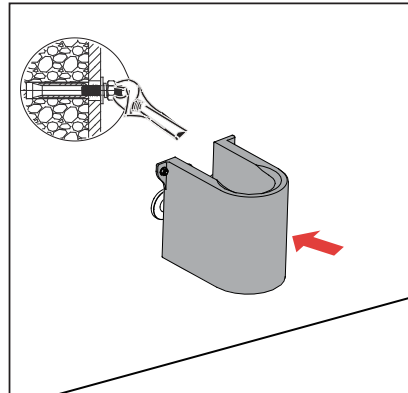

(2)

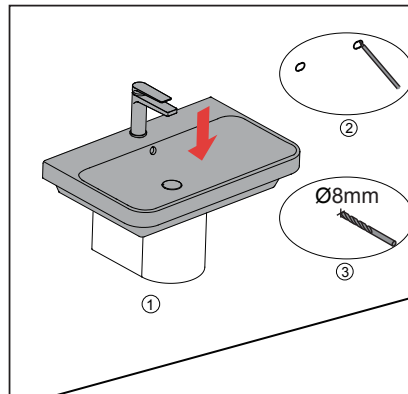


(4)

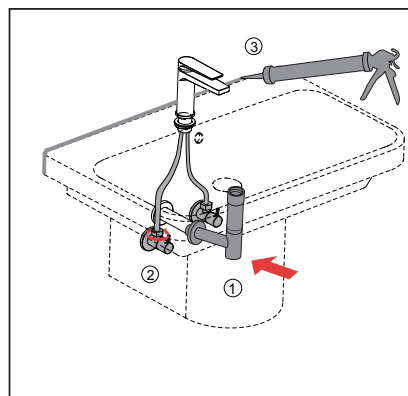


(6)


Vessel Basin Installation 碗盆安装

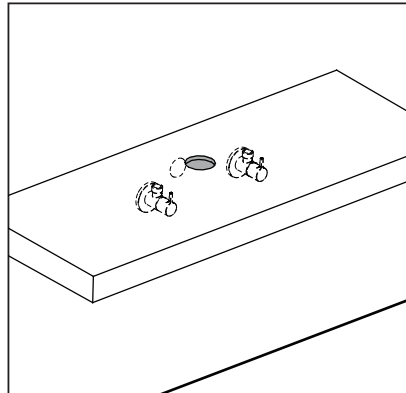


(1)

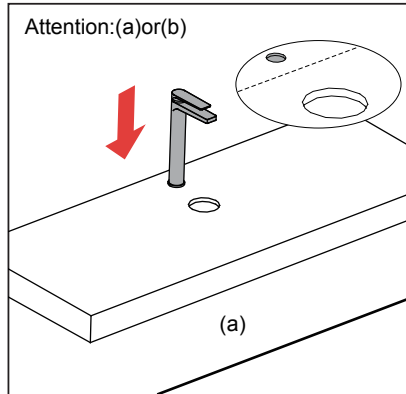


(3)

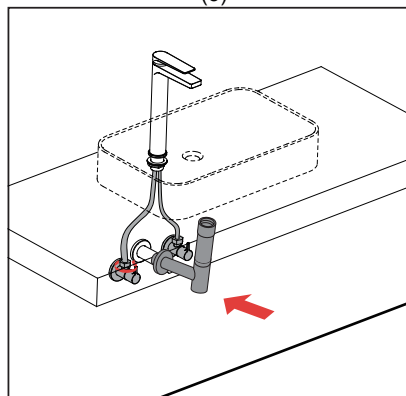


(5)

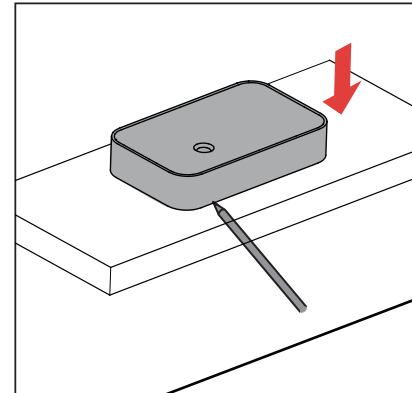

(2)

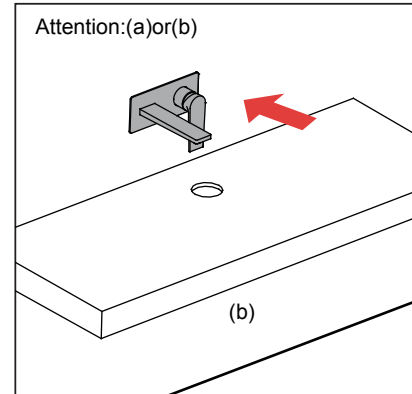


(4)

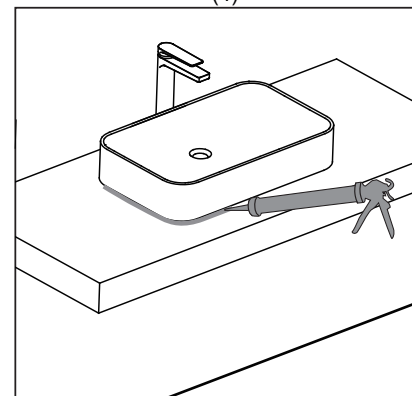


(6)


Under-mount Basin Installation 台下盆安装

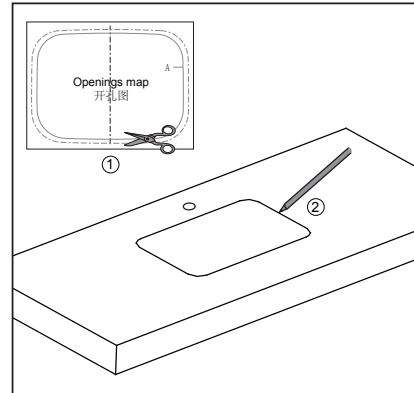


(1)

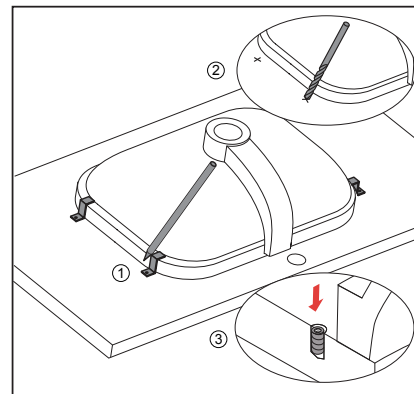


(3)

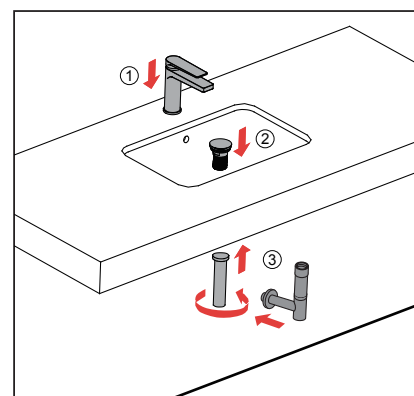


(5)

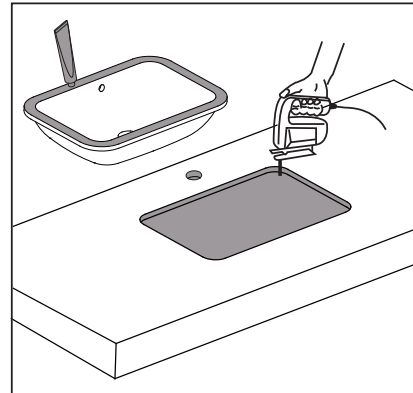

(2)

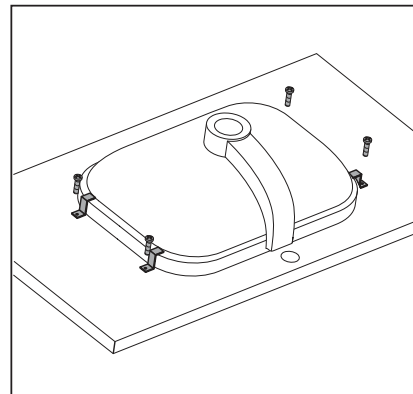

(4)

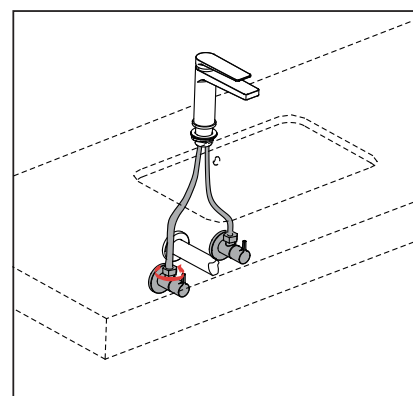

(6)

C CHECK AFTER INSTALLATION (安装后检查)

Check list	YES/NO
1.Open shut-off valve,press flush button 5-6 times to assure if it operate properly?	
2.Whether the basin and the wall at the junction of silicone injection?	
3.Does shut-off valve operate properly?	
4.Are there any leakages ?	

检查项目	确认
1.打开角阀充水后，按动按钮5-6次确认排水按钮的操作是否正常？	
2.面盆与墙面的结合处是否注入硅胶？	
3.确认角阀是否正常操作？	
4.确认是否漏水现象？	

D TROUBLE SHOOTING CHART (故障处理)

PROBLEM	PROBLEM CAUSES	REMEDY
The basin is loose (Not steady installed)	1. The gap between the basin and the board is too wide. 2. The silicone sealant applied to basin board is not enough.	Apply more silicone sealant to the touching area between basin and board.
Please contact your dealer or our service departments for help if above corrective action failed to solve the problem.		

现象	原因	处理
面盆松动。 (安装不牢固)	1.面盆和台面间隙太大。 2.施加在台面上的防霉中性硅胶不充裕。	在面盆和台面接触的地方多施加些防霉中性硅胶。
按上述处理后仍无改善，请与销售店或厂商服务部联系。		

E INTENANCE (维护与保养)

●USE 使用

- 1.Try to protect basin surface and radius in particular from solid stuff hitting of scratching to avoid glaze damage.
- 1.应避免硬物直接撞击产品的表面，陶瓷表面特别R角处，要求在使用时不要将其它盛器在陶瓷表面摩擦，以免擦伤釉面。

●CLEANING 清洁

- 1.Wiped clean with neutral cleaner or soft damp cloth.
- 2.To keep your basin looking new , make sure you rinse it out thoroughly after each use.
Do not use abrasives on this product ,as they will scratch and ruin the surface .
Stubborn stains , paint , or tar can be removed with turpentine or paint thinner.
- 1.清洁时请用中性清洁剂或湿软布擦洗。
- 2.请勿用腐蚀性清洁剂，钢丝刷，百洁布之类用品清洗，以防磨损面盆表面。

● MAINTENANCE 保养

1. For deep cleaning, please fill the basin up with water (water: bleach is 1:1) and soak for at least 15-20 minutes then clean the bottom and all around. Or use "84 disinfectant" (following the instruction) to clean the basin.
Remember to remove the water in time with dry cloth and keep the board dry.
1. 如果使用较长时间,当你觉得很脏时,请将盆加满水(1:1=水:漂白溶液)至少浸泡15-20分钟,然后清洗底部和四周,或用"84消毒液"(按其使用说明)清洗面盆。要记住用干毛巾及时吸去水渍，尽量保持台面干爽。