

GUARD air curtain

Leader in energy loss protection

- ECOenergy – energy-saving PTC heater
- Modern design
- Effective protection - quiet operation
- Remote control by mobile application



55 countries
with our brand

Q TOP
quality

\$ best price
Sufficient support

Guard

more at
sonniger.com



manual



model 3D

TECHNICAL PARAMETERS	AIR CURTAINS WITH WATER HEATER			AIR CURTAINS WITH ELECTRIC HEATER			AIR CURTAINS WITHOUT HEATER			
	GUARD 100W	GUARD 150W	GUARD 200W	GUARD 100E	GUARD 150E	GUARD 200E	GUARD 100C	GUARD 150C	GUARD 200C	
index	CG0019	CG0020	CG0021	CG0022	CG0023	CG0024	CG0025	CG0026	CG0027	
unit length	m	1	1,5	2	1	1,5	2	1	1,5	2
effective range	m	4	4	4	4	4	4	4	4	4
heat output range	kW	10-16	20-29	25-40	4 - 7	6,5 - 11	8,5 - 14	-	-	-
max. air output	m ³ /h	2000	3600	4800	2000	3600	4800	2100	3700	5000
diameter of connection nozzles	"	1/2	1/2	1/2	-	-	-	-	-	-
supply voltage	V/Hz A	230/50 1,4 A	230/50 1,8 A	230/50 2,4 A	3x400/50 14 A	3x400/50 21 A	3x400/50 27,5 A	230/50 1,4 A	230/50 1,8 A	230/50 2,4 A

ACCESSORIES

Magnetic door switch | **DOOR SWITCH (CGA0028)**

Remote control



Panel COMFORT (WAA0054N)


- Unique SONNIGER design
- Manual speed regulation
- Switch-off heating element in the summer season



Panel INTELLIGENT Wi-Fi (WAA0035W)


- Remote control using mobile app
- Manual speed regulation
- Compatible with BMS-MODBUS

HORIZONTAL AIR FLOW RANGE (max range for horizontal installation)

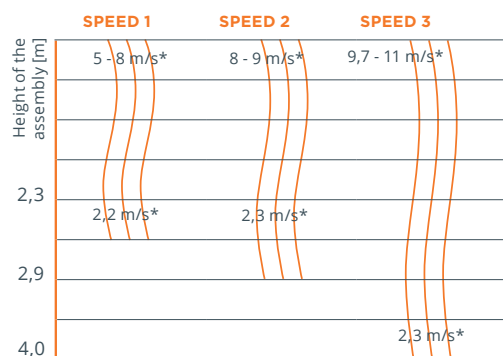

VERTICAL AIR FLOW RANGE (max range for vertical installation)

* air flow speed

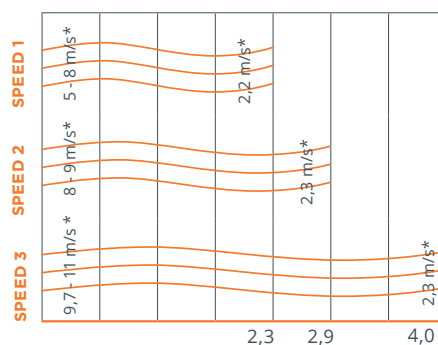

Unit length



ECOenergy PTC heater



modern design



effective protection - quiet operation



remote control using mobile app



BEST PRICE