

Connecting bend set RAUTITAN

Application:

for connection of radiators in one- or two-pipe systems

Properties:


- suitable for connections coming out of the floor or the wall with different leg dimensions of the pipe
- in combination of radiators and underfloor heating systems with similar flow temperatures of both systems (e.g. underfloor heating + bathroom radiator)
- for RAUTHERM SPEED pipes and RAUTHERM ML pipes
- for RAUTHERM S pipes

Material:

- Copper pipe 15 x 1 mm
- connection fitting: brass according EN 12164, EN 12165, EN 12168

Note:

- additionally it is recommended to fix the connecting bends with the floor fixing bracket (material number 12404571002) for optical reasons
- for connection of one radiator 2 pieces of connecting Bend set are necessary
- XXX

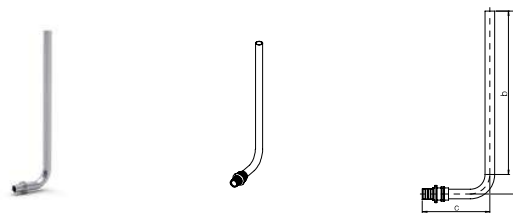

Mat.-no.	Description	a mm	b mm	c mm	Weight g/pc	PG pc
12607001002	17x2.0/16x1.5/16x2.0/ 250 mm	282	252	78	134	10
12607101002	17x2.0/16x1.5/ML 16 / 1.000 mm	1032	1002	78	395	10
12607201002	20 x 2.0 / 250 mm	282	252	78	139	10

04.02 Installation systems floor**Staple gun multi**

Application:

tool to fix the RAUTAC tacker staples (12402211002) and tacker staples (12623731002) on the tacker sheet



Mat.-no.	Description	Weight kg/pc	PG pc	PG pc
12278351001	for RAUTAC / fixing Staple	2.57	1	32