



459

STRAINER WITH FILTER

TECHNICAL SPECIFICATIONS

THREADS: ISO 228
 FINISHING: SAND BLASTED
 FILTER: RHOMBOIDAL FLATTENED SHEET




SIZE	PN	MAX TEMPERATURE	DEGREE OF FILTRATION:	KV
1/2"	PN20	80°C	400 µm	4,6 m ³ /h
3/4"	PN20	80°C	400 µm	7,3 m ³ /h
1"	PN20	80°C	400 µm	12,5 m ³ /h
1 1/4"	PN20	80°C	500 µm	17 m ³ /h
1 1/2"	PN20	80°C	500 µm	24,5 m ³ /h
2"	PN20	80°C	500 µm	36 m ³ /h

MATERIALI / MATERIALS

DESCRIPTION	N.	MATERIAL
BODY	1	BRASS CW617N
FILTER	1	STAINLESS STEEL AISI 304

OVERAL DIMENSIONS

D	DN	L	H
1/2"	15	58	40
3/4"	20	70	50
1"	25	87	60
1" 1/4	32	96	68
1" 1/2	40	106	75
2"	50	126	90

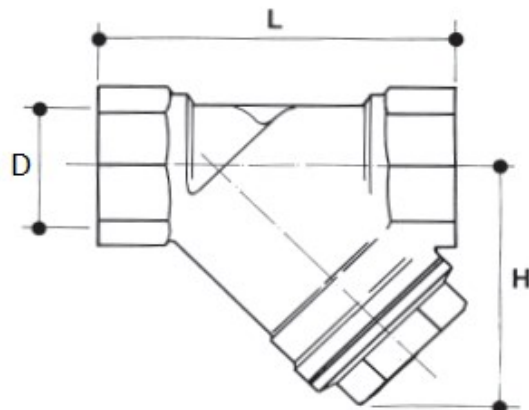



FLUID CHARACTERISTICS

IN ORDER TO GRANT PRODUCT WARRANTY, THE QUALITY OF THE WATER CONTAINED IN THE SYSTEM HAS TO BE IN CONFORMITY WITH THE RULES IN FORCE IN THE COUNTRY OF RELEVANCE OR AT LEAST TO PRESENT FEATURES NOT LESS THAN THOSE PRESCRIBED BY ITALIAN NORM UNI 8065:2019.

AS GENERAL MINIMUM INDICATIONS, AT LEAST THE FOLLOWING PARAMETERS HAVE TO BE RESPECTED:

ASPECT:	LIMPID
PH:	> 7 & < 8,5
IRON (FE):	< 0,5 MG/KG
COPPER (CU):	< 0,1 MG/KG
ANTIFREEZE (*):	PASSIVATED PROPYLENE GLYCOL
CONDITIONING (*):	IN THE RESPECT OF THE CONCENTRATIONS INDICATED BY THE PRODUCER

(*) ANYWAY, IN CASE OF USE OF ADDITIVES OR CONDITIONING SUBSTANCES, YOU WILL HAVE TO PREVENTIVELY VERIFY THE COMPATIBILITY OF THE SUBSTANCES YOU INTEND TO USE WITH RESPECT TO THE CONSTRUCTION MATERIALS STATED IN THIS TECHNICAL DOCUMENT FOR ALL OUR PRODUCTS.

