

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol : **Customer pos. no.:**

60186164

Articol:

EVOSTA2 40-70/150 SAN

Date pompa

Presiune nominala: 1000 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤

Presiune minima la nivelul apei:

Temperatura: °C 90
Presiune minima la nivelul apei: m 10

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit:
Inaltime de pompare:

Materiale

Corp pompa: Bronz
Rotor: Ultrason
Arbore: Alumina
Rotor: Fe
Carcasa motorului: AISI 304
Camasa stator: AISI 316
Dop dezaerator: Alama

Curve tolerance according to ISO 9906

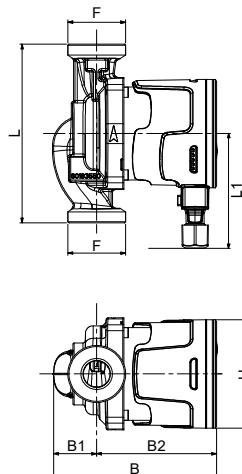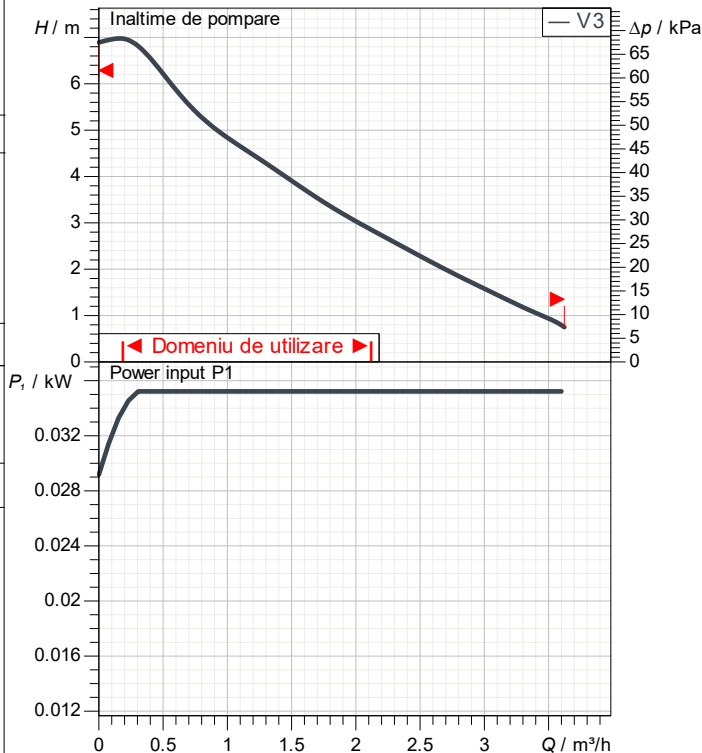

Date motor

Marca: DAB
Max. Power input P1: 0.035 kW
Tensiune nominala: 1~ 230 V 50 Hz
Curent nominal: 0.32 A
Grad de protecție: IP X5

Dimensiuni de gabarit mm

B	134.6	L1	96				
B1	35.5						
B2	99.1						
F	1" 1/2						
H	91						
L	150						

Masa 2.16 kg

Racorduri pompa:

Partea cu aspiratia: 1" 1/2 G
Partea cu refularea: 1" 1/2 G


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOSTA2 40-70/150 SAN

Curve tolerance according to ISO 9906

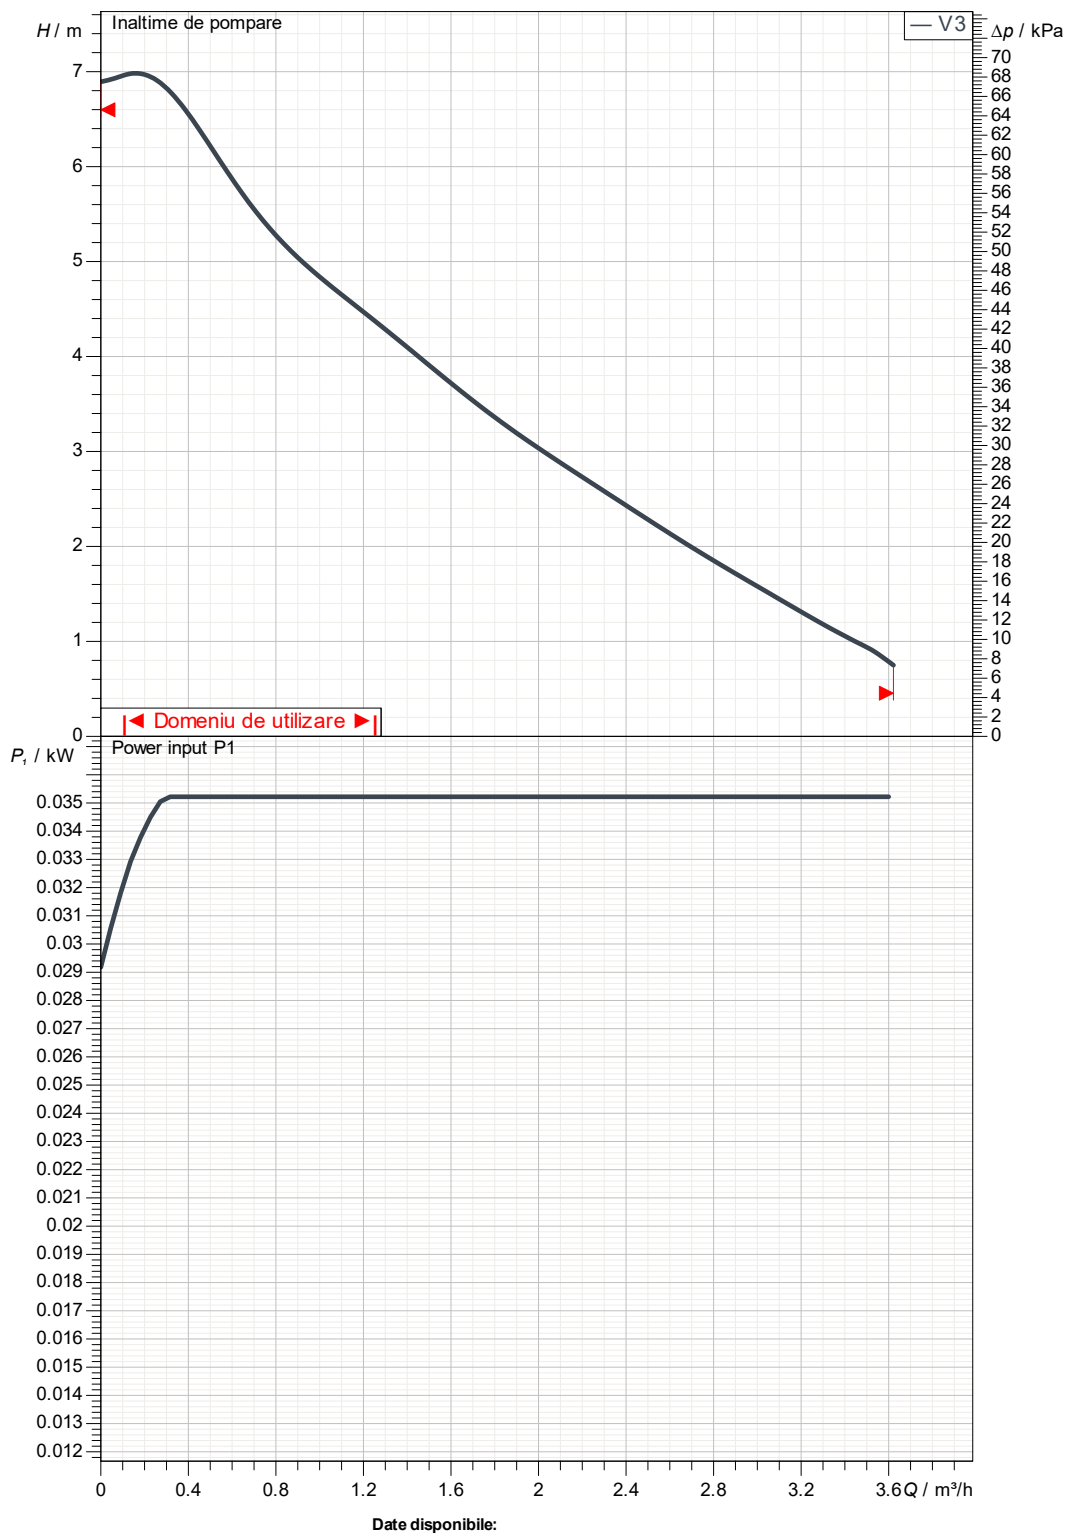

Date disponibile:

Partea cu aspiratia:

1" 1/2 G
1000 kPa

Partea cu refularea:

1" 1/2 G
1000 kPa

Debit :

Înălțime de pompare :

Viteză nominală:

2900 1/min

Oferta

ID oferta

Creat de

Creat



08/13/2025

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOSTA2 40-70/150 SAN

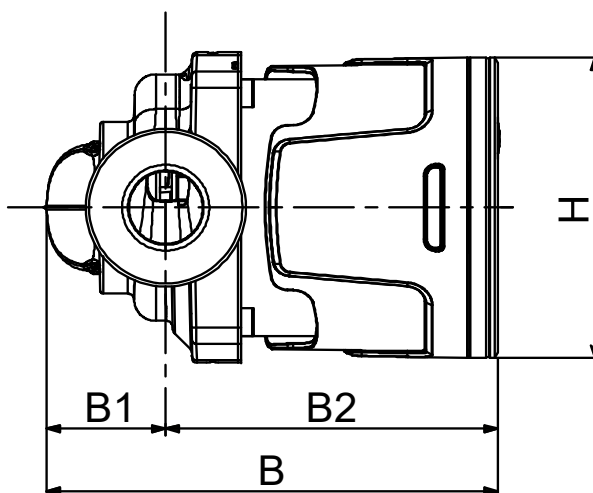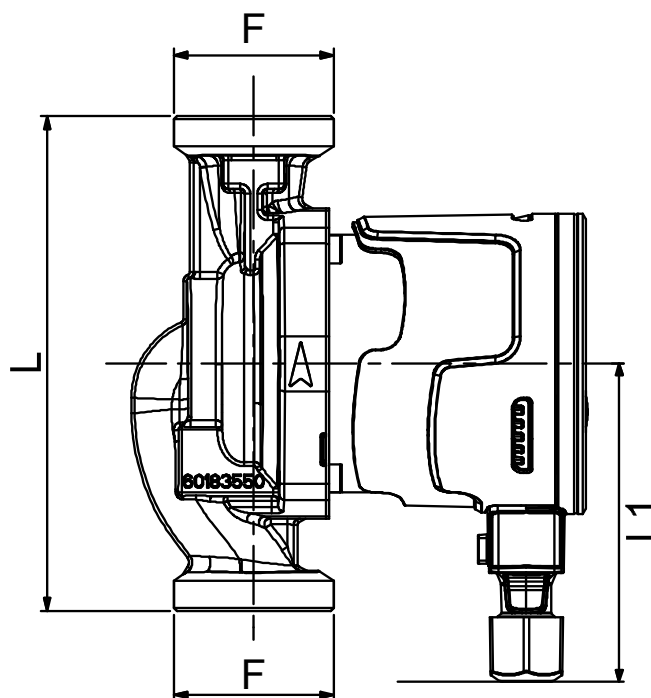

Dimensiuni in mm							Racorduri pompa:	
1	B	134.6						
2	B1	35.5					Aspiratie	
3	B2	99.1					1 " 1/2 G	
4	F	1"1/2					1000 kPa	
5	H	91						
6	L	150						
7	L1	96					Refulare	
8							1 " 1/2 G	
9							1000 kPa	
10								
11								
Oferta			ID oferta			Creat de		Creat
								08/13/2025