

SBR EXTREME 100 - 20


SBR EXTREME 100-8 vulcanised rubber
vibration-resistant floor base

11105060V - 11105062V - 11105064V
11105066V - 11105068V



TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with threaded plate, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

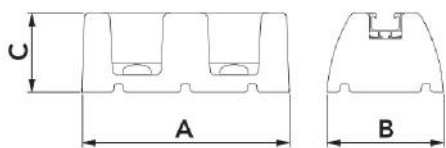

DIMENSIONS

CODE	A [mm]	B [mm]	C [mm]
11105060V	250	140	95
11105062V	450	140	95
11105064V	600	140	95
11105066V	1000	140	95
11105068V	1200	140	95

TECHNICAL DATA

CODE	LOAD CAPACITY [kg]
11105060V	200
11105062V	300
11105064V	500
11105066V	650
11105068V	750

ITEMS

CODE	DESCRIPTION
11105060V	SBR "EXTREME-20" 250 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105062V	SBR "EXTREME-20" 450 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105064V	SBR "EXTREME-20" 600 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105066V	SBR "EXTREME-20" 1000 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8
11105068V	SBR "EXTREME-20" 1200 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8