


## MF ball valve PN 25 with butterfly handle

### Art. 434B

MF ball valve PN 25 with butterfly handle

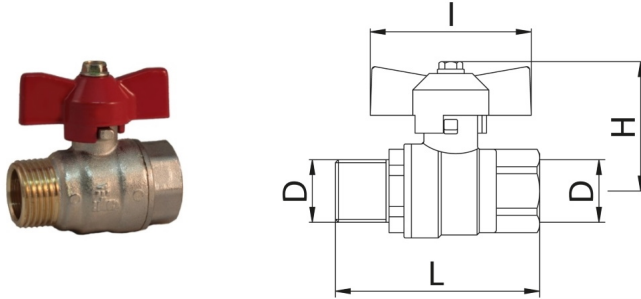

### Items

| Code       | Size (D) | Smooth | Handle     | Pack | I    | L    | h    |
|------------|----------|--------|------------|------|------|------|------|
| 434B00040E | 1/2"     | ●      | ● Aluminum | 20   | 46.0 | 51.0 | 42.0 |
| 434B00040F | 1/2"     | ●      | ● Aluminum | 20   | 46.0 | 51.0 | 42.0 |
| 434B00050E | 3/4"     | ●      | ● Aluminum | 15   | 54.0 | 61.0 | 45.0 |
| 434B00050F | 3/4"     | ●      | ● Aluminum | 15   | 54.0 | 61.0 | 45.0 |
| 434B00060E | 1"       | ●      | ● Aluminum | 8    | 64.0 | 70.0 | 51.0 |
| 434B00060F | 1"       | ●      | ● Aluminum | 8    | 64.0 | 70.0 | 51.0 |

### SMOOTH

- Yellow
- Chrome
- Nickel
- White

Flow: Standard

Working temperature: 0-110°C

Max working pressure: 25 bar

Body in forged brass

Anti blowing stem

Threads: ISO 228

Valves 425B -424B and 425A -424A in sizes 1 1/4" -1 1/2" -2" are the same articles.

Made in accordance with the safety requirements laid down by European Directive 2014/68/EU (PED).