

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60169968

Customer pos. no.:

Articol:

3 NKP-G 50-200/200 IE3

Date pompa

MEI $\geq 0,50$

Diametru rotor: 200 mm

Presiune nominala: 1000 kPa

Temperatura min. fluid -15 °C

Temperatura max. fluid 70 °C

Temperatura max. ambianta 40 °C

Date de functionare cerute

Debit :

Inaltime de pompare :

Fluid pompat : Apă

Temperatura fluid: 20 °C

Densitate 998.3 kg/m³

Vascozitate cinematica: 1.005 mm²/s

Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :

Inaltime de pompare :

Materiale

Corp pompa Fonta 200 UNI ISO 185

Suport Fonta 200 UNI ISO 185

Rotor Fonta 200 UNI ISO 185

Elansare mecanica Carbon/carbura de siliciu - EPDM

Garnitura OR Etilen propilen EPDM

Arbore pompa AISI 304 - UNI 6900/71

Suction and discharge manifolds Galvanized steel

Date motor

Marca :

Putere nominala P2: 3 x 15 kW

Viteza nominala: 2940 1/min

Tensiune nominala : 3~ 400 V 50 Hz

Curent nominal : 3 x 26.5 A



Grad de protectie: IP 55

Racorduri pompa:

Partea cu aspiratia: DN 200 / 1000 kPa

Partea cu refularea: DN 150 / 1000 kPa

Curve tolerance according to ISO 9906

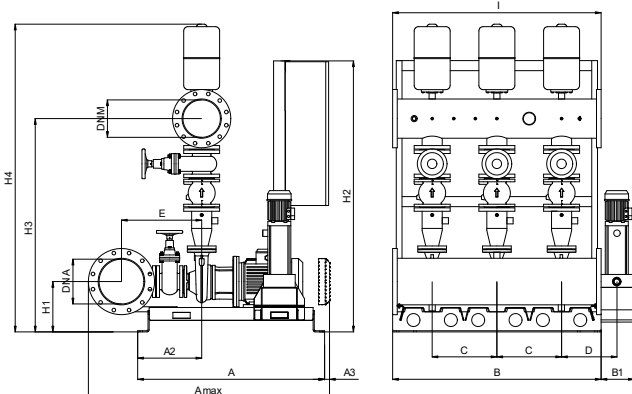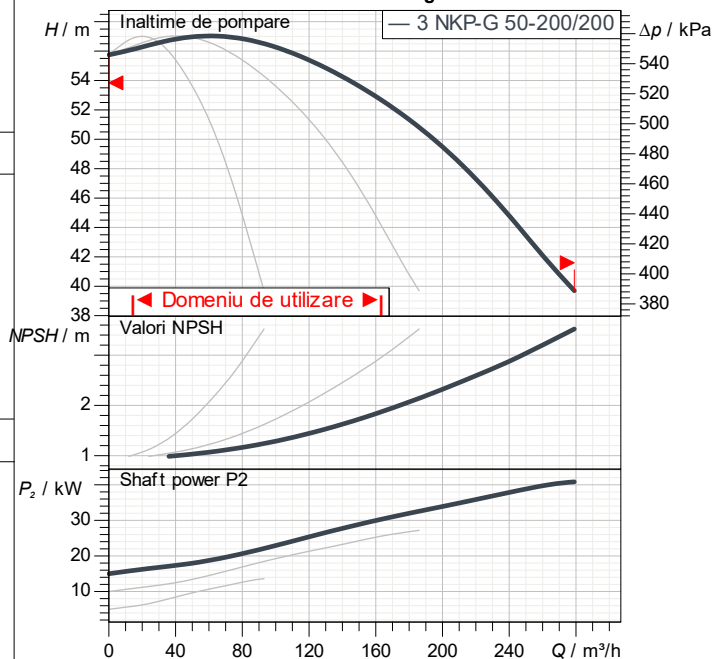

WITHOUT the jockey pump, do not consider B1 and D.

Masa

0 kg

Dimensiuni de gabaritm

A	1290
A2	434
Amax	1495
B	1450
DNA	DN 200
DNM	DN 150
E	460
H1	330
H2	1600
H3	1260
H4	1865
I	1450


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

3 NKP-G 50-200/200 IE3

Curve tolerance according to ISO 9906

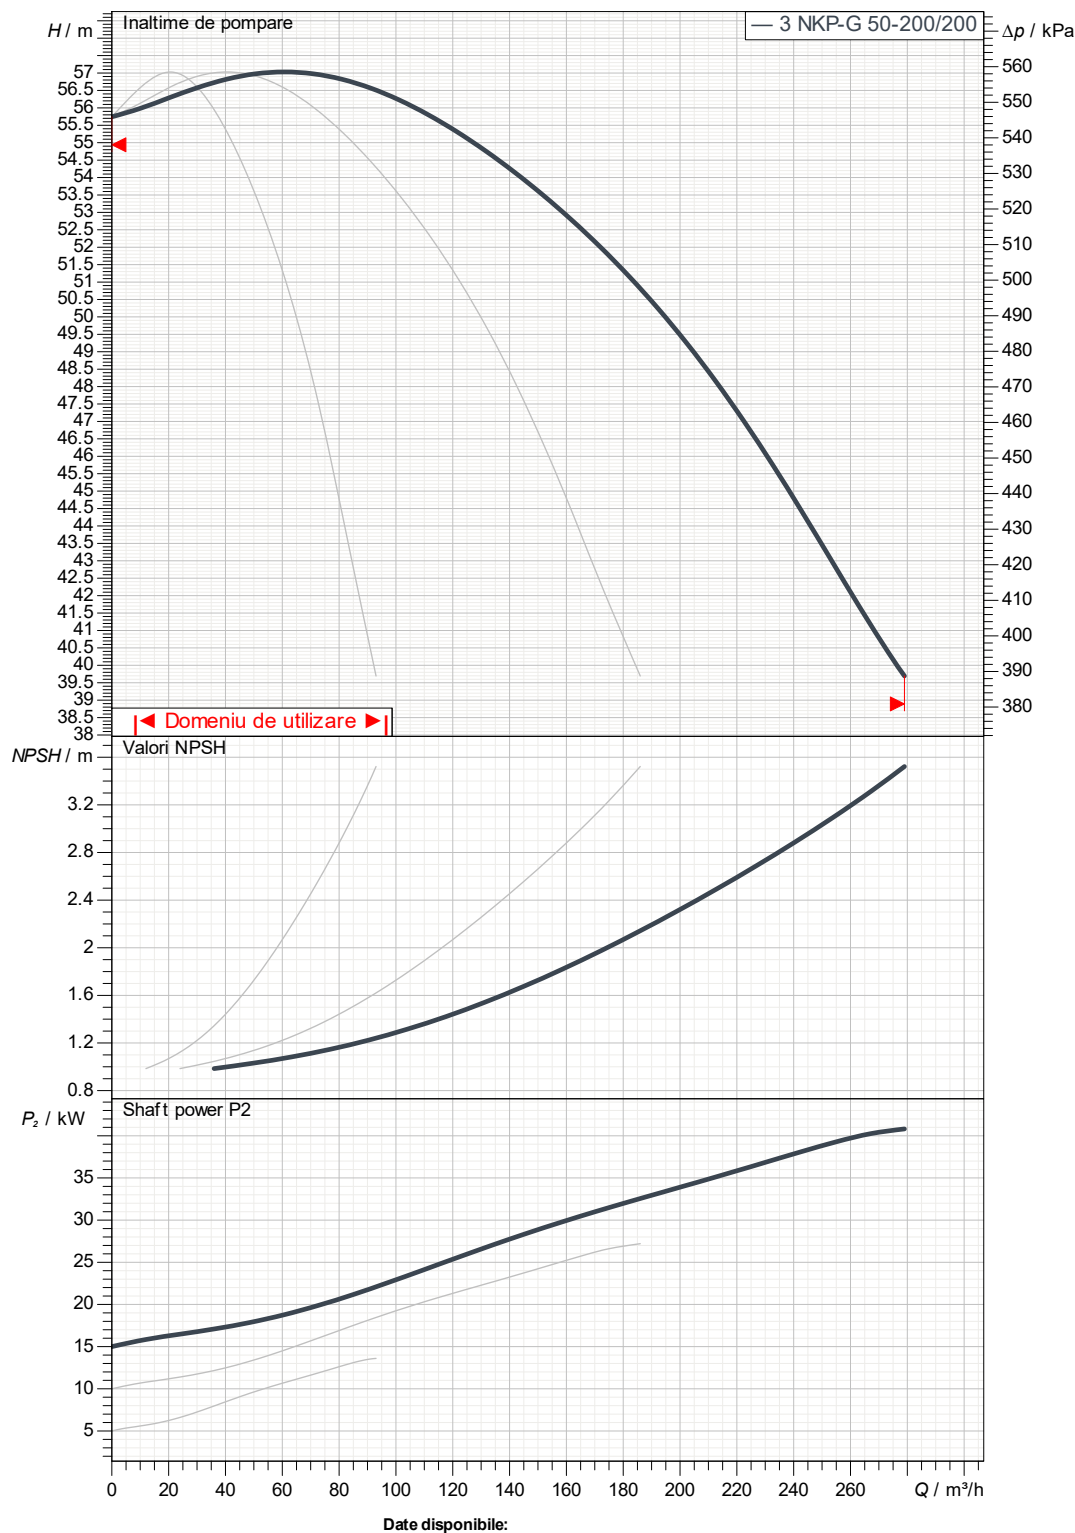

Partea cu aspiratia:
DN 200
1000 kPa

Partea cu refularea:
DN 150
1000 kPa

Debit :

Înălțime de pompare :

Viteza nominala:
2940 1/min

Oferta

ID oferta

Creat de

Creat

05/20/2024

