

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol :

60231378

Customer pos. no.:

Articol:

EVOPLUS 110/180 SAN M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid -10 °C
Temperatura max. fluid 110 °C
EEI: ≤ ***

Presiune minima la nivelul apei:

Temperatura: °C 90 100
Presiune minima la nivelul apei: m 20 25

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit:
Inaltime de pompare:

Materiale

Corp pompa Bronz
Rotor Tecnopolimer
Arbore motor Alumina
Inel de etansare EPDM
Carcasa motorului Die cast aluminium with Cataphoresis
Flansa de inchidere Otel inox
Suport inel de echilibrare EPDM

Curve tolerance according to ISO 9906

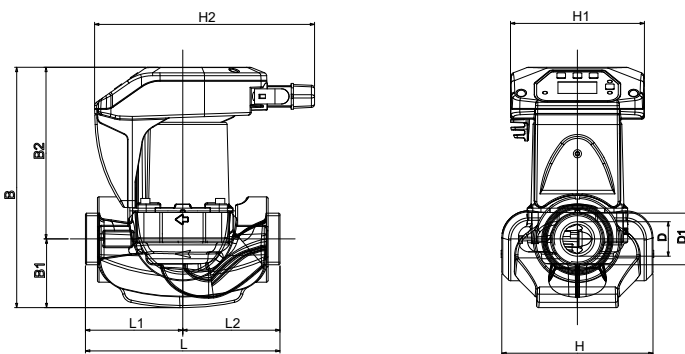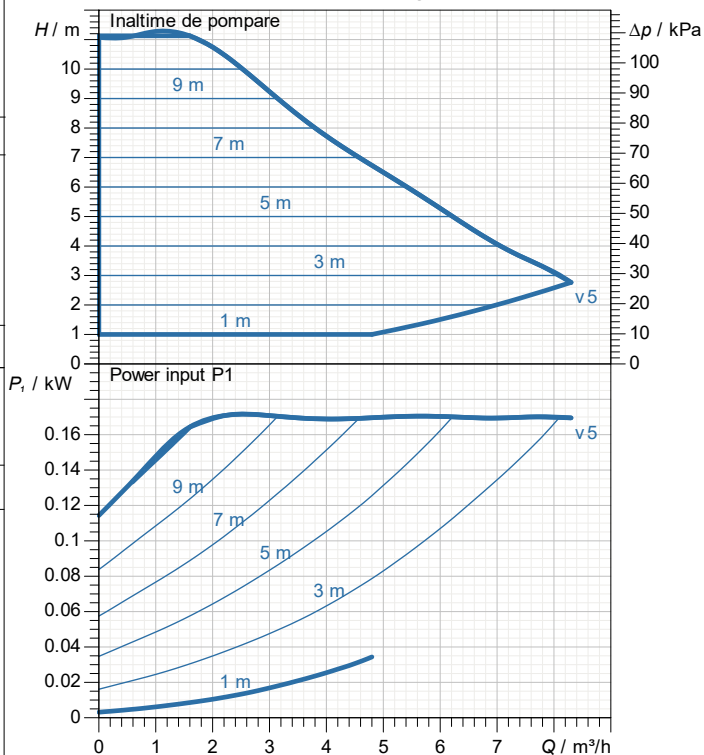

Date motor

Marca: DAB
Max. Power input P1: 0.16 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 1.145 A
Grad de protecție: IP 44

Dimensiuni de gabarit mm

B	224	H1	124				
B1	65	H2	204				
B2	159	L	180				
D	32	L1	90				
D1	1"1/2 G	L2	90				
H	124						

Masa 4.5 kg

Racorduri pompa:


Partea cu aspiratia: 1"1/2 G
Partea cu refularea: 1"1/2 G

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS 110/180 SAN M

Curve tolerance according to ISO 9906

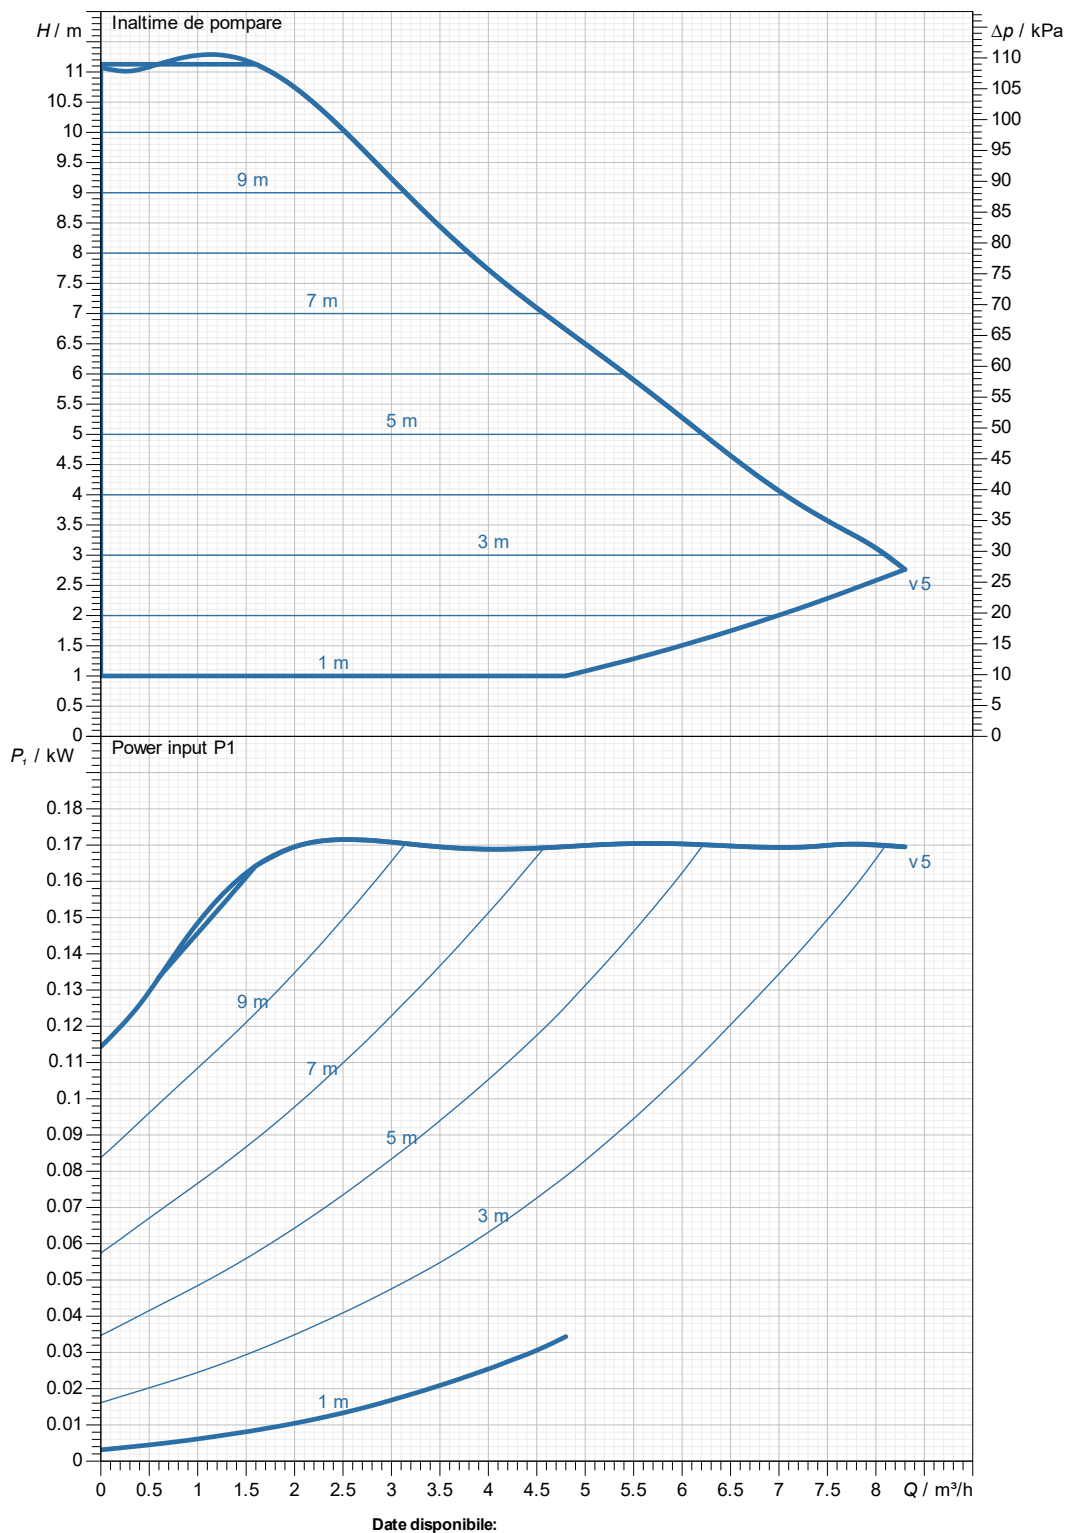

Date disponibile:

Partea cu aspiratia:
1"1/2 G
1600 kPa

Partea cu refularea:
1"1/2 G
1600 kPa

Debit :

Înălțime de pompare :

Viteza nominala:
2900 1/min

Oferta

ID oferta

Creat de



Creat

04/01/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS 110/180 SAN M

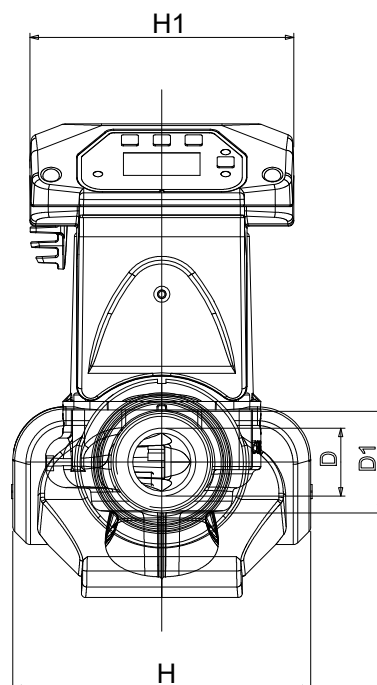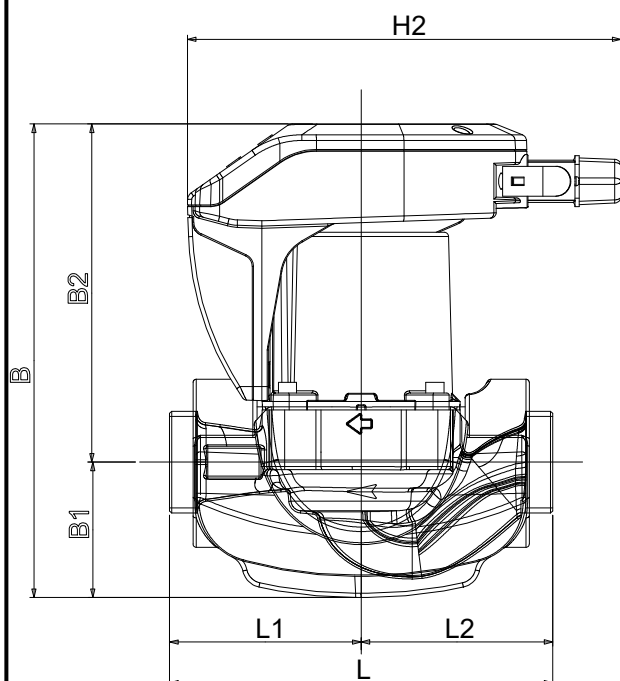

Dimensiuni in mm

Racorduri pompa:

1	B	224					
2	B1	65					Aspiratie
3	B2	159					1"1/2 G
4	D	32					1600 kPa
5	D1	1"1/2 G					
6	H	124					
7	H1	124					Refulare
8	H2	204					1"1/2 G
9	L	180					1600 kPa
10	L1	90					
11	L2	90					

Oferta

ID oferta

Creat de

Creat

04/01/2026