

**Destinatar**

Firma  
Referinta  
Adresa  
Phone  
Fax  
E-mail

**Cod articol :**

60220909

**Customer pos. no.:**

**Articol:**

EVOPLUS B 80/220.40 M

**Date pompa**

Presiune nominala: 1600 kPa  
Temperatura min. fluid -10 °C  
Temperatura max. fluid 110 °C  
EEI : ≤ 0,20

**Presiune minima la nivelul apei:**

Temperatura : °C 90 100  
Presiune minima la nivelul apei: m 20 25

**Date de functionare cerute**

Debit :  
Înălțime de pompare :  
Fluid pompat (%) :  
Temperatura fluid: 20 °C  
Densitate 998.3 kg/m³  
Vascozitate cinematica: 1.005 mm²/s  
Presiune de vapori: 2.34 kPa



**Date disponibile:**

Debit :  
Înălțime de pompare :

**Materiale**

Corp pompa Cast iron 250 UNI ISO 185 with Cataphoresis  
Rotor Tecnopolimer  
Arbore motor Otel inox  
Inel de etansare EPDM  
Carcasa motorului Die cast aluminium with Cataphoresis  
Flansa de inchidere Otel inox  
Suport inel de echilibrare Otel inox

**Curve tolerance according to ISO 9906**

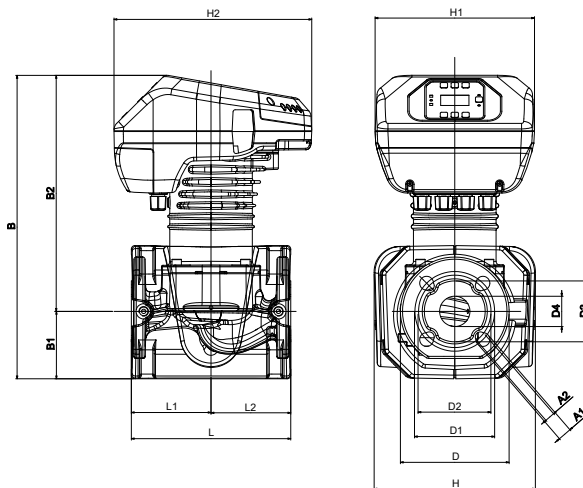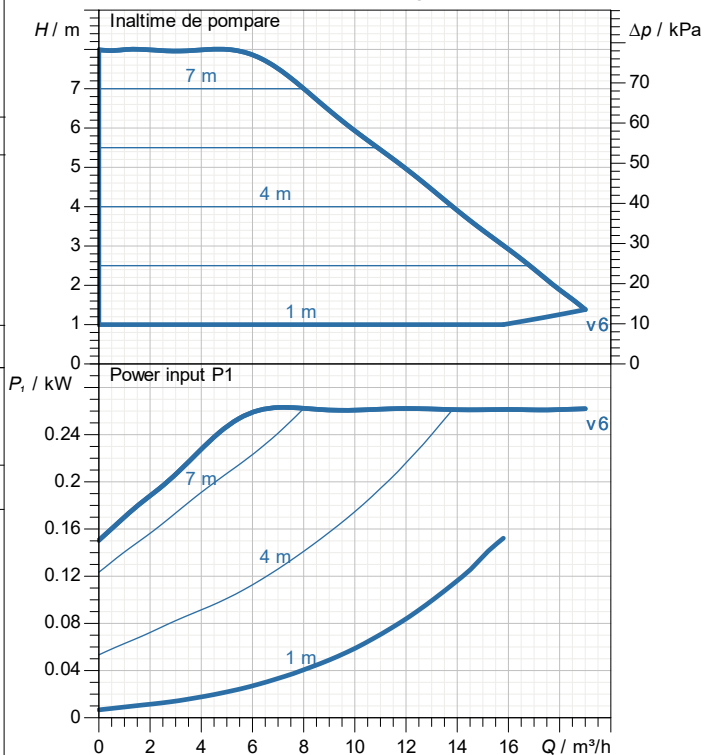

**Date motor**

Marca : DAB  
Max. Power input P1 : 0.26 kW  
Tensiune nominala : 1~ 220-240 V 50 Hz  
Curent nominal : 1.35 A  
Grad de protecție: IP 44

**Dimensiuni de gabarit mm**

|    |     |    |     |    |     |  |  |
|----|-----|----|-----|----|-----|--|--|
| A1 | 19  | D1 | 110 | H2 | 273 |  |  |
| A2 | 14  | D2 | 100 | L  | 220 |  |  |
| B  | 419 | D3 | 84  | L1 | 110 |  |  |
| B1 | 93  | D4 | 42  | L2 | 110 |  |  |
| B2 | 326 | H  | 222 |    |     |  |  |
| D  | 150 | H1 | 220 |    |     |  |  |

**Masa** 20.8 kg

**Racorduri pompa:**

Partea cu aspiratia: DN 40 / PN6, PN10, PN16  
Partea cu refularea: DN 40 / PN6, PN10, PN16



## CURBELOR CHARACTERISTIC

04/15/2026

Pagina 2 / 3


DAB PUMPS S.p.A.  
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy  
Tel. +39 049 5125000 - Fax +39 049 5125950  
[www.dabpumps.com](http://www.dabpumps.com)

Firma  
Referinta  
Adresa  
Phone  
Fax  
E-mail

**Destinatar**

**EVOPLUS B 80/220.40 M**

### Curve tolerance according to ISO 9906

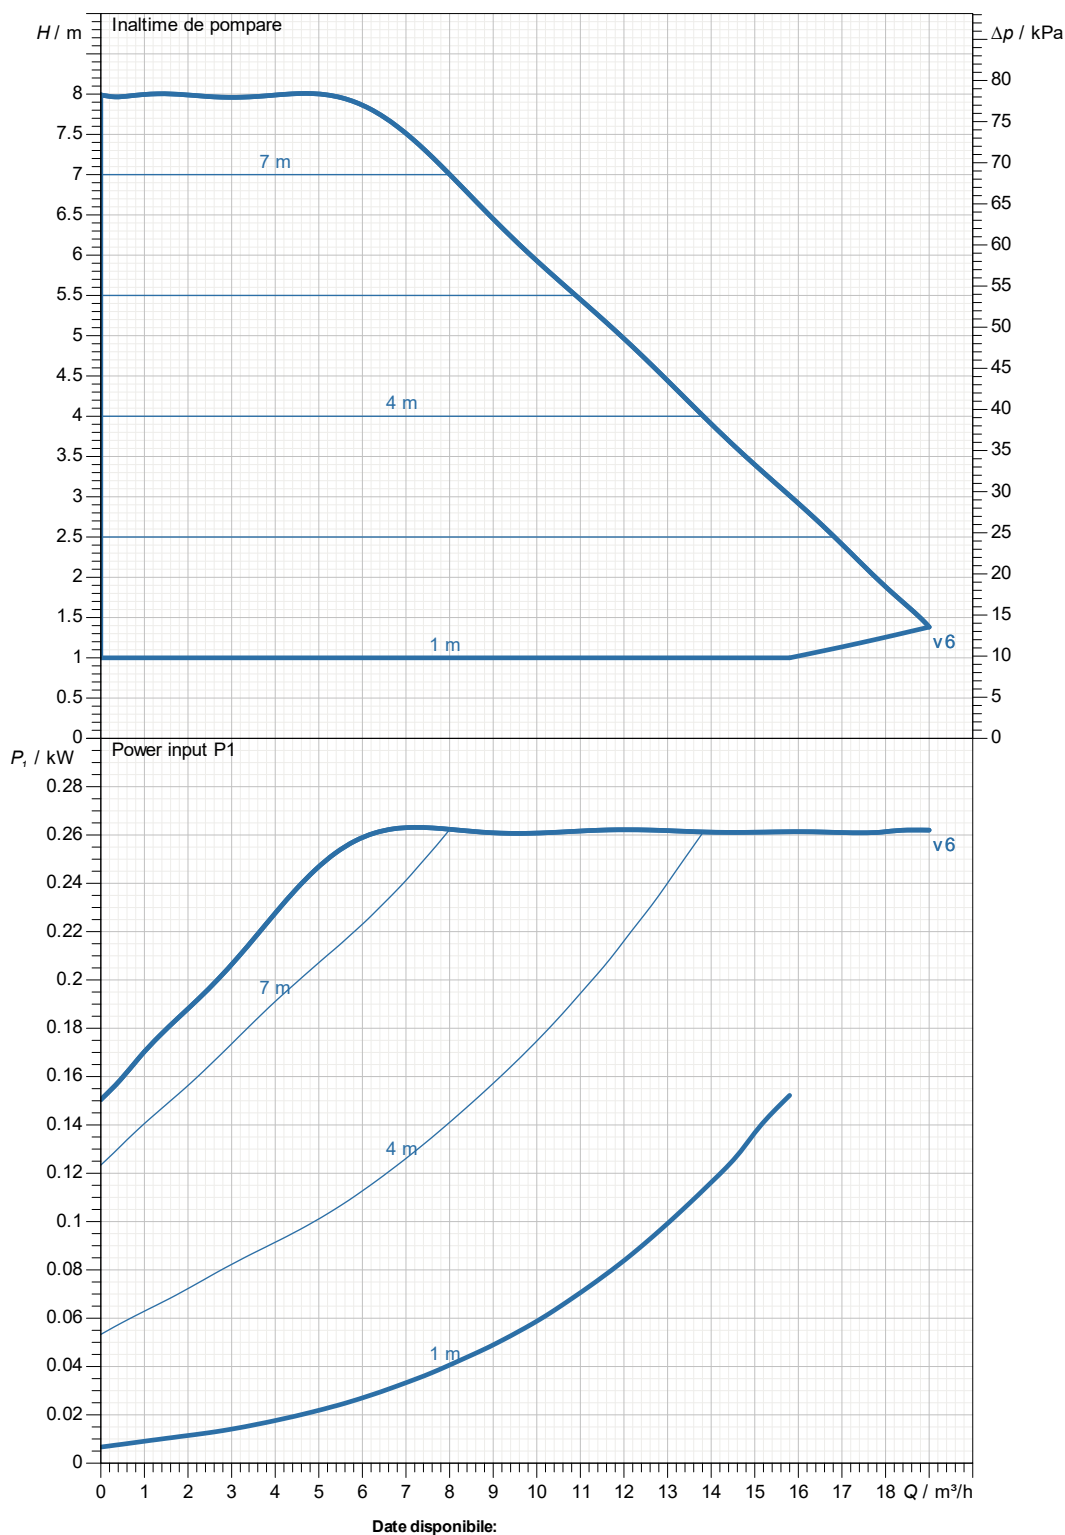

**Date disponibile:**

Partea cu aspiratia:  
DN 40  
PN6, PN10, PN16

Partea cu refularea.  
DN 40  
PN6, PN10, PN16

Debit :

|                       |  |
|-----------------------|--|
| Înaltime de pompare : |  |
|-----------------------|--|

|                  |            |
|------------------|------------|
| Viteza nominala: | 4400 1/min |
|------------------|------------|

|                    |
|--------------------|
| MAIN PROJECT TITLE |
|--------------------|

|                     |
|---------------------|
| BUSINESS PROCESS ID |
|---------------------|

OWNER


|            |  |
|------------|--|
| ISSUE DATE |  |
|------------|--|

04/15/2026

Destinatar

Firma  
Referinta  
Adresa  
Phone  
Fax  
E-mail

## EVOPLUS B 80/220.40 M

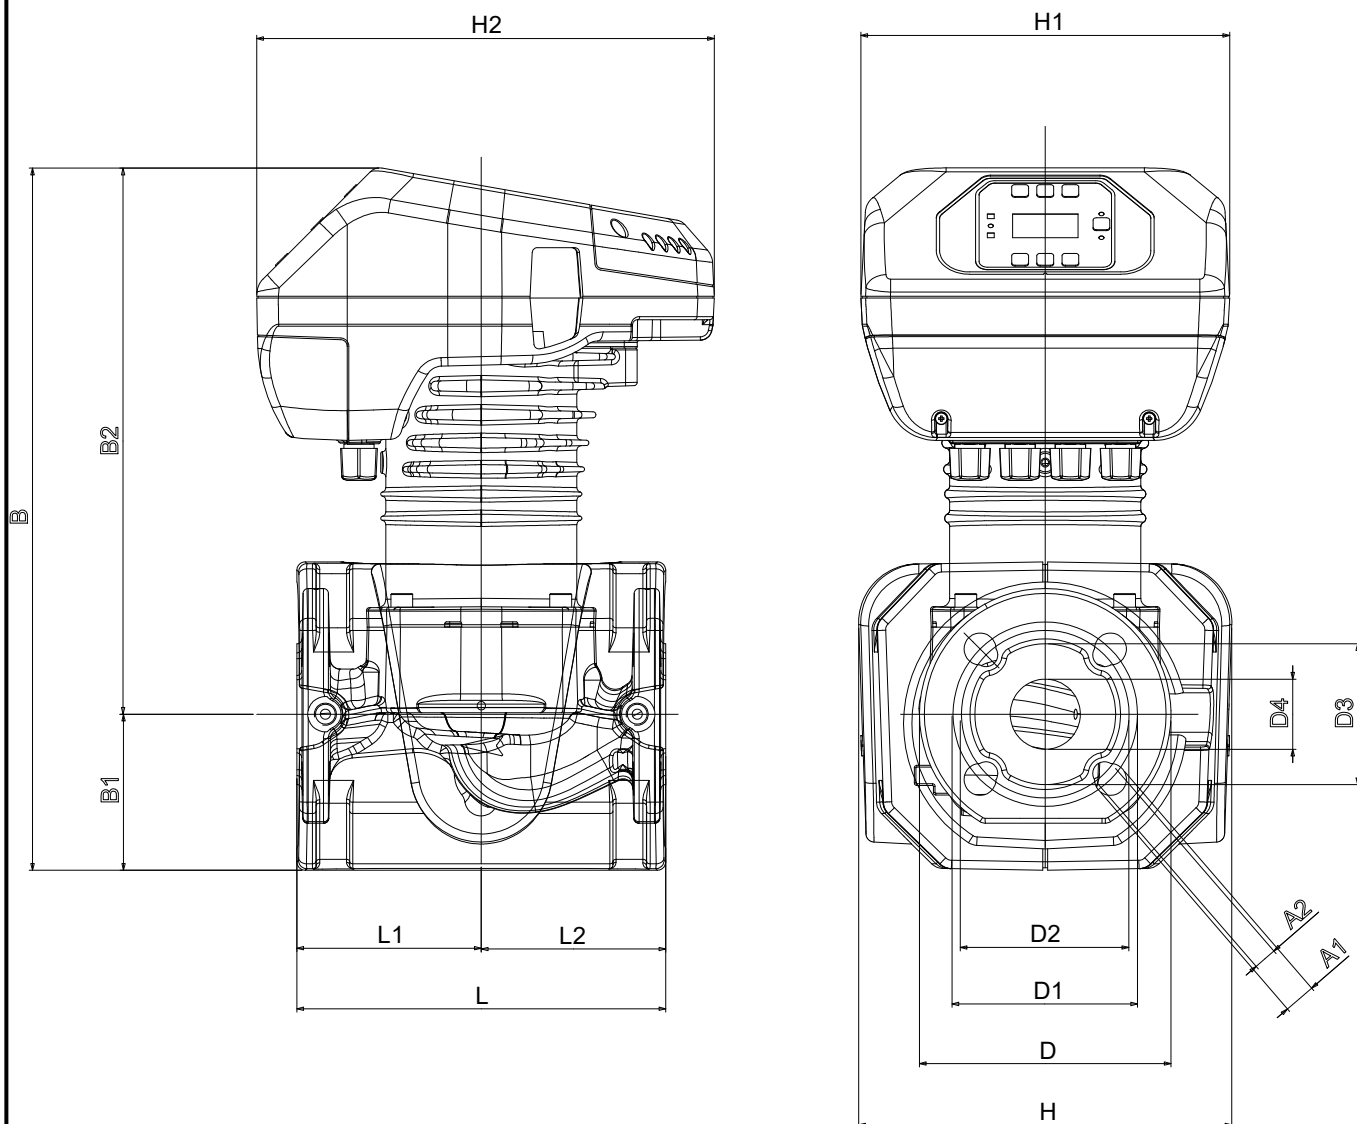

Dimensiuni in mm

Racorduri pompa:

|    |    |     |    |     |  |  |                 |
|----|----|-----|----|-----|--|--|-----------------|
| 1  | A1 | 19  | H1 | 220 |  |  |                 |
| 2  | A2 | 14  | H2 | 273 |  |  |                 |
| 3  | B  | 419 | L  | 220 |  |  | Aspiratie       |
| 4  | B1 | 93  | L1 | 110 |  |  | DN 40           |
| 5  | B2 | 326 | L2 | 110 |  |  | PN6, PN10, PN16 |
| 6  | D  | 150 |    |     |  |  |                 |
| 7  | D1 | 110 |    |     |  |  | Refulare        |
| 8  | D2 | 100 |    |     |  |  | DN 40           |
| 9  | D3 | 84  |    |     |  |  | PN6, PN10, PN16 |
| 10 | D4 | 42  |    |     |  |  |                 |
| 11 | H  | 222 |    |     |  |  |                 |

MAIN\_PROJECT\_TITLE

BUSINESS\_PROCESS\_ID

OWNER\_

ISSUE\_DATE

04/15/2026