

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol : 60231432
Customer pos. no.:

Articol:
EVOPLUS D 150/280.50 M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ 0,20

Presiune minima la nivelul apei:

Temperatura: °C 90 - 100
Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit:
Înălțime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit:
Înălțime de pompare:



Materiale

Corp pompa: Cast iron 250 UNI ISO 185 with Cataphoresis
Rotor: Tecnopolimer
Arbore motor: Otel inox
Inel de etansare: EPDM
Carcasa motorului: Die cast aluminium with Cataphoresis
Flansa de inchidere: Otel inox
Suport inel de echilibrare: Otel inox

Date motor

Marca: DAB
Max. Power input P1: 1 X 0.64 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 1 X 3 A
Grad de protecție: IP 44

Curve tolerance according to ISO 9906 Number of working motors : 1

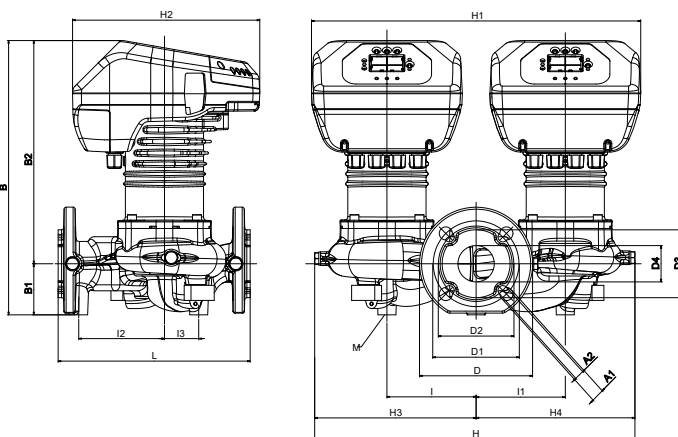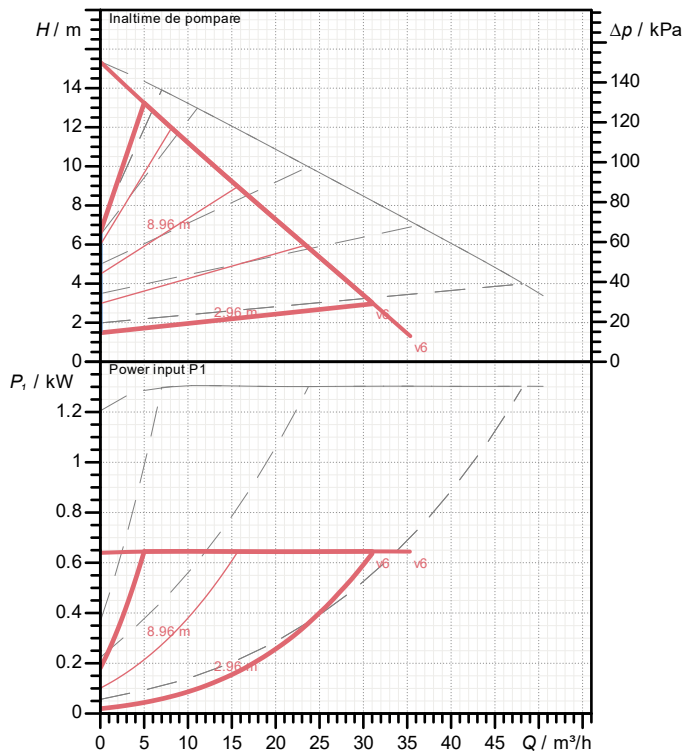

Dimensiuni de gabarit mm

A1	19	D1	125	H2	273	I3	50
A2	14	D2	110	H3	235	L	280
B	400	D3	99	H4	232	M	M12
B1	75	D4	53	I	130		
B2	325	H	467	I1	130		
D	165	H1	480	I2	125		

Masa 41.6 kg

Racorduri pompa:

Partea cu aspiratia: DN 50 / PN6, PN10, PN16
Partea cu refularea: DN 50 / PN6, PN10, PN16


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 150/280.50 M
Number of working motors : 1

Curve tolerance according to ISO 9906

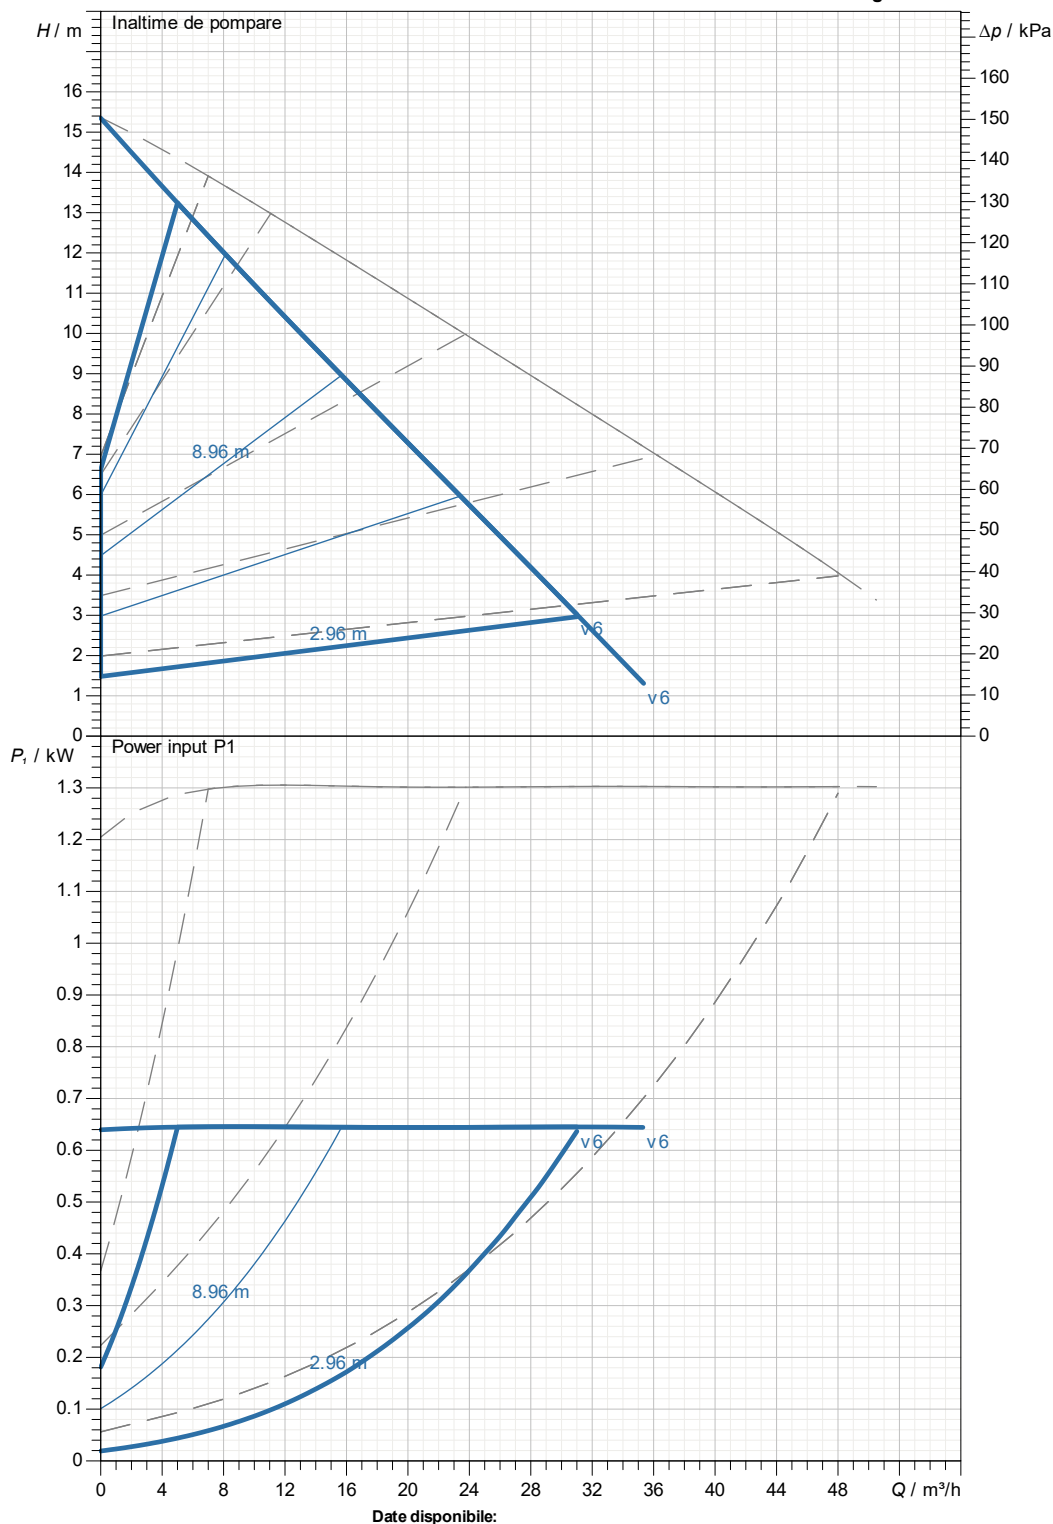

Partea cu aspiratia:

DN 50

PN6, PN10, PN16

Partea cu refularea:

DN 50

PN6, PN10, PN16

Debit :

Inaltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

11/24/2025



DESEN DIMENSIONAL

11/24/2025

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 150/280.50 M

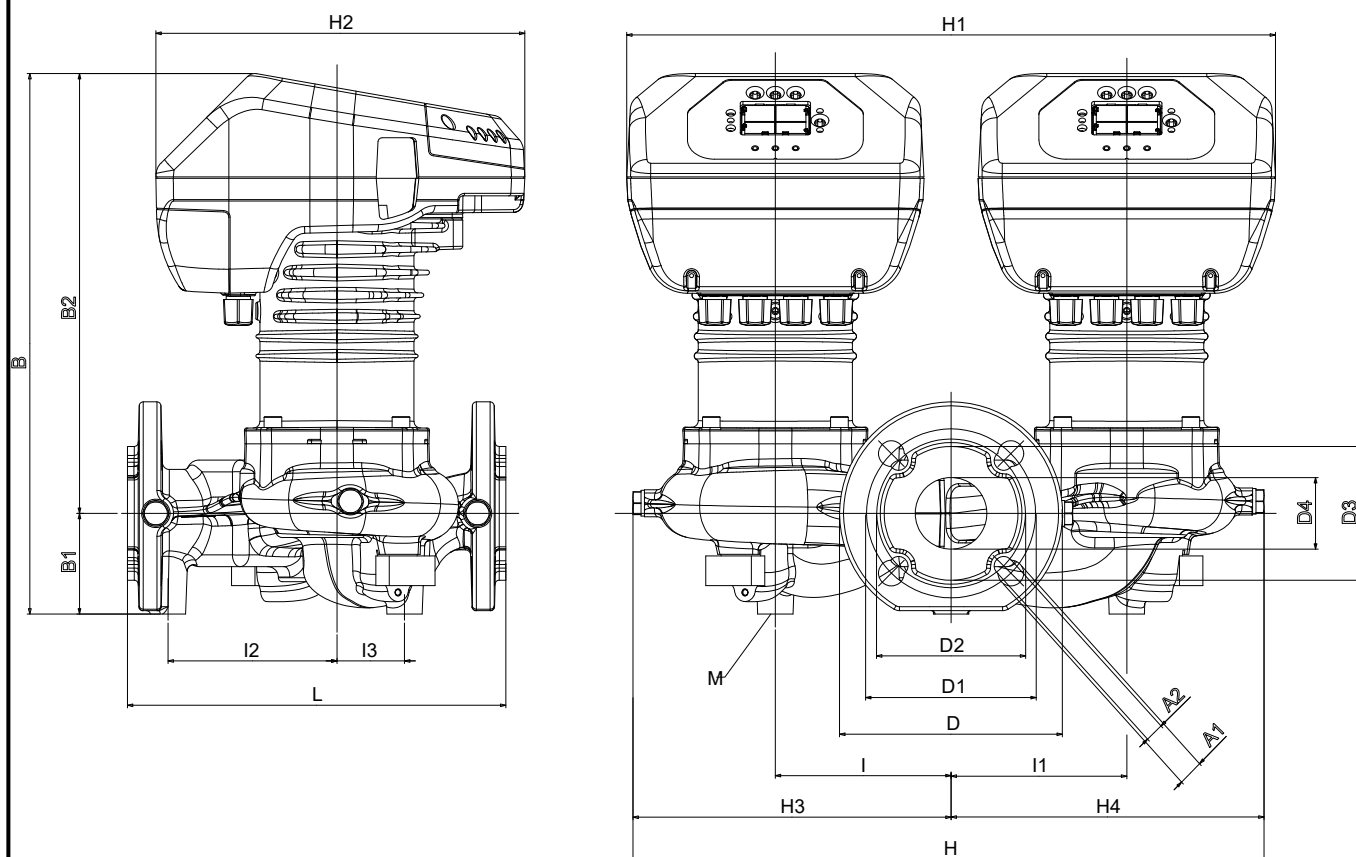

Dimensiuni in mm

Racorduri pompa:

1	A1	19	H1	480			
2	A2	14	H2	273			
3	B	400	H3	235			Aspiratie
4	B1	75	H4	232			DN 50
5	B2	325	I	130			PN6, PN10, PN16
6	D	165	I1	130			
7	D1	125	I2	125			Refulare
8	D2	110	I3	50			DN 50
9	D3	99	L	280			PN6, PN10, PN16
10	D4	53	M	M12			
11	H	467					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

11/24/2025