

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol : **Customer pos. no.:**

60231858

Articol:

EVOSTA3 80/180 X

Date pompa

Presiune nominala: 1000 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ 0,19

Presiune minima la nivelul apei:

Temperatura: °C 90
Presiune minima la nivelul apei: m 10

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit:
Inaltime de pompare:

Materiale

Corp pompa: Cast iron with cataphoresis
Rotor: Ultrason
Arbore: Alumina
Rotor: Fe
Carcasa motorului: AISI 304
Camasa stator: AISI 316
Dop dezaerator: Alama

Curve tolerance according to ISO 9906

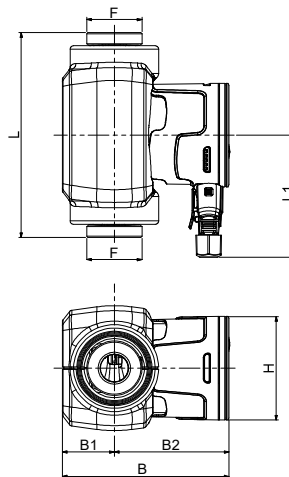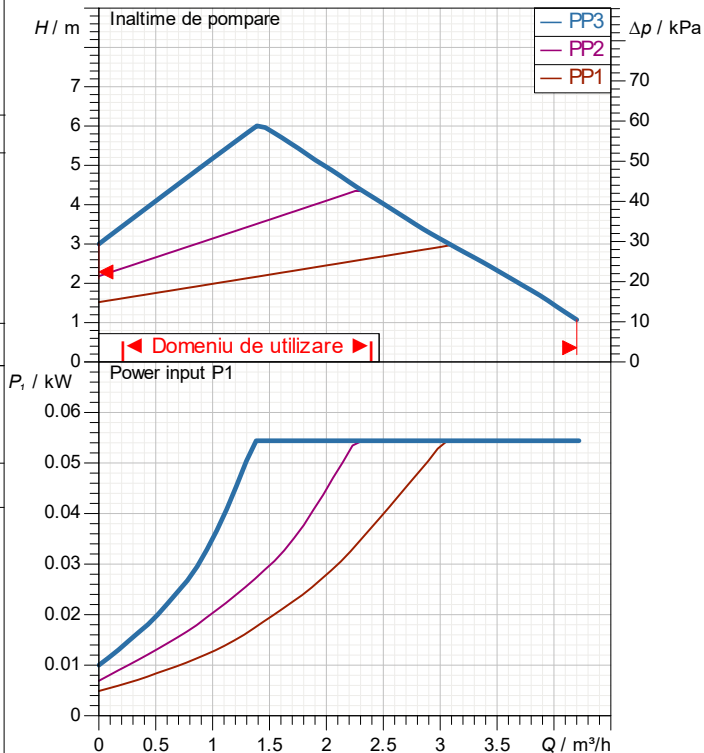

Date motor

Marca: DAB
Max. Power input P1: 0.055 kW
Tensiune nominala: 1~ 230 V 50 Hz
Curent nominal: 0.47 A
Grad de protecție: IP X5

Dimensiuni de gabarit mm

B	144.1	L1	107.5				
B1	45						
B2	99.1						
F	2"						
H	91						
L	180						

Masa 2.38 kg

Racorduri pompa:


Partea cu aspiratia: 2" G
Partea cu refularea: 2" G

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOSTA3 80/180 X

Curve tolerance according to ISO 9906

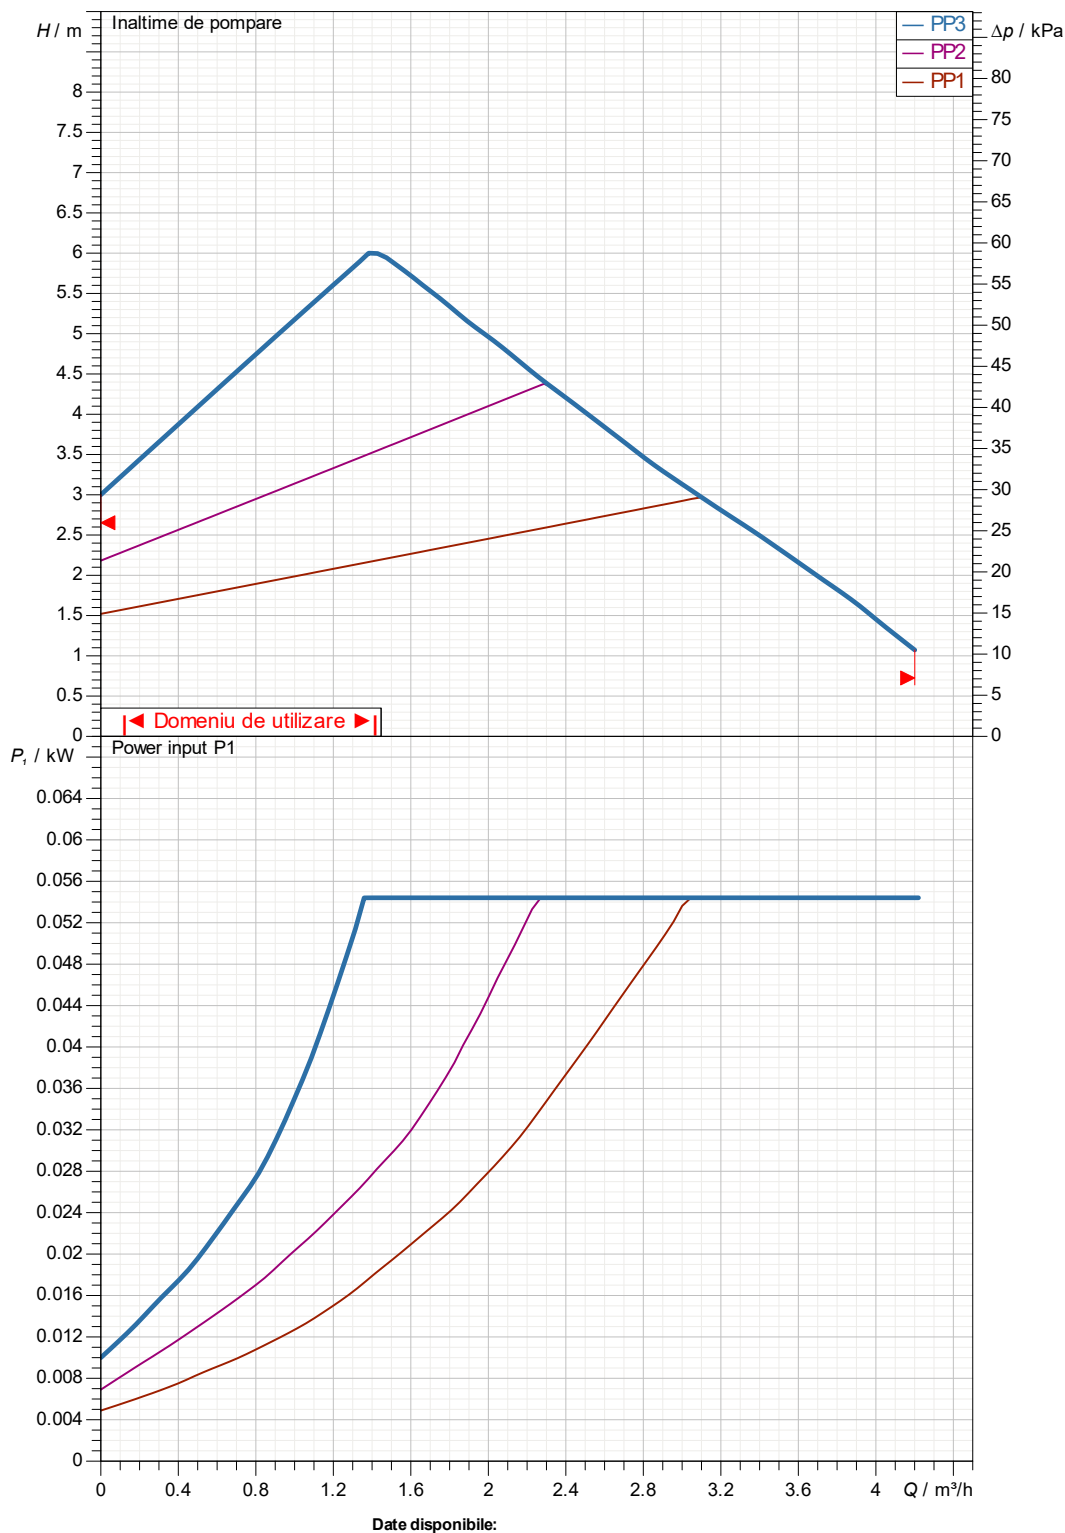

Partea cu aspiratia:
2" G
1000 kPa

Partea cu refularea:
2" G
1000 kPa

Debit :

Înălțime de pompare :

Viteza nominala:
2900 1/min

Oferta

ID oferta

Creat de


Creat

08/10/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOSTA3 80/180 X

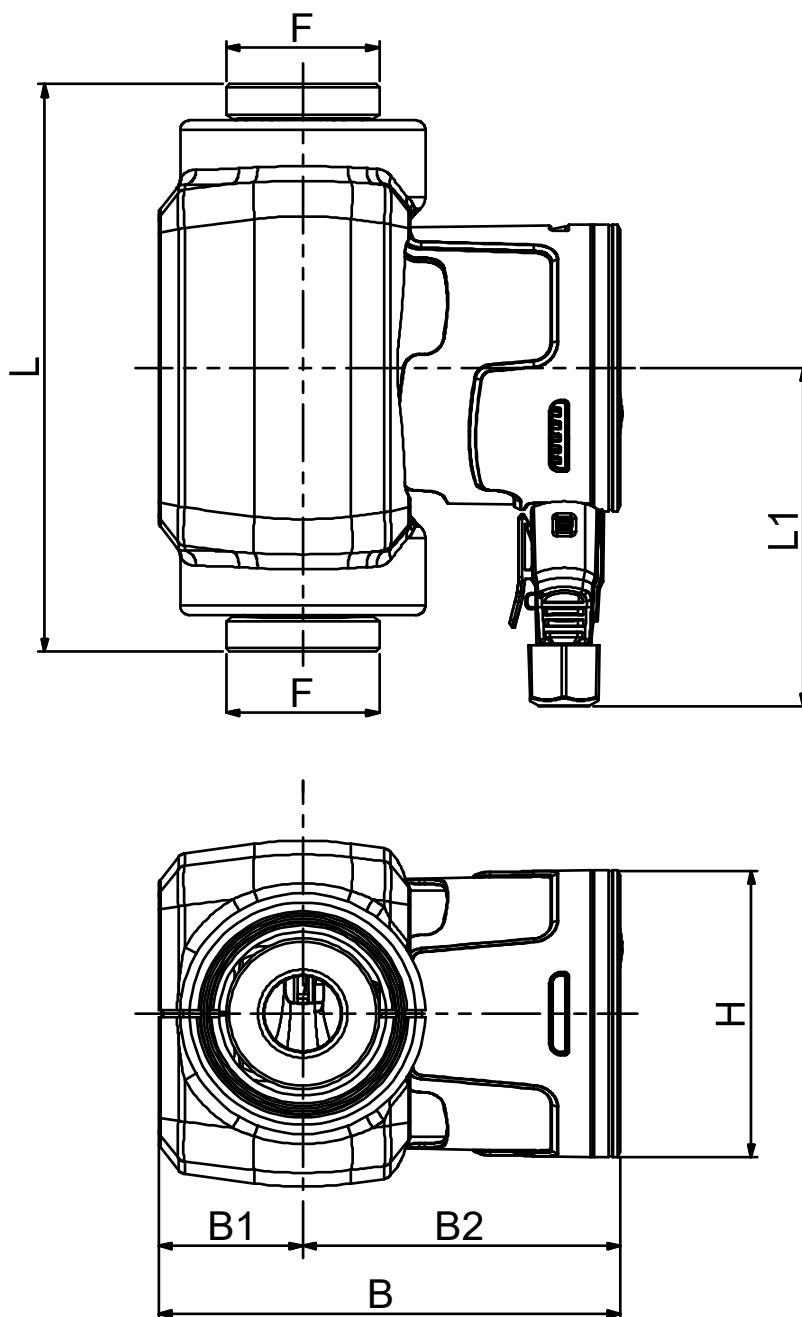

Dimensiuni in mm

Racorduri pompa:

1	B	144.1									
2	B1	45									
3	B2	99.1									
4	F	2"									
5	H	91									
6	L	180									
7	L1	107.5									
8											
9											
10											
11											

Aspiratie
2" G
1000 kPa

Refulare
2" G
1000 kPa

Oferta

ID oferta

Creat de

Creat

08/10/2026