

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60194419

Customer pos. no.:

Articol:

FEKA 600 M-NA 40th - 10m

Date pompa

Free passage : 25 mm
Aspiration level minimum : 38 mm
Max. immersion depth : 7 m
Temperatura min. fluid 0 °C
Temperatura max. fluid 35 °C

Date de functionare cerute

Debit :
Inaltime de pompare :
Fluid pompat : Apă
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit :
Inaltime de pompare :

Materiale

Corp pompa Tecnopolimer
Rotor Tecnopolimer
Garnitura OR Cauciuc NBR
Arbore rotor Stainless Steel AISI 431
Grila de aspiratie Tecnopolimer
Calota motor AISI 304 X5 Cr Ni 1810 UNI 6900/71

Curve tolerance according to ISO 9906

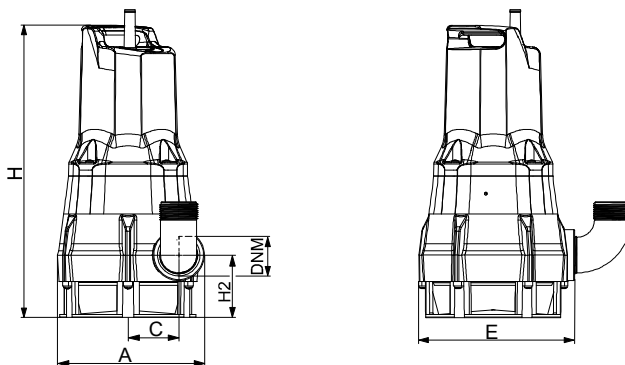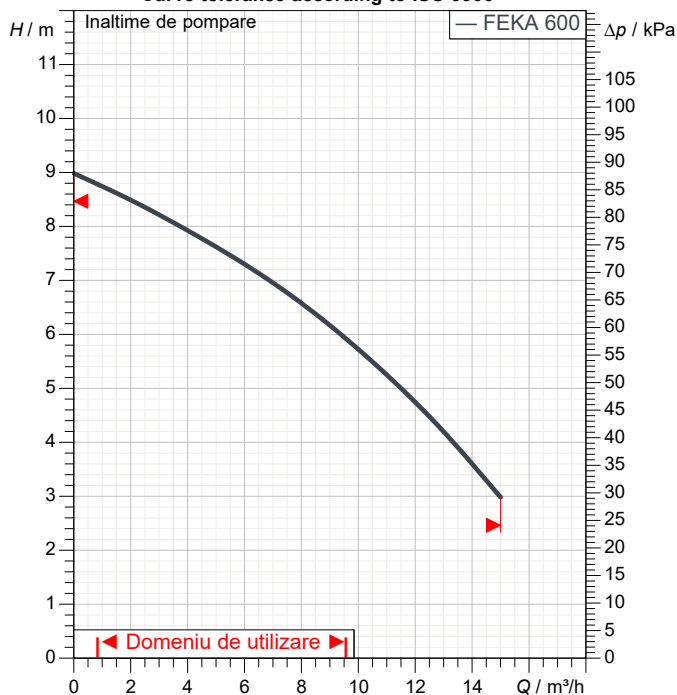

Date motor

Masa 4.6 kg

Dimensiuni de gabarit mm

A	163				
C	56				
DNM	1"1/4 G				
E	174				
H	349				
H2	71				

Racorduri pompa:

Partea cu aspiratia: /
Partea cu refularea: 1" 1/4 GAS / --


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

FEKA 600 M-NA 40th - 10m

Curve tolerance according to ISO 9906

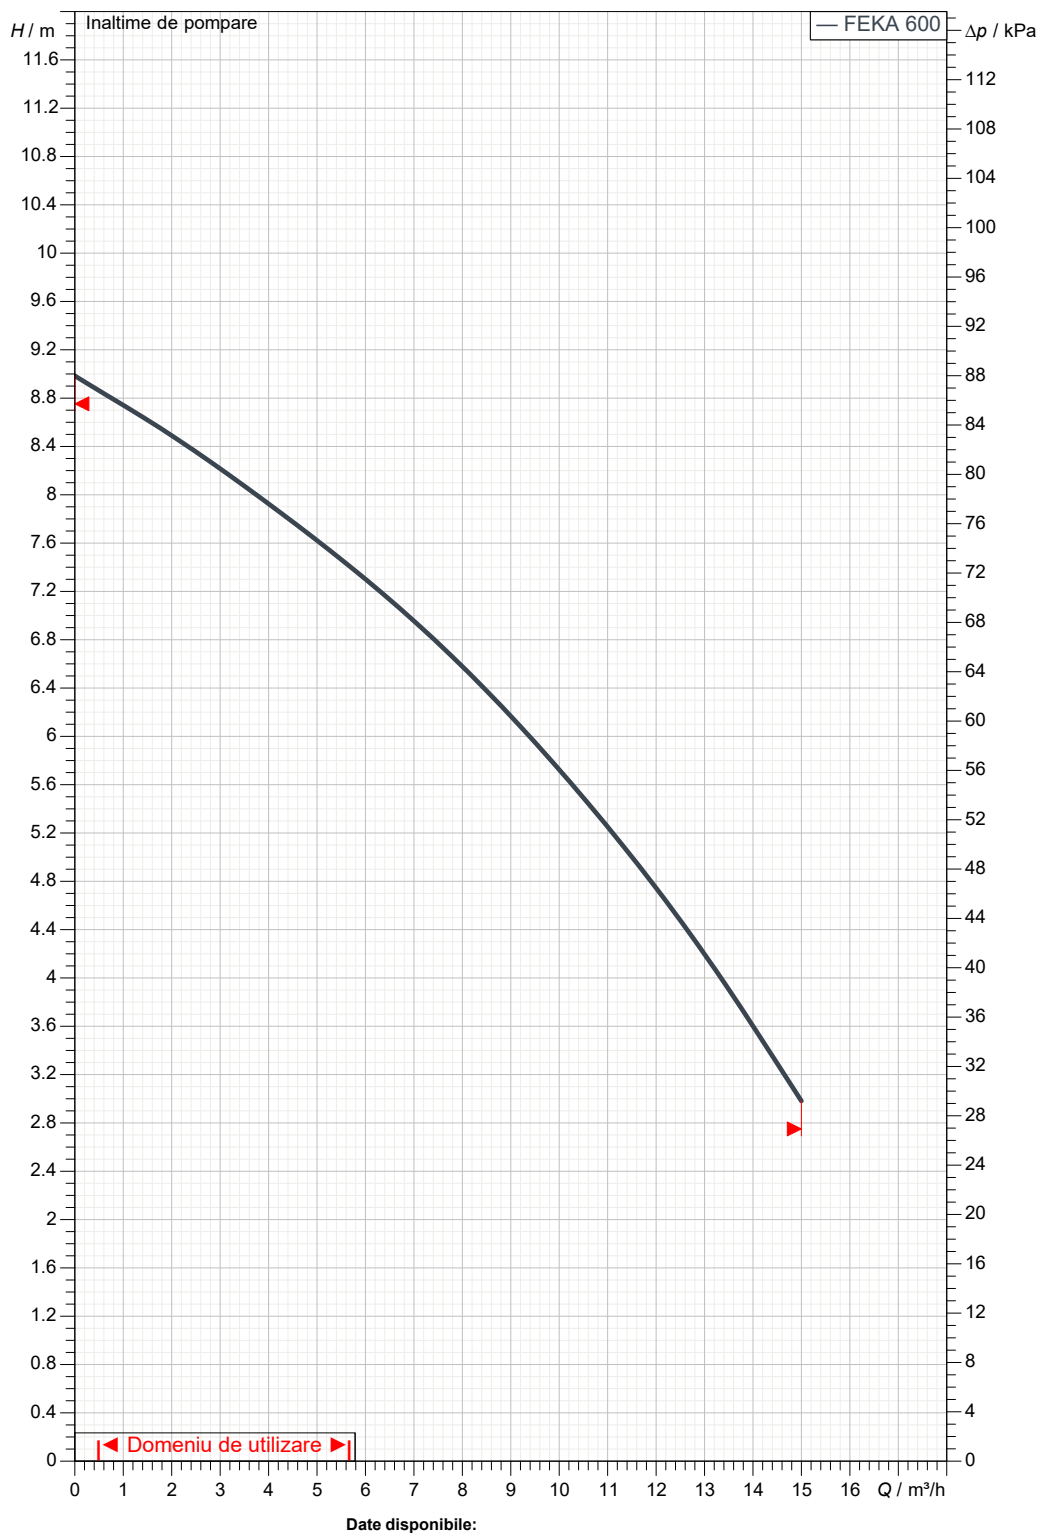

◀ Domeniu de utilizare ▶

Date disponibile:

Partea cu aspiratia:

Partea cu refularea:

1" 1/4 GAS

--

Debit :

Înaltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE

10/11/2023



DESEN DIMENSIONAL

10/11/2023

Pagina 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

FEKA 600 M-NA 40th - 10m

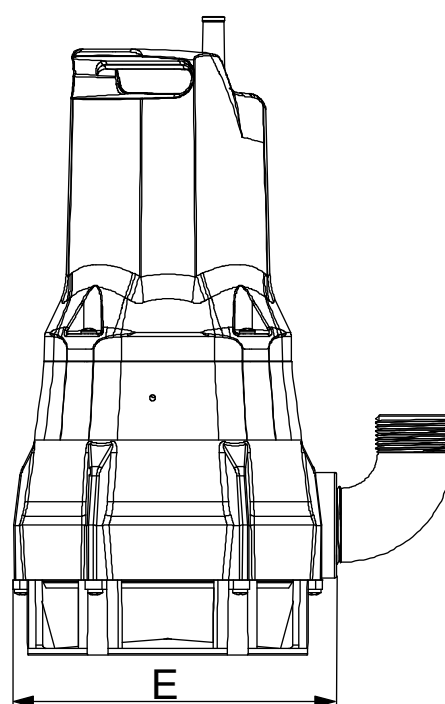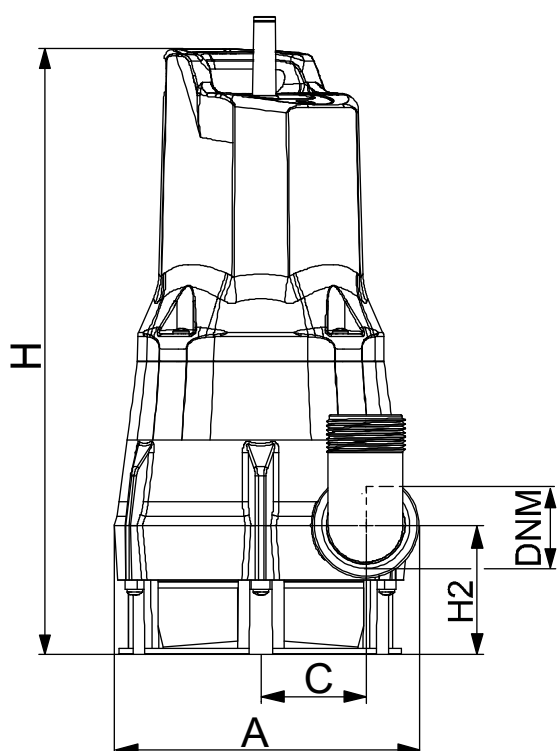

Dimensiuni in mm

Racorduri pompa:

1
2
3
4
5
6
7
8
9
10
11

A 163
C 56
DNM 1"1/4 G
E 174
H 349
H2 71

Aspiratie

Refulare
1" 1/4 GAS
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE

10/11/2023